

os_muldif

Toshio Oshima

March 4, 2025

Contents

1	List of Functions	3
1.1	Functions related to differential operators	3
1.1.1	Fundamental functions	3
1.1.2	Fractional calculus	4
1.1.3	Some operators	7
1.2	Useful functions	8
1.2.1	Extended function	8
1.2.2	Numbers	9
1.2.3	Polynomials and rational functions	9
1.2.4	Functions with real/complex variables	9
1.2.5	Lists and vectors	9
1.2.6	Matrices	9
1.2.7	Strings	9
1.2.8	Permutations	9
1.2.9	TeX	9
1.2.10	Lines and curves	10
1.2.11	Drawing curves and graphs	10
1.2.12	Applications	10
1.2.13	Environments	10
2	Risa/Asir	11
2.1	Risa/Asir and os_muldif.rr	11
2.1.1	Install os_muldif.rr	12
3	Functions	14
3.1	Functions related to differential operators	14
3.1.1	Fundamental functions	14
3.1.2	Fractional calculus	33
3.1.3	Some operators	97
3.2	Useful functions	99
3.2.1	Extended function	99
3.2.2	Numbers	108
3.2.3	Polynomials and rational functions	108
3.2.4	Functions with real/complex variables	111
3.2.5	Lists and vectors	111
3.2.6	Matrices	113

3.2.7	Strings	113
3.2.8	Permutations	113
3.2.9	TeX	113
3.2.10	Lines and curves	123
3.2.11	Drawing curves and graphs	123
3.2.12	Applications	123
3.2.12.1	Make tables	123
3.2.12.2	Make tables and matrices	123
3.2.12.3	Mathematical tables	123
3.2.12.4	Table of score distribution	123
3.2.12.5	Tayler's expansion	123
3.2.12.6	Slide scale	123
3.2.13	Environments	123
3.2.14	Supplement	130
3.2.14.1	Input matrices	130
3.2.14.2	Plane figure	130
3.2.14.3	Function by list	130
3.2.14.4	Analyze functions with values in real/complex numbers	130
3.2.14.5	Data by table	130
3.2.14.6	Finite sets	130
3.3	Functions in the original library	130
3.4	Functions in the contributed library	130
Index		131

os_muldif.rr for Risa/Asir

A library for computing (ordinary/partial) differential operators

by Toshio Oshima

This note is a product of an on-going project translating the manual `os_muldif.pdf` of a library `os_muldif.rr` of Risa\Asir into English. Currently this note contains only a small part of `os_muldif.pdf` related to the functions which analyze linear ordinary differential equations with polynomial coefficients.

The explanation of the functions without a short explanation starting with ":" is not yet translated. The number at the head of the name of a function coincides with the one in `os_muldif.pdf`. The number skipped in this note corresponds to a function which is not yet explained in this note.

1 List of Functions

[=

1.1 Functions related to differential operators

The following functions are in a module and we call the functions by putting `os_md.` at the head such as `os_md.muldo()`.

1.1.1 Fundamental functions

1. `muldo(p1, p2, [x, ∂x] | lim=n)` or `muldo(p1, p2, x | lim=n)`
`muldo(p1, p2, [[x1, ∂x1], [x2, ∂x2], ...] | lim=n)`
:: Returns the product of (a matrix of) ordinary (partial) differential operators whose coefficients are rational functions (or elementary functions) ($\Leftarrow [\partial_x, x] = 1$)
2. `caldo([p1, p2, ...], [x, ∂x] | mono=f)` or `caldo([p1, p2, ...], [[x1, ∂x1], ...] | mono=f)`
:: Returns the sum of products of differential operators
3. `muledo(p1, p2, [x, ∂x])` or `muledo(p1, p2, x)`
:: Returns the product (matrices) of differential operators of Euler type ($\Leftarrow [\partial_x, x] = x$)
4. `transpdo(p, [[x1, ∂x1], [x2, ∂x2], ...], [[y1, ∂y1], [y2, ∂y2], ...] | ex=1, inv=f)`
:: Transformation of differential operator p by $x_i \mapsto y_i = y_i(x)$, $\partial_{x_j} \mapsto \partial_{y_j} = c_j(x) + \sum_\nu a_{j\nu}(x)\partial_{x_\nu}$
5. `translpdo(p, [[x1, ∂x1], [x2, ∂x2], ...], mat)`
:: Transforms a differential operator p by the coordinate transformation $x_i \mapsto \sum_j (mat)_{ij} x_j$
6. `transppow([[x1, ∂x1], ..., [xn, ∂xn]], m)`
:: Coordinate transformations by products of powers of coordinates
7. `appldo(p, r, [x, ∂x] | Pfaff=1)` or `appldo(p, r, [[x1, ∂x1], [x2, ∂x2], ...])`
:: Applies a (matrix of) differential operator to a (matrix of) rational function or elementary function or a Pfaffian system
8. `adj(p, [x, ∂x])` or `adj(p, [[x1, ∂x1], [x2, ∂x2], ...])`
:: Returns the formal adjoint of a (matrix of) differential operator p
9. `psymbol(p, [[x1, ∂x1], [x2, ∂x2], ...])`
:: principal symbol of differential operator
10. `sftpexp(p, [x, ∂x], q, r)` or `sftpexp(p, [[x1, ∂x1], ..., q, r])`
:: Returns $q^{-r} \circ p \circ q^r$
11. `appleido(p, r, [x, ∂x])`
:: Applies a differential operator of Euler type to a rational function
12. `divdo(p1, p2, [x, ∂x] | rev=1)`
:: Calculates divisions of ordinary differential operators

13. **mygcd**($p_1, p_2, [x, \partial_x]$ | **rev**=1, **dviout**=n) or **mygcd**($p_1, p_2, [x]$ | **rev**=1, **dviout**=n)
 $\text{mygcd}(p_1, p_2, x | \text{dviout}=n)$, $\text{mygcd}(p_1, p_2, 0 | \text{dviout}=n)$
:: GCD of ordinary differential operators (or polynomials of x or positive integers) p_1 and p_2
14. **mylcm**($p_1, p_2, [x, \partial_x]$ | **rev**=1) or **mylcm**($p_1, p_2, [x]$ | **rev**=1)
 $\text{mylcm}(p_1, p_2, x)$, $\text{mylcm}(p_1, p_2, 0)$
:: LCM of ordinary differential operators (or polynomials of x or positive integers) p_1 and p_2
15. **m1div**($m, n, [x, \partial_x]$) or **m1div**($m, n, [x]$) or **m1div**(m, n, x)
:: Returns $R = [R[0], R[1]]$ such that $m = R[1](\partial_x - n) + R[0]$ (or $m = R[1](x - n) + R[0]$) for a square matrix m of differential operators with coefficients in rational functions (or polynomials of x)
16. **qdo**($p_1, p_2, [x, \partial_x]$)
:: Returns the list $[q_1, q_2]$ of differential operators satisfying $q_1 p_2 u = 0$ and $q_2 p_2 u = u$ for a differential equation $p_1 u = 0$
17. **mdivisor**($m, [x, \partial]$ | **trans**=1, **step**=1, **dviout**=t)
 $\text{mdivisor}(m, x | \text{trans}=1, \text{step}=1, \text{dviout}=t)$, $\text{mdivisor}(m, 0 | \text{trans}=1, \text{step}=1, \text{dviout}=t)$
:: Elementary divisors of a matrix of ordinary differential operators/polynomials with coefficients in rational functions/integers
18. **sqrtdo**($p, [x, \partial_x]$) ?
19. **toeul**($p, [x, \partial_x], n$)
:: Expresses a (Fuchsian) differential operator p in Euler type at $x = n$
20. **fromeul**($p, [x, p_x], n$)
:: Transforms the differential operator p of Euler type into normal form (the above inverse)
21. **expat**($p, [x, \partial_x], n$)
:: Returns characteristic exponents of a differential operator p at a regular singular point $x = n$
22. **sftexp**($p, [x, \partial_x], n, r$)
:: Returns $(x - n)^{-r} \circ p \circ (x - n)^r$
23. **fractrans**($p, [x, \partial_x], n_0, n_1, n_2$)
:: Transforms p by the linear fractional transformation of x with $(n_0, n_1, n_2) \mapsto (0, 1, \infty)$
24. **chkexp**($p, [x, \partial_x], n, r, m$)
:: Returns condition so that p has the exponent $[r]_{(m)}$ at $x = n$
25. **soldif**($p, [x, \partial_x], n, q, m$)
26. **okuboetos**($p, [x, \partial_x]$ | **diag**=[c_1, c_2, \dots])
:: Transforms a single ODE of Okubo type to 1st order Okubo system
27. **integdlog**($[f_i], x | \text{raw}$ =1)
Get integrability condition of Pfaffian system $du = \sum_i A_i d \log f_i u$
28. **stoe**($p, [x, dx], m$)
:: Converts a first order system of ODE to a single ODE
29. **etos**($p, [x, dx], m$)
:: Converts a single ODE to a first order system of ODE
30. **dform**($\ell, x | \text{dif}$ =1, **log**=1)
:: Calculates differential 1-form $\sum \ell[i][0] d(\ell[i][1])$ or 2-form $\sum \ell[i][0] d(\ell[i][1]) \wedge d(\ell[i][2])$ with variables $x[0], x[1], \dots$. Option **dif**=1 means external derivative of 1-form
31. **solpokubo**($p, [x, \partial_x], n$)
:: Returns eigenvalues and eigenpolynomials of a single ODE of Okubo type
32. **getSSE**($p, [x, y, \dots]$ | **get**=s)
:: Get singularities, rank,... of holonomic systems defined by the ideal p etc.

1.1.2 Fractional calculus

The functions in this section realize the results of [O3], [O5], [O7], [O9] and [O10].

33. `laplace`($p, [x, \partial_x]$) or `laplace`($p, [[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$)
 :: (partial) Laplace transform of a differential operator p
34. `laplace1`($p, [x, \partial_x]$) or `laplace1`($p, [[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$)
 :: Inverse of (partial) Laplace transform of a differential operator p
35. `mc`($p, [x, \partial_x], r$)
 :: Middle convolution $mc_r(p)$ of a differential operator p
36. `mce`($p, [x, \partial_x], n, r$)
 :: Transformation p into $(\partial_x - n)^{-r} \circ p \circ (\partial_x - n)^r$
37. `rede`($p, [x, \partial_x]$) or `rede`($p, [[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$)
 :: Reduced representative of a differential operator p
38. `ad`($p, [x, \partial_x], f$)
 :: Transform of a differential operator p defined by $\partial_x \rightarrow \partial_x - f$
39. `add`($p, [x, \partial_x], f$)
 :: Addition of a differential operator p defined the map $\partial_x \rightarrow \partial_x - f$, namely, `rede(ad())`
40. `vadd`($p, [x, \partial_x], [[c_0, r_0], [c_1, r_1], \dots]$)
 :: Versal addition $\text{add}(p, [x, \partial_x], \sum_{j \geq 0} \frac{r_j x^j}{\prod_{\nu=0}^j (1 - c_\nu x)})$
41. `addl`($p, [x, \partial_x], f$)
 :: `laplace1(add(laplace()))`
42. `cotr`($p, [x, \partial_x], f$)
 :: Transform of a differential operator p defined by $x \mapsto f(x)$
43. `rcotr`($p, [x, \partial_x], f$)
 :: Reduced representative of the transformation P defined by $x \mapsto f(x)$
44. `s2sp`($p | \text{num}=1, \text{std}=k, \text{short}=1$)
 :: Converts a list of lists of numbers to and from its expression using a list of strings
45. `s2csp`($p | n=f$)
 :: Converts expressions of a spectral type with unramified irregular singularities
46. `chkspt`($m | \text{mat}=1, \text{opt}=t, \text{dumb}=1, \text{show}=1$) or `fspt`(m, t)
 :: Checks a tuple of partitions m (spectral type) or a generalized Riemann scheme (GRS) and returns $[pts, ord, idx, fuchs, rod, redsp, fspt]$
 $\text{opt} = "sp", "basic", "construct", "strip", "short", "long", "sort", "idx"$
47. `chkcsp`($m | \text{show}=1$)
 :: analyze spectral type of ODE with unramified irregular singularities
48. `spgen`($n | \text{eq}=1, \text{str}=1, \text{std}=f, \text{pt}=[k, \ell], \text{sp}=m, \text{basic}=1$)
 :: Gets rigid tuples of partitions with the rank $\leq n$ (or the orbit of a given tuple)
 If $n \leq 0$, fundamental tuples with the index of the rigidity n are obtained.
49. `sprotoot`($p, t | \text{dvout}=1, \text{only}=k, \text{sym}=t, \text{null}=1$)
 :: Returns informations of the root corresponding to a spectral type $t = "base", "length", "type", "part", "pair", "pairs", sp$
50. `spbasic`($k, d | \text{str}=1, \text{pt}=[k, \ell]$)
 :: Returns the list of fundamental spectral types with rank d whose index of rigidity equals k
51. `sp2grs`($m, a, \ell | \text{mat}=1$)
 :: Generates generalized Riemann scheme with a given spectral type
52. `ssubgrs`(m, ℓ)
53. `mcgrs`($m, [r_1, r_2, \dots, r_n] | \text{mat}=1, \text{slm}=[[k_1, k_2, \dots], m']$)
 :: Applies middle convolutions and additions successively to a generalized Riemann scheme or a sum of residue matrices
54. `mcop`($p, [r_1, r_2, \dots, r_n], [x, x_1, x_2, \dots]$)
 :: Applies middle convolutions and additions successively to a (partial) differential operator p
55. `redgrs`($m | \text{mat}=1$)

:: Returns 1-step reduction of generalized Riemann scheme of Fuchsian differential equation

56. **getbygrs**(*m,t|perm=ℓ,var=v,pt=[p₁,…],mat=1*) or
getbygrs(*m,[t,s₁,s₂,…]|perm=ℓ,var=v,pt=[p₁,…],mat=1*)
:: Analyzes Fuchsian ODE defined by generalized Riemann scheme (GRS) (GRS may be given in a short form or a spectral type)
t="reduction", "construct", "connection", "operator", "series", "TeX", "Fuchs",
"basic", "", "All", "irreducible", "recurrence"
s="TeX", "dviout", "keep", "simplify", "short", "general", "operator",
"irreducible", "sft", "top0", "x1", "x2"
 ℓ is a permutation or transposition of singular points (cf. **mperm()**), **var** are variables of exponents (cf. **sp2grs()**), *p₁,…* are position of singular points (except for ∞).
57. **spslm**(*m,[k₁,k₂,…]*)
:: Gets a semilocal monodromy of a rigid linear ordinary differential equation
58. **shiftop**(*ℓ,s|zero=1,raw=k,all=t,dviout=1*)
:: Gets the shift operator of rigid ODE with a spectral type ℓ corresponding to a shifts
59. **shiftPfaff**(*a,b,g,x,[μ₁,μ₂]*)
:: Transformation of an adjacent relation of Pfaffian systems under a middle convolution
60. **conf1sp**(*m|x2=±1,conf=0*)
:: Confluence (Poincare rank 1) of a differential operator with spectral type *m*
61. **pf2kz**(*m|all=1*)
:: Converts a Pfaffian system *m* of *n* variables to a KZ system of *n+2* variables
62. **confexp**([[*c₀,f₀*],[*c₁,f₁*],…,[*c_m,f_m*]]) **confexp**([[*f₁,…,f_n*],[*c₁,…,c_m*]]|sym=*k*)
:: Confluence of characteristic exponents
63. **mcvm**(*n|var=x,z=1,get=g*) **mcvm**([*n₁,n₂,…*]|var=[*a,b,…*],z=1,get=*g*)
mcvm([*r,k,i,j*]|e=1,var=[*a,b,…*])
:: Middle convolution of versal unfolding
64. **anal2sp**(*m,l*)
:: Analyzes simultaneous spectral exponents *m*
65. **mc2grs**(*g,r|top=0,dviout=k,div=ℓ,fig=s*)
:: Transformation of simultaneous spectral exponents of KZ equation of 5 points in \mathbb{P}^1
66. **newKZmat**(*k,l|raw=f,base=1,ext=1*)

67. **midKZ**(*l,b|raw=1,skip=m,kill=f,dviout=1*)
:: diagonalization of residue matrices of KZ equation
68. **mcfamily**(*i,j,[m₁,…],ℓ|mult=1,max=1,fix=[p₁,…],verb=1*)
:: middle convolution of a family of commuting sets
69. **mcset**(*x,k,ℓ*)
:: middle convolution of a set
70. **m2mc**(*ℓ,[a₀,a_y,a₁,c]|swap=1,small=1,MC=1*)
m2mc(*ℓ,s|small=1,int=0,swap=t*)
:: Addition+middle convolution of Pfaffian system

$$du = (A_0 \frac{dx}{x} + A_y \frac{d(x-y)}{x-y} + A_1 \frac{d(x-1)}{x-1} + B_0 \frac{dy}{y} + B_1 \frac{d(y-1)}{y-1})u$$
 with respect to *x*-variable
($\ell = [A_0, A_y, A_1, B_0, B_1]$).
When ℓ is a spectral type or a Riemann scheme, *s*="GRC", "GRSC", "extend", "Pfaff", "sp", "pairs", "irreducible", "All", "swap" in the latter case
71. **mcmgrs**(*g,r|dviout=k*)
:: Transform of simultaneous spectral exponents *g* of a KZ equation of several (≥ 5) points in \mathbb{P}^1
72. **mmc**(*l,[μ,a₁,…,a_n]|full=1,homog=1,mult=f*)
:: Addition and middle convolution of ODE of Schlesinger type and a KZ equation

73. `kzext([a1, a2, ..., am] | perm=σ)`
 :: extend to full KZ residue matrices
74. `mcPfaff(p, v, c | ad=ℓ, verb=k, raw=r, top=1, keep=1)`
 :: Middle convolution of Pfaffian system with singularities in hyperplanes
75. `brPfaff(p, v, b)`
 :: Boundary system of Pfaffian system with respect to a singularities hyperplane
76. `adPfaff(p, v, ℓ | top=-1)`
 :: Addition of Pfaffian system with singularities in hyperplanes
77. `trPfaff(p, v, t)`
 :: Coordinate transformation of Pfaffian system with singularities in hyperplanes
78. `showPfaff(p | raw=1, type=k, div=d, infny=v, ODE=x)`
 :: display Pfaffian system
79. `ssPfaff(p, v | num=1, conv=v1)`
 :: 3-codimensional singularities of arrangement of hyperplanes
80. `arHplane(p, v | num=1)`
 :: singularities of hyperplane arrangement
81. `exarHplane(p, t)`
 :: example hyperplane arrangement
82. `linfrac01(ℓ | over=1)`
 :: List of linear fractional transformations of $x = 0, 1, \infty, y, z, \dots$ ($\ell = [x, y, 0]$ etc. 0 is infinite point)
83. `lft01(ℓ, t | tr=τ)`
 :: Linear fractional transformations of $\ell = [\mathbf{x}, \mathbf{y}]$ or $\ell = [x, y_1, y_2, \dots, y_q]$
- 1.1.3 Some operators
84. `okubo3e([p0,1, ..., p0,m], [p1,1, ..., p1,n], [p2,1, ..., p2,m+n] | opt=1)`
85. `fuchs3e([p0,1, ..., p0,n], [p1,1, ..., p1,n], [p2,1, ..., p2,n])`
86. `ghg([p1,1, p1,2, ..., p1,m], [p2,1, p2,2, ..., p2,n])`
 :: differential operator satisfied by generalized hypergeometric function ${}_mF_n(p_1; p_2; x)$
 (cf. `seriesHG()`)
87. `ghg2([a1, a2, ..., b], [a'1, a'2, ..., b'] | raw=1, all=1, symbol=1, var=v)`
 :: generalized hypergeometric equation of many variables
88. `even4e([p1,1, p1,2, p1,3, p1,4], [p2,1, p2,2])`
 :: Even family of order 4 (Rigid)
89. `odd5e([p1,1, p1,2, p1,3, p1,4, p1,5], [p2,1, p2,2])`
 :: Odd family of order 5 (Rigid)
90. `rigid211([p0,1, p0,2], [p1,1, p1,2], [q0, q1])`
 :: Type 211,211,211
91. `extra6e([p1,1, p1,2, p1,3, p1,4, p1,5, p1,6], [p2,1, p2,2])`
 :: Extra case (Rigid)
92. `eofamily([p0,1, p0,2], [p1,1], [p2,1, ..., p2,n])`
 :: Even/odd family (obsolete)
93. `ev4s(p1, p2, p3, p4, p5)`
 :: Rigid restriction of Heckman-Opdam's hypergeometric equation of type (BC_2, BC_1)
94. `b2e(p1, p2, p3, p4, p5)`
 :: Non-rigid restriction of Heckman-Opdam's hypergeometric equation of type (BC_2, A_1)
95. `heun([a, b, c, d, e], p, r|)`
 :: Heun's equation. r is an accessory parameter

1.2 Useful functions

The following functions are in a module and we call the functions by putting `os_md.` at the head such as `os_md.myhelp()`.

1.2.1 Extended function

96. `myhelp(h)`
:: Displays the manual of `os_muldif.rr`
97. `chkfun(f,s)`
:: Checks whether *f* (= a string) is defined and `load(s)` if it is not
98. `isMs()`
:: Checks whether the operating system is Microsoft Windows
99. `isyes(p|set=l)`
:: Defines a function returning 0 or 1
100. `isall(f,m)`
:: Returns 0 if *m* contains an element satisfying $f(p) = 0$ and 1 otherwise
101. `ptype(p,l)`
:: Returns `type()` regarding *l* as the variable or *l* as the list of variables
102. `getline(Id|Max=m,CR=[r1,r2,...],LF=[l1,l2,...])`
:: An extension of `get_line()`
103. `keyin(s)`
:: Shows *s* and waits a line input from keyboard and returns it
104. `showbyshell(s)`
:: Executes *s* by shell and show the standard output in Risa/Asir
105. `getbyshell(s)`
:: Executes *s* by shell and puts the standard output to a file
106. `fcat(f,s|exe=1)`
:: Outputs *s* in a file *f*
107. `makev([l1,l2,...]|num=1)`
:: Makes a variable combining $\ell_1, \ell_2 \dots$
108. `shortv(p,[v1,v2,...]|top=w)`
:: Changes the variables v_1, \dots with indices contained in *p* into variables with one letter
109. `makenewv(l|var=v,num=n)`
:: Generates a new variable which is not used in *l*
110. `isvar(p)`
:: Is *p* a variable?
111. `varargs(p|all=t)`
:: Returns elementary functions and variables in *p*
112. `pfargs(p,x|level=t)`
:: Returns all functions and variables containing variable *x*
113. `isdif(p)`
:: Returns a list of the pairs of variable and its derivatives
114. `mysubst(r,[v1,r1]|inv=1)` `mysubst(r,[[v1,r1],...]|inv=1)`
`mysubst(r,[l1,l2]|1pair=1,inv=1)`
:: Same as `subst(r,v1,r1,...)`. Useful if *r* is complicated and *r* is a rational form
115. `myswap(p,[x1,x2,...,xn])`
:: Cyclic permutation (x_1, x_2, \dots, x_n) of a (list of) rational form(s)
116. `substnum(l,s,t|depth=d)`
:: Substitution of elements of a list or a vector

117. **mulsubst**($r, [[p_{1,0}, p_{1,1}], [p_{2,0}, p_{2,1}], \dots] | \text{inv}=1)$

mulsubst($r, [\ell_0, \ell_1, \dots] | \text{lpair}=1, \text{generate}=k, \text{short}=1$)

mulsubst($r, [\ell_0, \ell_1] | \text{conj}=f$) **mulsubst**($r, [\ell_0, \ell_1] | \text{dform}=1$)

:: Simultaneous substitutions

118. **fmult**($f, m, \ell, n | \dots$)

:: Returns $m_{length(\ell)}$ by $m_i \mapsto m_{i+1} = f(m_i, \ell[i], n[0], n[1], \dots | \dots)$ ($m_0 = m$)

119. **mtransbys**($f, m, \ell | \dots$)

:: Extends a function $f(x)$ of scalar x to a function of a list, vector or matrix

120. **mmulbys**($f, m, n, \ell | \dots$)

:: Extends a pair of arguments of f to a pair of matrices

121. **cmpsimple**($p, q | \text{comp}=t$)

:: Compares the simplicities of p and q

122. **simplify**($p, \ell, t | \text{var}=[x_1, x_2, \dots]$)

:: Simplifies p by using linear relations indicated by ℓ

123. **getel**(m, i)

:: Returns $m[i]$ if m is a list/vector/matrix and i is non-negative integer

124. **evalred**($r | \text{opt}=[[s_1, t_1], [s_2, t_2], \dots]$)

:: Replaces $\sin(0)$, $\cos(0)$, $\exp(0)$ by 0, 1, 1 etc

1.2.2 Numbers

1.2.3 Polynomials and rational functions

211. **fctrtos**($r | \text{var}=\ell, \text{rev}=1, \text{dic}=1, \text{TeX}=f, \text{dviout}=1, \text{lim}=n, \text{small}=1, \text{pages}=1, \text{add}=s$)

:: Transforms a rational function r to factorized strings

1.2.4 Functions with real/complex variables

1.2.5 Lists and vectors

318. **ldepth**(l)

:: get the maximal depth of a list

319. **refinement2**($m, l | \text{opt}=f$)

:: get all the refinements for two partitions of a positive integer

320. **refinements**($l | \text{opt}=f$)

:: get all the refinements for several partitions of a positive integer

321. **comfamily**(m)

:: get all maximal commuting family of $\{0, 1, \dots, m-1\}$

1.2.6 Matrices

1.2.7 Strings

1.2.8 Permutations

1.2.9 \TeX

407. **show**($p | \text{opt}=\ell, \text{raw}=1$)

:: Displays p by using \TeX in a plausible format

408. **dviout**($p | \text{clear}=1, \text{keep}=1, \text{delete}=t, \text{fctr}=1, \text{mult}=1, \text{subst}=[s_0, s_1], \text{eq}=k, \text{title}=s$)

:: Displays p

409. **dviout0**(ℓ) or **dviout0**($[\ell_1, \ell_2, \dots]$) or **dviout0**($\ell | \text{opt}=s$)

:: Fundamental operations to display equations using \TeX

419. **ltotex**($l | \text{opt}=s, \text{pre}=\text{"string"}, \text{cr}=\text{"cr"}, \text{small}=1, \text{lim}=\ell, \text{var}=v$)

:: Transforms a list to plausible \TeX source which represents GRS or a table or a list etc.

- 1.2.10 Lines and curves
- 1.2.11 Drawing curves and graphs
- 1.2.12 Applications
- 1.2.13 Environments
- 487. **Canvas**
:: Default size of the canvas of **Risa/Asir**
- 488. **AMSTeX**
:: **T_EX** means ***AMSTEX*** if this value equals 1
- 489. **TeXEq**
:: Default display style of **L_AT_EX** (**dviout0(3)** shows it)
- 490. **TeXLim**
:: Maximal width referred to divide a long equations into lines by **L_AT_EX**
- 491. **TeXPages**
:: Threshold value of the numbers of lines for a page in a display style of **T_EX** (cf. **fctrtos()**)
- 492. **TikZ**
:: Flag using **X_Y-pic** or **TikZ** in **T_EX**
- 493. **XYPrec**
:: Number of figures after the decimal point in the expression of coordinates for graphic display
- 494. **XYcm**
:: Unit is cm even in **X_Y-pic**
- 495. **XYLim**
:: Maximal number of coordinates for a line in a source of **X_Y-pic** or **TikZ**
- 496. **DVIOUTH**
:: A program to show explanations of functions indicated by **myhelp()**
- 497. **DIROUT**
:: Directory where the source file of **L_AT_EX** is put (it should be writable)
- 498. **DVIOUTA**
:: Pathname of a program which compiles a source **risaout.tex** of **L_AT_EX** under ***AMSTEX*** and displays it
- 499. **DVIOUTB**
:: Pathname of a program which compiles a source **risaout10.tex** (or **risaout10.tex**) of **L_AT_EX** under ***AMSTEX*** and displays it. We can choose this setting or **DVIOUTA** in **Risa/Asir**
- 500. **DVIOUTL**
Pathname of a program which compiles a source **risaout0.tex** of **L_AT_EX** and displays it
- 501. **.muldif**
:: **os_muldif.rr** reads this file when it starts up
- 502. **risatex.bat**
:: Program compiling the **L_AT_EX** file which **os_muldif.rr** outputs and displaying it on a screen

2 Risa/Asir

Risa/Asir Risa/Asir is an open source general computer algebra system. Kobe distribution is being developed by OpenXM committers. The original Risa/Asir is developed at Fujitsu Labs LTD.

The Kobe distribution works on Windows (32bit, 64bit), UNIX and MAC OS X and can be obtained from

<http://www.math.kobe-u.ac.jp/Asir/asir.html>

2.1 Risa/Asir and os_muldif.rr

We should remark that the calculations of rational functions by **Risa/Asir** may give different results from what we have expected. In particular. they happen for calculations of polynomials or differential operators with coefficient rational functions and matrices whose entries are rational functions. Here we give some examples:

```
[0] 2/x-1/x+1/x-1/x;
(x^3)/(x^4)
[1] x/(x+y)+y/(x+y);
(x^2+2*y*x+y^2)/(x^2+2*y*x+y^2)
[2] x/y*y/x;
(y*x)/(y*x)
[3] 1/(1/x);
(x)/(1)
[4] deg((a/b)*x^2,x);
0
[5] diff((1/a)*x+1/b,x);
(b^2*a)/(b^2*a^2)
[6] diff((x+1)^(-3),x);
(-3*x^2-6*x-3)/(x^6+6*x^5+15*x^4+20*x^3+15*x^2+6*x+1)
[7] A = newmat(2,2,[[a,0],[0,1/a]]);
[ a 0 ]
[ 0 (1)/(a) ]
[8] det(A);
internal error (SEGV)
return to toplevel
[9] coef(x+1/a,1,x);
0
```

The library **os_muldif.rr** [06] was first developped to avoid these inconvenient calculations and it is expected to give more reasonable results.

In this note some explanation of current functions in **os_muldif.rr** is given but it may be tentative and may be changed in future.

- If the command `which("os_muldif.rr")` shows the path to **os_muldif.rr**, **os_muldif.rr** can be loaded.

If the path is not shown, put **os_muldif.rr** in the load path of Risa/Asir (cf. `ctrl("loadpath")`).

It is usually in `./lib/asir-contrib` where `names.rr` etc. exist. It is under `./lib/` where there are libraries of Risa/Asir. Note that the command `which("names.rr")` after stating up Risa/Asir shows the place. Then `os_muldif.rr` is loaded by the command `load("os_muldif.rr")$` and we can use the functions in `os_muldif.rr`.

- Risa/Asir loads `os_muldif.rr` as a module, we should put `os_md.` at the head of the name of a function to call a function.
- If `load("names.rr")` is performed (a package of Risa/Asir may perform this command at the start up), then `os_muldif.rr` can output results by TeX source which enables us to easily read and understand the results.

If there is a path to `dviout` (a previewer of TeX) in Windows, the results can be shown by `dviout`. By a certain setting it is also possible under other environment according to its TeX system and the way to handle it. Namely a DIV file or a PDF file is created by the TeX system and it can be displayed on a screen.

- `chkfun(1,0)` shows Version of Risa/Asir.

Some of the characteristic functions of `os_muldif.rr` are `dviout()`, `show()`, `ltotex()`, `fctrtos()`, `mtotex()`, `myhelp()`, `xy2graph()`, `mtoupper()`, `mdivisor()`, `getbygrs()`, `shiftop()`, `m2mc()`, `mc2grs()`, `scale()` etc.

2.1.1 Install `os_muldif.rr`

- If `os_muldif.rr` exists in the load path of Risa/Asir which is shown by the command `ctrl("loadpath")`, the library `os_muldif.rr` is loaded by the command

```
[0] load("os_muldif.rr")$  
Loaded muldif Ver. 00140330 (Toshio Oshima)
```

and the functions defined by `os_muldif.rr` can be used.

- The function in `os_muldif.rr` is called by putting `os_md.` at the head of the name of the function. In the following `os_md.` is omitted except for examples.
- If a line

```
import("os_muldif.rr")$
```

is added in the file `.asirrc` which exists in the directory indicated by `get_rootdir()`, then `os_muldif.rr` is automatically loaded when Risa/Asir starts up. An example of `.asirrc` is

```
import("contrib-setord.rr")$  
import("gr")$  
import("primdec")$  
import("katsura")$  
import("bfct")$  
import("names.rr")$  
import("oxrfc103.rr")$  
import("os_muldif.rr")$  
end$
```

- We can omit the head `os_md.` for functions which are frequently used by defining new corresponding functions. For example we prepare a file `mydef.rr` written as

```
def cat(X)  
{return os_md.mycat(X|option_list=getopt());}
```

```

def myhelp(X)
{return os_md.myhelp(X|option_list=getopt());}
def show(X)
{return os_md.show(X|option_list=getopt());}
...
cat("mydef:\n cat, myhelp, show,...")$
```

and put it in the loadpath of Risa/Asir and write a line

```
import("mydef.rr")$
```

in `.asirrc`.

- A certain setting is necessary so that `os_muldif.rr` directly shows its results on the display screen using TeX if TeX is installed. The setting depends on the operating system and a command to compile a TeX source file and show a dvi file or PDF file on a display screen. See [risatex.bat](#) and related subjects.
- The function `myhelp("fn")` in `os_muldif.rr` can show the explanation of a given function `fn` in a certain environment. See [DVIOUTH](#) and related explanation. Put `os_muldif.dvi` and `os_muldif.pdf` in `get_rootdir()/help`. Then if `dviout` works under Microsoft Windows, the setting of [DVIOUTH](#) may not be necessary.

3 Functions

3.1 Functions related to differential operators

The following functions are in a module and we call the functions by putting `os_md.` at the head such as `os_md.muldo()`.

3.1.1 Fundamental functions

1. `muldo(p1, p2, [x, ∂x] | lim=n)` or `muldo(p1, p2, x | lim=n)`
`muldo(p1, p2, [[x1, ∂x1], [x2, ∂x2], ...] | lim=n)` or `muldo(p1, p2, [[x1], x2, ...] | lim=n)`
:: Returns the product of ordinary (partial) differential operators whose coefficients are rational functions (or elementary functions) ($\Leftarrow [\partial_x, x] = 1$)

- Rational functions are quotients of polynomials with coefficients in rational numbers (or complex numbers whose real and imaginary parts are rational numbers (cf. [Type of numbers](#))).
- If ∂_x is standard dx , $[x, \partial_x]$ may be x in short.
This is same for other following functions.
- If p is a partial differential operators, the third parameter can be $[[x], [y, v], z]$ for example.
This is understood $[[x, dx], [y, v], [z, dz]]$ adding d but the first element of the list should ne a list. Namely $[[x, dx], [y, dy]]$ can be $[[x], y]$ but $[x, y]$ is understood p as an ordinary differential operator.
Other following function the similar short expressions are allowed.
- p_2 can be a vector of a matrix and in this case p_1 may be a matrix.
- If x and x_i are 0, then the product is a usual product.
- Differential operators of infinite order such as $\exp(\partial)$ or ∂^{-1} are allowed. (But they are not allowed for `appldo()` etc. If the calculation is not finite, then the calculation will be ignored after a finite terms).
- Using the Leibniz formula, the order of differentiations are calculated up to 100 by default bue the number 100 is changed by the option parameter `lim=n`, which is only possible when p_1 and p_2 are scalars.

For example, `muldo(dx^(-1), 1/x, x)` and `muldo(exp(dx), 1/x, x)` have infinite terms.

Examples with $[dx, x] = 1$, $[dy, y] = 1$ are as follows ($\Leftarrow dx = \frac{\partial}{\partial x}$, $dy = \frac{\partial}{\partial y}$)

```
[0] os_md.muldo((1+x)*dx+1, (1-x)*dx+1, [x,dx]);
(-x^2+1)*dx^2+(-x+1)*dx+1
[1] os_md.muldo(x*dx+1/(x-a),a*dx+1/x,x);
((a*x^3-a^2*x^2)*dx^2+x^2*dx-x+a+1)/(x^2-a*x)
[2] os_md.muldo((a+y)*dy, (b-y)*dy, y);
(-y^2+(-a+b)*y+b*a)*dy^2+(-y-a)*dy
[3] os_md.muldo((a+y)*dy, (b-y)*dy, [0,dy]);
(-y^2+(-a+b)*y+b*a)*dy^2
[4] os_md.muldo(dx+dy, x*dx+y*dy, [[x],y]);
x*dx^2+((x+y)*dy+1)*dx+y*dy^2+dy
[5] os_md.muldo(dx+dy,sin(x+y),[[x],y]);
sin(x+y)*dy+sin(x+y)*dx+2*cos(x+y)
[6] os_md.muldo(exp(dx),(x-1)^4,x);
exp(dx)*x^4
[7] subst(@@,exp(dx),1);
```

```

x^4
[8] os_md.muldo(x*dx^(-1),dx/x,x);
Over 100 derivations!
(x^100*dx^{\{100\}}+x^99*dx^99+2*x^98*dx^98+.....)/(x^100*dx^100)
[9] os_md.muldo(dx^(-1),dx/x,x|lim=5);
Over 5 derivations!
(x^5*dx^5+x^4*dx^4+2*x^3*dx^3+6*x^2*dx^2+24*x*dx+120)/(x^5*dx^5)
[10] os_md.muldo(x*exp(dx),1/x,x|lim=5);
Over 5 derivations!
(exp(dx)*x^5-exp(dx)*x^4+exp(dx)*x^3-exp(dx)*x^2+exp(dx)*x-exp(dx))/(x^5)
[11] deval(os_md.muldo(exp(dx),exp(x),x));
Over 100 derivations!
2.71828*exp(1*dx)*exp(1*x)

```

[0] means

$$\left((1+x)\frac{d}{dx} + 1\right) \circ \left((1-x)\frac{d}{dx} + 1\right) = (1-x^2)\frac{d^2}{dx^2} + (1-x)\frac{d}{dx} + 1$$

In [6], [8], [9], [10], [11] the results are understood by arranging them in sums of products or quotients of functions and differentials as in the usual expression. Namely

[6] means

$$e^{\frac{d}{dx}} \circ \frac{1}{(x-1)^4} = x^4 e^{\frac{d}{dx}} = x^4 \left(1 + \frac{d}{dx} + \frac{1}{2} \frac{d^2}{dx^2} + \frac{1}{3!} \frac{d^3}{dx^3} + \dots\right)$$

and [8] means

$$x\left(\frac{d}{dx}\right)^{-1} \circ \frac{1}{x} \frac{d}{dx} = 1 + \frac{1}{x} \left(\frac{d}{dx}\right)^{-1} + \frac{2}{x^2} \left(\frac{d}{dx}\right)^{-2} + \dots$$

and [10] means

$$x e^{\frac{d}{dx}} \circ \frac{1}{x} = \left(1 - \frac{1}{x} + \frac{1}{x^2} - \frac{1}{x^3} + \frac{1}{x^4} - \frac{1}{x^5}\right) \left(1 + \frac{d}{dx} + \frac{1}{2!} \frac{d^2}{dx^2} + \frac{1}{3!} \frac{d^3}{dx^3} + \dots\right)$$

[11] corresponds to

$$e^{\frac{d}{dx}} \circ e^x = e^{x+1} e^{\frac{d}{dx}}$$

2. `caldo([p1, p2, ...], [x, ∂x] | mono=f)` or `caldo([p1, p2, ...], [[x1, ∂x1], ...] | mono=f)`

:: Returns the sum of products of differential operators

Returns $p_1 + p_2 + \dots$ if p_j are (partial) differential operators.

If p_j are a list $[p_{j,1}, \dots]$ of differential operators, then

- $p_j = p_{j,1}p_{j,2} \dots$ are products of differential operators.
- Moreover if $p_{j,ν}$ is $[q_{j,ν}, m_{j,ν}]$, $p_{j,ν} = q_{j,ν}^{m_{j,ν}}$. Here $m_{j,ν}$ should be non-negative integer.
- If $p_{j,ν}$ is $[q_{j,ν}, [m_{j,ν,1}, \dots]]$, $p_{j,ν} = (q_{j,ν} + s_{j,ν,1})(q_{j,ν} + s_{j,ν,2}) \dots$.

[0] `os_md.caldo([[dx-x, [dx+x, 2]], y], x);`

$dx^3+x*dx^2+(-x^2+3)*dx-x^3+x+y$

3. `muledo(p1, p2, [x, ∂x])` or `muledo(p1, p2, x)`

:: Returns the product of differential operators of Euler type ($\Leftarrow [\partial_x, x] = x$)

p_2 can be a matrix of vector and in this case p_1 can be a matrix.

$[dx, x] = x \Leftarrow dx = x \frac{d}{dx}$.

[0] `os_md.muledo((1+x)*dx+1, (1-x)*dx+1, x);`

$(-x^2+1)*dx^2+(-x+1)*dx+1$

4. **transpdo**(p , $[[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$, $[[y_1, \partial_{y_1}], [y_2, \partial_{y_2}], \dots]$ | $\text{ex}=1$, $\text{inv}=f$)
:: Transformation of differential operator p by $x_i \mapsto y_i = y_i(x)$, $\partial_{x_j} \mapsto \partial_{y_j} = c_j(x) + \sum_\nu a_{j\nu}(x)\partial_{x_\nu}$
- y_i , ∂_{y_j} are rational functions and differential operators
 - $[x_i, \partial_{x_i}]$ may be written by x_i ($\Leftarrow \partial_{x_i} = \text{dx}_i$).
 - If length of the 3-rd list is shorter than the length of the 2-nd list, then the identity maps are added to the last of the 2-nd list.
 - p can be a list or vector or matrix of differential operators.
 - If the transformation corresponds to a birational transformation of coordinates, then the second list can be the list $[y_1, y_2, \dots]$ with the same length as the first list. $\partial_{y_1}, \partial_{y_2}, \dots$ are calculated.
 - **inv=1** : Returns an inverse transformation
 - **inv=2** : Returns $[\partial_{y_1}, \partial_{y_2}, \dots]$.
 - **inv=3** : Returns $[\partial_{y_1}, \partial_{y_2}, \dots]$ corresponding to the inverse transformation.
 - If the 3-rd parameter of this function is an invertible matrix $m = (m_{i,j})$ of integers or the corresponding list of lists, then the transformation is defined by the coordinate transformation **transppow()**:

$$x_i \mapsto \prod_{j=1}^m x_j^{m_{i,j}}.$$

```
[0] os_md.transpdo(x^2*dx^2,x,[[1/x,-x^2*dx]]);  
x^2*dx^2+2*x*dx  
[1] os_md.transpdo(x*dx+y*dy,[[x],y],[x+y,x-y]);  
os_md.transpdo(x*dx+y*dy,[[x],y],[[x+y,(dx+dy)/2],[x-y,(dx-dy)/2]]);  
y*dy+x*dx  
[2] os_md.transpdo(4*dx^2,[[x,dx],[y,dy]], [x+y,x-y]);  
dy^2+2*dx*dy+dx^2  
[3] os_md.transpdo(x*dx+y*dy,[[x],y],[x+y,x-y]|inv=2);  
[1/2*dy+1/2*dx,-1/2*dy+1/2*dx]  
[4] os_md.transpdo(x*dx,x,[1/x]);  
-x*dx  
[5] os_md.transpdo(x*dx,x,[-dx+1/x,x]|ex=1);  
-x*dx
```

- In [0], [1] abbreviated form of $[[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$ is used (cf. **muldo()**).
- In [0] and [1] the coordinate transformation $x \mapsto \frac{1}{x}$ and $(x, y) \mapsto (x+y, x-y)$ are considered. In these cases the transformations $\frac{d}{dx} \mapsto -\frac{1}{x^2} \frac{d}{dx}$ and $(\frac{\partial}{\partial x}, \frac{\partial}{\partial y}) \mapsto (\frac{1}{2} \frac{\partial}{\partial x} + \frac{1}{2} \frac{\partial}{\partial y}, \frac{1}{2} \frac{\partial}{\partial x} - \frac{1}{2} \frac{\partial}{\partial y})$ are indicated but we may shortly indicate them as in [2].
- We may indicated the transformation which induces an isomorphism of the ring of differential operators such as $(x, \frac{d}{dx}) \mapsto (x, \frac{d}{dx} + c)$.
- **ex=1** : Returns a transformation of p defined by $(x_i, \partial_{x_i}) \mapsto (S_i(x, \partial), T_i(x, \partial))$ which induces an isomorphism of the ring of differential operators. Here $[T_i(x, \partial), S_j(x, \partial)] = \delta_{i,j}$ and p is a polynomial of (x, ∂) .

[5] considers a transformation defined by $(x, \frac{d}{dx}) \mapsto (-\frac{d}{dx} + \frac{1}{x}, x)$.

5. **translpdo**(p , $[[x_1, \partial_{x_1}], [x_2, \partial_{x_2}], \dots]$, mat)

:: Transforms a differential operator p by the coordinate transformation $x_i \mapsto \sum_j (\text{mat})_{ij} x_j$
 $[x_i, \partial_{x_i}]$ may be an abbreviated form x_i ($\Leftarrow \partial_{x_i} = \text{dx}_i$).

```
[0] M=mat([1,1],[1,-1]);  
[ 1 1 ]
```

```

[ 1 -1 ]
[1] os_md.translpdo(4*dx^2, [[x,dx],[y,dy]],M);
dy^2+2*dx*dy+dx^2

6. transppow([[x1,∂x1],..., [xn,∂xn]],m)
:: Coordinate transformations by products of powers of coordinates
Returns the transformation of [[x1,∂x1],..., [xn,∂xn]] byr the map

$$x_i \mapsto \prod_{j=1}^n x_j^{m_{i,j}} \quad (j = 1, \dots, n)$$

[0] os_md.transppow([x,y],[[1,1],[0,-1]]);
[[x,(y*dy+x*dx)/(x)],[x/(y),(-y^2*dy)/(x)]]
[1] os_md.transppow([x,y],[[1,1],[0,1]]);
[[x,(-y*dy+x*dx)/(x)],[y*x,(dy)/(x)]]

7. appldo(p,r,[x,∂x] | Pfaff=1) or appldo(p,r,[[x1,∂x1],[x2,∂x2],...])
:: Applies a (matrix of) differential operator to a (matrix of) rational function or elementary
function or a Pfaffian system
r can be a vector or a matrix. In this case p can be a matrix.
• Pfaff=1 : For  $\frac{du}{dx} = r(x)u$ , s(x) satisfying  $p(x, \frac{du}{dx})u = s(x)u$  is returned (p, r is a matrix or a
scalar).
[0] os_md.appldo(x*dx^2-2*dx, a*x^3+b*x^2, x);
-2*b*x
[1] os_md.appldo(x*dx^2+2*dx, x+y/x, x);
2
[2] V=newvect(2,[x/y,y/x]);
[(x)/(y) (y)/(x)]
[3] os_md.appldo(x*dx+1,V,x);
[(2*x)/(y) 0]
[4] P=newmat(2,2,[[x*dx+1,x/y],[0,x*dx]]);
[x*dx+1 (x)/(y)]
[0 x*dx]
[5] os_md.appldo(P,V,x);
[(2*x+y)/(y) (-y)/(x)]
[6] os_md.appldo(ddx,P,dx);
[x 0]
[0 x]
[7] A=newmat(2,2,[[cos(x+y),-sin(x+y)],[sin(x+y),cos(x+y)]]);
[cos(x+y) -sin(x+y)]
[sin(x+y) cos(x+y)]
[8] os_md.appldo(dx^2,A,x);
[-cos(x+y) sin(x+y)]
[-sin(x+y) -cos(x+y)]
[9] V=[lambda1,lambda2];C0=newmat(2,2,[V,V]);
[10] C=os_md.diagm(2,[1/x,1/(x-1)])*(C0+os_md.diagm(2,[mu]));
[11] P=os_md.diagm(2,[1,dx])*C0;

```

```
[12] U=os_md.appldo(P,C,[x,dx]|Pfaff=1);
[13] V=os_md.myinv(U);
```

In the above we have the matrices U and V of rational functions which satisfies $u = Uv$ and $v = Vu$ for $u_0 = \partial^{-\mu} x^{\lambda_1} (1-x)^{\lambda_2}$ (Gauss hypergeometric function), $v = \partial^{-\mu-1} \begin{pmatrix} x^{\lambda_1-1} (1-x)^{\lambda_2} \\ x^{\lambda_1} (1-x)^{\lambda_2-1} \end{pmatrix}$.

8. `adj(p,[x,∂x])` or `adj(p,[[x1,∂x1],[x2,∂x2],...])`
:: Returns the formal adjoint of a (matrix of) differential operator p

```
[0] os_md.adj(x*dx^2+x^3*dx+1,x);
x*dx^2+(-x^3+2)*dx-3*x^2+1
```

9. `psymbol(p,[[x1,∂x1],[x2,∂x2],...])`
:: principal symbol of differential operator
微分作用素 p の主表象を返す (cf. [ghg2\(\)](#)).
10. `sftpexp(p,[x,∂x],q,r)` or `sftpexp(p,[[x1,∂x1],...],q,r)`
:: Returns $q^{-r} \circ p \circ q^r$

Here q and r are rational function and r is a parameter.

```
[0] os_md.sftpexp(dx*dy,[[x,dx],[y,dy]],exp(x-y),a);
(dx+a)*dy-a*dx-a^2
[1] os_md.sftpexp(dx*dy,[[x,dx],[y,dy]],x-y,a);
((x^2-2*y*x+y^2)*dx+a*x-a*y)*dy+(-a*x+a*y)*dx-a^2+a
[2] os_md.show(@@);
(x - y)^2 ∂x ∂y - a(x - y) ∂x + a(x - y) ∂y - a(a - 1)
```

11. `appledo(p,r,[x,∂x])`
:: Applies a differential operator of Euler type to a rational function

```
[0] os_md.appledo(dx^2,x^2+y/x,x);
(4*x^3+y)/(x)
```

12. `divdo(p1,p2,[x,∂x]|rev=1)`
:: Calculates divisions of ordinary differential operators
• Returns $[q, r, m]$
 $\Rightarrow m * p_1 = q * p_2 + r$ (ord $m = 0$, ord $r <$ ord p_2)
• If `rev=1` is indicated
 $p_1 * m = p_2 * q + r$ (ord $m = 0$, ord $r <$ ord p_2)

```
[0] R=os_md.divdo(dx^2, x*dx+1, x);
[x*dx-2, x^2]
[1] os_md.muldo(R[0],x*dx+1,x)+R[1];
x^2*dx^2
[2] R=os_md.divdo(dx^2,x*dx+1,x|rev=1);
[x*dx+2,0,x^2]
[3] os_md.muldo(x*dx+1,R[0],x)+R[1];
x^2*dx^2+4*x*dx+2
[4] os_md.muldo(dx^2,R[2],x);
x^2*dx^2+4*x*dx+2
```

13. `mygcd(p1,p2,[x,∂x]|rev=1,dviout=n)` or `mygcd(p1,p2,[x]|rev=1,dviout=n)`

`mygcd(p1, p2, x|dviout=n), mygcd(p1, p2, 0|dviout=n)`
:: GCD of ordinary differential operators (or polynomials of x or positive integers) p_1 and p_2

- Let R be the result of the function. Then GCD equals $R[0] = R[1] * p_1 + R[2] * p_2$.
 $R[3] * p_1 + R[4] * p_2 = 0$ is valid and the matrix $\begin{pmatrix} R[1] & R[2] \\ R[3] & R[4] \end{pmatrix}$ is invertible.
Moreover $R[3] * p_1 = -R[4] * p_2$ is LCM of p_1 and p_2 ,
- `rev=1` : The order of the products are inverted in the above.
- The calculation uses euclidean algorithm algorithm. If the size of p_1 and p_2 are same, p_1 is first divided by p_2 .
- `dviout=0` : All steps in the euclidean algorithm returned as a list of lists.
In the case of integers, each list consists of pair of integers and the pair of quotient and remainder. The first list contains $[p_1, p_2]$.
In the case of polynomials or differential operators, each list consists of a pair of polynomials or differential operators, a pairs of quotient and remainder and a scalar to be multiplied (the list returned by `divdo()`).
- `dviout=1` : the euclidean algorithm is displayed using TeX.
- `dviout=2` : the euclidean algorithm is displayed using matrices and TeX.
- `dviout=-1,-2` : returns the TeX source of the above.

```
[0] P = os_md.muldo(x*dx+1,x*dx+1,x);
x^2*dx^2+3*x*dx+1
[1] Q = os_md.muldo(dx-1,x*dx+1,x);
x*dx^2+(-x+2)*dx-1
[2] os_md.mygcd(P,Q,[x]);
[x*dx+1,(1)/(x+1),(-x)/(x+1),((-x-1)*dx+x+2)/(x+1),((x^2+x)*dx+x+2)/(x+1)]
[3] os_md.mygcd(P,Q,[dx]);
[1,0,(1)/(x*dx^2+(-x+2)*dx-1),1,(-x^2*dx^2-3*x*dx-1)/(x*dx^2+(-x+2)*dx-1)]
[4] os_md.mygcd(234,111,0);
[3,-9,19,37,-78]
[5] os_md.mygcd(234,111,0|dviout=0);
[[234,111],[2,12],[9,3],[4,0]]
[6] os_md.mygcd(234,111,0|dviout=1);
```

$$234 = 2 \times 111 + 12$$

$$111 = 9 \times 12 + 3$$

$$12 = 4 \times 3$$

```
[7] os_md.mygcd(234,111,0|dviout=-1);
234&=2\times 111+12\allowdisplaybreaks\\
111&=9\times 12+3\allowdisplaybreaks\\
12&=4\times 3
[8] os_md.mygcd(234,111,0|dviout=2)$
```

$$\begin{aligned} \begin{pmatrix} 234 \\ 111 \end{pmatrix} &= \begin{pmatrix} 2 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 111 \\ 12 \end{pmatrix} \\ &= \begin{pmatrix} 2 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 9 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 12 \\ 3 \end{pmatrix} = \begin{pmatrix} 19 & 2 \\ 9 & 1 \end{pmatrix} \begin{pmatrix} 12 \\ 3 \end{pmatrix} \end{aligned}$$

$$= \begin{pmatrix} 19 & 2 \\ 9 & 1 \end{pmatrix} \begin{pmatrix} 4 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 3 \\ 0 \end{pmatrix} = \begin{pmatrix} 78 & 19 \\ 37 & 9 \end{pmatrix} \begin{pmatrix} 3 \\ 0 \end{pmatrix},$$

$$\begin{pmatrix} 3 \\ 0 \end{pmatrix} = \begin{pmatrix} -9 & 19 \\ 37 & -78 \end{pmatrix} \begin{pmatrix} 234 \\ 111 \end{pmatrix}$$

[9] `os_md.mygcd(P,Q,[x,dx]|dviout=2)$`

$$x^2\partial^2 + 3x\partial + 1 = (x)(x\partial^2 - (x-2)\partial - 1) + (x(x+1)\partial + (x+1))$$

$$(x^2 + 2x + 1)(x\partial^2 - (x-2)\partial - 1) = ((x+1)\partial - (x+2))(x(x+1)\partial + (x+1))$$

[10] `os_md.mygcd(P,Q,[x,dx]|dviout=2);`

$$\begin{pmatrix} x^2\partial^2 + 3x\partial + 1 \\ x\partial^2 - (x-2)\partial - 1 \end{pmatrix} = \begin{pmatrix} x & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} x\partial^2 - (x-2)\partial - 1 \\ x(x+1)\partial + (x+1) \end{pmatrix}$$

$$= \begin{pmatrix} x & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} \frac{1}{x+1}\partial - \frac{x+2}{(x+1)^2} & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} x(x+1)\partial + (x+1) \\ 0 \end{pmatrix}$$

$$= \begin{pmatrix} \frac{x}{x+1}\partial + \frac{1}{(x+1)^2} & x \\ \frac{1}{x+1}\partial - \frac{x+2}{(x+1)^2} & 1 \end{pmatrix} \begin{pmatrix} x(x+1)\partial + (x+1) \\ 0 \end{pmatrix}$$

$$= \begin{pmatrix} x\partial + 1 & x \\ \partial - 1 & 1 \end{pmatrix} \begin{pmatrix} x\partial + 1 \\ 0 \end{pmatrix},$$

$$\begin{pmatrix} x\partial + 1 \\ 0 \end{pmatrix} = \begin{pmatrix} \frac{1}{(x+1)^2} & -\frac{x}{(x+1)^2} \\ -\frac{1}{x+1}\partial + \frac{x+2}{(x+1)^2} & \frac{x}{x+1}\partial + \frac{x+2}{(x+1)^2} \end{pmatrix} \begin{pmatrix} x^2\partial^2 + 3x\partial + 1 \\ x\partial^2 - (x-2)\partial - 1 \end{pmatrix}$$

14. `mylcm(p1,p2,[x,∂x]|rev=1)` or `mylcm(p1,p2,[x]|rev=1)`
`mylcm(p1,p2,x)`, `mylcm(p1,p2,0)`
:: LCM of ordinary differential operators (or polynomials of x or positive integers) p_1 and p_2

```
[0] P=os_md.mylcm((2-x)*dx-1,x*dx+1,[x,dx]);
(x^2-2*x)*dx^2+(4*x-4)*dx+2
[1] os_md.appldo(P,a/x+b/(2-x),[x,dx]);
0
[2] Q=os_md.mylcm((2-x)*dx-1,x*dx+1,x);
(x^2-2*x)*dx^2+(2*x-2)*dx+1
[3] fctr(Q);
[[1,1],[x*dx+1,1],[(x-2)*dx+1,1]]
```

15. `m1div(m,n,[x,∂x])` or `m1div(m,n,[x])` or `m1div(m,n,x)`
:: Returns $R = [R[0], R[1]]$ such that $m = R[1](\partial_x - n) + R[0]$ (or $m = R[1](x - n) + R[0]$) for a square matrix m of differential operators with coefficients in rational functions (or polynomials of x).

Here $R[0]$ does not contain differentiation (ro x).

16. `qdo(p1,p2,[x,∂x])`
:: Returns the list $[q_1, q_2]$ of differential operators satisfying $q_1 p_2 u = 0$ and $q_2 p_2 u = u$ for a differential equation $p_1 u = 0$

The differential operators q_1 and q_2 satisfy the following.

$$qp_2 u = 0 \Rightarrow \exists r \text{ such that } q = rq_1$$

$$qp_2 u = u \Rightarrow \exists r \text{ such that } q = q_2 + rq_1 \text{ and } \text{ord } q_2 \leq \text{ord } q$$

[0] `P=os_md.ghg([a,b],[c]);`

```

(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-b*a
[1] os_md.qdo(P,dx,x);
[(x^2-x)*dx^2+((a+b+3)*x-c-1)*dx+(b+1)*a+b+1,((-x^2+x)*dx+(-a-b-1)*x+c)/(b*a)]

```

17. `mdivisor(m, [x, ∂] | trans=1, step=1, dviout=t)`
`mdivisor(m, x | trans=1, step=1, dviout=t), mdivisor(m, 0 | trans=1, step=1, dviout=t)`
:: Elementary divisors of a matrix of ordinary differential operators/polynomials with coefficients in rational functions/integers

- The algorithm in the case of a matrix of ordinary differential operators is given by [O3, Lemma 1.10].
- `step=1` : Gives intermediate process with fundamental transformations for lines and columns
- `trans=1` : Returns a list of the elementary divisors, the matrix for a transformation of lines acting from the left, that of columns acting from the right.
- `trans=2` : Returns the list with the above 3 elements + the inverse of the matrix transforming lines + the inverse of the matrix transforming columns
- m is invertible \Leftrightarrow the elementary divisors are $[1, 1, \dots]$. In this case $R[1]$ is the inverse. Here R is returned with the option `trans=1` and $R[2]$ is the identity matrix.
- `dviout=1` : Displays the intermediate steps by using \TeX で表示.
- `dviout=-1` : Returns the above \TeX source.
- `dviout=2` : Displays the intermediate steps and the matrices defining the transformations
- `dviout=-2` : Returns the above \TeX source.
- `dviout=3` : Returns the result of elementary transformations and the matrices defining the transformations and their inverses (corresponding to `trans=2`).
- `dviout=-3` : Returns the above \TeX source.
- `unim()` gives problems for exercises of calculations of elementary divisors and diagonalizations of matrices.

```

[0] A=os_md.s2m("12-1,2-22,-121");
[ 1 2 -1 ]
[ 2 -2 2 ]
[ -1 2 1 ]
[1] os_md.mdivisor(os_md.mgen(3,0,[x],0)-A,x);
[1,x-2,x^2+2*x-8]
[2] os_md.mdivisor(os_md.mgen(3,0,[x],0)-A,x|step=1);
1: start
[ x-1 -2 1 ]
[ -2 x+2 -2 ]
[ 1 -2 x-1 ]
1: (1,2) -> (1,1)
[ -2 x-1 1 ]
[ x+2 -2 -2 ]
[ -2 1 x-1 ]
1: unit
[ 1 -1/2*x+1/2 -1/2 ]
[ 0 1/2*x^2+1/2*x-3 1/2*x-1 ]
[ 0 -x+2 x-2 ]
2: start

```

```

[ 1/2*x^2+1/2*x-3 1/2*x-1 ]
[ -x+2 x-2 ]
2: (1,2) -> (1,1)
[ 1/2*x-1 1/2*x^2+1/2*x-3 ]
[ x-2 -x+2 ]
[ 2 0 ]*
[ -4 2 ]
2: line 1 & 2
[ x-2 x^2+x-6 ]
[ 0 -2*x^2-4*x+16 ]
*[ 1 -x-3 ]
[ 0 1 ]
2: column 1 & 2
[ x-2 0 ]
[ 0 -2*x^2-4*x+16 ]
3: start
[ -2*x-8 ]
[1,x-2,x^2+2*x-8]
[3] os_md.mdivisor(os_md.mgen(2,0,[dx],0),[x,dx]|step=1);
1: start
[ dx 0 ]
[ 0 dx ]
1: column 1 += col2*x
[ dx 0 ]
[ x*dx+1 dx ]
[ -x 1 ]*
[ x*dx+2 -dx ]
1: line 1 & 2
[ 1 dx ]
[ 0 -dx^2 ]
1: unit
[ 1 dx ]
[ 0 -dx^2 ]
2: start
[ -dx^2 ]
[[1,dx^2],
[4] os_md.mdivisor(os_md.mgen(2,0,[dx],0),[x,dx]|trans=2);
[[1,dx^2],[ -x 1 ]
[ -x*dx-2 dx ],[ 1 -dx ]
[ x -x*dx+1 ],[ dx -1 ]
[ x*dx+1 -x ],[ -x*dx dx ]
[ -x 1 ]]
[5] os_md.mdivisor(os_md.mgen(2,0,[dx],0),[x,dx]|dviout=2);

```

$$\begin{aligned}
& \begin{pmatrix} \partial & 0 & 1 & 0 \\ 0 & \partial & 0 & 1 \\ 1 & 0 & & \\ 0 & 1 & & \end{pmatrix} \\
& C1 += C2 \times (x) \\
& \rightarrow \begin{pmatrix} \partial & 0 & 1 & 0 \\ x\partial + 1 & \partial & 0 & 1 \\ 1 & 0 & & \\ x & 1 & & \end{pmatrix} \\
& \begin{pmatrix} -x & 1 \\ x\partial + 2 & -\partial \end{pmatrix} \begin{pmatrix} L1 \\ L2 \end{pmatrix} \\
& \rightarrow \begin{pmatrix} 1 & \partial & -x & 1 \\ 0 & -\partial^2 & x\partial + 2 & -\partial \\ 1 & 0 & & \\ x & 1 & & \end{pmatrix} \\
& Cj -= C1 \times \circ \quad (j > 1) \\
& \rightarrow \begin{pmatrix} 1 & 0 & -x & 1 \\ 0 & -\partial^2 & x\partial + 2 & -\partial \\ 1 & -\partial & & \\ x & -x\partial + 1 & & \end{pmatrix} \\
& L2 \leftarrow (-1) \times L2 \\
& \rightarrow \begin{pmatrix} 1 & 0 & -x & 1 \\ 0 & \partial^2 & -x\partial - 2 & \partial \\ 1 & -\partial & & \\ x & -x\partial + 1 & & \end{pmatrix}
\end{aligned}$$

As a result,

$$\begin{aligned}
& \begin{pmatrix} 1 & 0 \\ 0 & \partial^2 \end{pmatrix} = \begin{pmatrix} -x & 1 \\ -x\partial - 2 & \partial \end{pmatrix} \begin{pmatrix} \partial & 0 \\ 0 & \partial \end{pmatrix} \begin{pmatrix} 1 & -\partial \\ x & -x\partial + 1 \end{pmatrix}, \\
& \begin{pmatrix} -x & 1 \\ -x\partial - 2 & \partial \end{pmatrix}^{-1} = \begin{pmatrix} \partial & -1 \\ x\partial + 1 & -x \end{pmatrix}, \\
& \begin{pmatrix} 1 & -\partial \\ x & -x\partial + 1 \end{pmatrix}^{-1} = \begin{pmatrix} -x\partial & \partial \\ -x & 1 \end{pmatrix}.
\end{aligned}$$

The matrices defining the transformations are obtained by `mygcd()`.

The elements of the matrix m belong one of the following Euclidean rings Q .

- (1) The ring of integers
- (2) The polynomial ring of one variable whose coefficients are rational functions/numbers
- (3) The ring of ordinary differential operators whose coefficients are rational functions

We use the following algorithm.

- (a) If $A = (A_{i,j})$ is a zero matrix, we return [0].
- (b) We move the non-zero minimal (i, j) element of A to the $(1, 1)$ element by permutations of lines and columns of A ((i, j) is chosen to be minimal by the lexicographic order). Here “minimal” means with respect to absolute value in (1) or degree in (2) or rank in (3).
- (c) If there exists a non-zero element $A_{i,1}$ with $i > 1$, we get $C \in GL(2, S)$ such that the second element of $C(A_{i,1})$ vanishes (the second element of Cv vanishes (\leftarrow euclidean algorithm)). Here we can choose C so that the coefficients of elements of the matrix are polynomials in the cases (2) and (3). Then we apply C to the first and the i -th line of A and go to (b).
- (d) If $A_{i,1} = 0$ for $i > 1$ and there exists a non-zero $A_{1,j}$ with $j > 1$, we get $C \in GL(2, S)$ such that the second element of $(A_{1,1}, A_{1,j})C$ vanishes. Then we apply C to the first column and the j -th column of A and go to (b).

- Hereafter we assume $A_{1,1} \neq 0$ and $A_{i,1} = A_{1,j} = 0$ for $i > 1$ and $j > 1$.
- (e) If the number of lines of A or the number of columns of A is 1, we return $[A_{1,1}]$.
- Otherwise —
- (f) If $A_{1,1}$ is invertible, we replace $A_{1,1}$ by 1 and go to (g) ii).
- In the case (1) or (2) —
- (g) We check the existence of the element $A_{i,j}$ which is not divided by $A_{1,1}$.
 - i) If the above element $A_{i,j}$ exists, we add the j -th column to the first column. Then if $i \neq 2$, we swap 2-nd line and the i -th line. Then go to (b).
 - ii) If all the elements of A can be divided by $A_{1,1}$, we denote the matrix excluding the 1-st line and 1-st column of A by A' and call this function replacing A by $A_{1,1}^{-1}A'$. If we get $[R'_1, R'_2, \dots]$ by this call, we return $[A_{1,1}R'_A, A_{1,1}R'_2, \dots, A_{1,1}]$.
- In the case (3) —
- (h) We choose a nonzero $A_{i,j}$ with $i > 1$ and $j > 1$ (the minimal (i, j) in the lexicographic order). We moreover choose a non-negative integer k such that $SA_{i,j}x^k + SA_{1,1} \not\subset SA_{1,1}$. Here we note that $0 \leq k <$ the rank of $A_{1,1}$. Then we change $A_{\nu,1}$ by $A_{\nu,1} + A_{\nu,j}x^k$ for $\nu = 1, 2, \dots$ and go to (b).

step=1 : the meaning of the comment displayed above a matrix is as follows.

- The first number id the depth of the nesting of called **mdivisor()**. If the depth increases by 1, the size of the matrices decreases by 1 (cf. (f), (g) ii)).
- **start** : The original matrix when this function is called.
- **(a,b) -> (1,1)** : Swaps the a -th line and the first line and moreover the b -column and the first column and moves the (a,b) element to the $(1,1)$ element (cf. (b)).
- **line 1 & a** : Multiplies the first line and the a -th line by a matrix in $GL(2, S)$ from the left and changes the $(a,1)$ element to 0. (cf. (c)).
- **column 1 & b** : Multiplies the first column and the b -th column by a matrix in $GL(2, S)$ from the right and changes the $(1,b)$ element to 0. (cf. (d)).
- **unit : (1,1)** : The $(1,1)$ element is invertible (cf. (f)).
- **column 1 += col b, line 2<->a** : Adds the b -th column to the first column and swaps 2-nd line and the a -th line (cf. (g) i)).
- **column 1 += col b*x^k** : Adds the column obtained by multiplying the b -column by x^k from the right to the first column (cf. (h)).

In TeX L_i represents the i -th line and C_j represents the j -th column. For example,

$$\begin{pmatrix} 1 & 2 \\ 3 & 4 \end{pmatrix} \begin{pmatrix} L3 \\ L5 \end{pmatrix}$$

means that the 3-rd line and the 5-th line are multiplied by $\begin{pmatrix} 1 & 2 \\ 3 & 4 \end{pmatrix}$ from the left.

[6] os_md.mdivisor(mat([3,5,7],[5,3,3]),0|dviout=2)

$$\begin{pmatrix} 3 & 5 & 7 & 1 & 0 \\ 5 & 3 & 3 & 0 & 1 \\ 1 & 0 & 0 & & \\ 0 & 1 & 0 & & \\ 0 & 0 & 1 & & \end{pmatrix}$$

$$\begin{pmatrix} 2 & -1 \\ -5 & 3 \end{pmatrix} \begin{pmatrix} L1 \\ L2 \end{pmatrix}$$

$$\begin{aligned}
& \rightarrow \begin{pmatrix} 1 & 7 & 11 & 2 & -1 \\ 0 & -16 & -26 & -5 & 3 \\ 1 & 0 & 0 & & \\ 0 & 1 & 0 & & \\ 0 & 0 & 1 & & \end{pmatrix} \\
Cj &= C1 \times \circ \quad (j > 1) \\
& \rightarrow \begin{pmatrix} 1 & 0 & 0 & 2 & -1 \\ 0 & -16 & -26 & -5 & 3 \\ 1 & -7 & -11 & & \\ 0 & 1 & 0 & & \\ 0 & 0 & 1 & & \end{pmatrix} \\
(C2 & C3) \begin{pmatrix} -5 & -13 \\ 3 & 8 \end{pmatrix} \\
& \rightarrow \begin{pmatrix} 1 & 0 & 0 & 2 & -1 \\ 0 & 2 & 0 & -5 & 3 \\ 1 & 2 & 3 & & \\ 0 & -5 & -13 & & \\ 0 & 3 & 8 & & \end{pmatrix}
\end{aligned}$$

As a result,

$$\begin{aligned}
\begin{pmatrix} 1 & 0 & 0 \\ 0 & 2 & 0 \end{pmatrix} &= \begin{pmatrix} 2 & -1 \\ -5 & 3 \end{pmatrix} \begin{pmatrix} 3 & 5 & 7 \\ 5 & 3 & 3 \end{pmatrix} \begin{pmatrix} 1 & 2 & 3 \\ 0 & -5 & -13 \\ 0 & 3 & 8 \end{pmatrix}, \\
\begin{pmatrix} 2 & -1 \\ -5 & 3 \end{pmatrix}^{-1} &= \begin{pmatrix} 3 & 1 \\ 5 & 2 \end{pmatrix}, \\
\begin{pmatrix} 1 & 2 & 3 \\ 0 & -5 & -13 \\ 0 & 3 & 8 \end{pmatrix}^{-1} &= \begin{pmatrix} 1 & 7 & 11 \\ 0 & -8 & -13 \\ 0 & 3 & 5 \end{pmatrix}.
\end{aligned}$$

[7] `os_md.mdivisor(mat([dx,0,0],[0,dx,0],[0,0,dx]),[x,dx]|dviout=3)`

$$\begin{aligned}
\begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & \partial^3 \end{pmatrix} &= P \begin{pmatrix} \partial & 0 & 0 \\ 0 & \partial & 0 \\ 0 & 0 & \partial \end{pmatrix} Q, \\
P &= \begin{pmatrix} -x & 1 & 0 \\ -\frac{1}{2}x\partial - 1 & \frac{1}{2}\partial & -\frac{1}{2}x^2\partial - 2x \\ -x\partial^2 - 3\partial & \partial^2 & -x^2\partial^2 - 6x\partial - 6 \end{pmatrix} = \begin{pmatrix} \partial & -x^2\partial^2 - 4x\partial - 2 & \frac{1}{2}x^2\partial + 2x \\ x\partial + 1 & -x^3\partial^2 - 4x^2\partial - 2x & \frac{1}{2}x^3\partial + 2x^2 \\ 0 & \partial & \frac{-1}{2} \end{pmatrix}^{-1}, \\
Q &= \begin{pmatrix} 1 & -x^2\partial - 2x & \frac{1}{2}x^2\partial^3 + x\partial^2 - \partial \\ x & -x^3\partial - x^2 & \frac{1}{2}x^3\partial^3 + \frac{1}{2}x^2\partial^2 - x\partial + 1 \\ 0 & 1 & -\frac{1}{2}\partial^2 \end{pmatrix} = \begin{pmatrix} -x\partial & \partial & 0 \\ -\frac{1}{2}x\partial^2 - \partial & \frac{1}{2}\partial^2 & -\frac{1}{2}x^2\partial^2 - 2x\partial \\ -x & 1 & -x^2 \end{pmatrix}^{-1}.
\end{aligned}$$

[8] `A=mat([2,-2,-2],[0,1,-1],[0,0,2])$`

[9] `os_md.mdivisor(os_md.mgen(3,0,[x],0)-A,x|dviout=2)$`

$$\begin{pmatrix} x-2 & 2 & 2 & 1 & 0 & 0 \\ 0 & x-1 & 1 & 0 & 1 & 0 \\ 0 & 0 & x-2 & 0 & 0 & 1 \\ 1 & 0 & 0 & & & \\ 0 & 1 & 0 & & & \\ 0 & 0 & 1 & & & \end{pmatrix}$$

$C1 \leftrightarrow C2$

$$\rightarrow \begin{pmatrix} 2 & x-2 & 2 & 1 & 0 & 0 \\ x-1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & x-2 & 0 & 0 & 1 \\ 0 & 1 & 0 & & & \\ 1 & 0 & 0 & & & \\ 0 & 0 & 1 & & & \end{pmatrix}$$

$$L1 \leftarrow (\frac{1}{2}) \times L1$$

$$\rightarrow \begin{pmatrix} 1 & \frac{1}{2}(x-2) & 1 & \frac{1}{2} & 0 & 0 \\ x-1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & x-2 & 0 & 0 & 1 \\ 0 & 1 & 0 & & & \\ 1 & 0 & 0 & & & \\ 0 & 0 & 1 & & & \end{pmatrix}$$

$$Li = \circ \times L1 \quad (i > 1)$$

$$\rightarrow \begin{pmatrix} 1 & \frac{1}{2}(x-2) & 1 & \frac{1}{2} & 0 & 0 \\ 0 & -\frac{1}{2}(x-2)(x-1) & -(x-2) & -\frac{1}{2}(x-1) & 1 & 0 \\ 0 & 0 & x-2 & 0 & 0 & 1 \\ 0 & 1 & 0 & & & \\ 1 & 0 & 0 & & & \\ 0 & 0 & 1 & & & \end{pmatrix}$$

$$Cj = C1 \times \circ \quad (j > 1)$$

$$\rightarrow \begin{pmatrix} 1 & 0 & 0 & \frac{1}{2} & 0 & 0 \\ 0 & -\frac{1}{2}(x-2)(x-1) & -(x-2) & -\frac{1}{2}(x-1) & 1 & 0 \\ 0 & 0 & x-2 & 0 & 0 & 1 \\ 0 & 1 & 0 & & & \\ 1 & -\frac{1}{2}(x-2) & -1 & & & \\ 0 & 0 & 1 & & & \end{pmatrix}$$

$$L2 \leftrightarrow L3, \quad C2 \leftrightarrow C3$$

$$\rightarrow \begin{pmatrix} 1 & 0 & 0 & \frac{1}{2} & 0 & 0 \\ 0 & x-2 & 0 & 0 & 0 & 1 \\ 0 & -(x-2) & -\frac{1}{2}(x-2)(x-1) & -\frac{1}{2}(x-1) & 1 & 0 \\ 0 & 0 & 1 & & & \\ 1 & -1 & -\frac{1}{2}(x-2) & & & \\ 0 & 1 & 0 & & & \end{pmatrix}$$

$$\begin{pmatrix} 1 & 0 \\ 1 & 1 \end{pmatrix} \begin{pmatrix} L2 \\ L3 \end{pmatrix}$$

$$\rightarrow \begin{pmatrix} 1 & 0 & 0 & \frac{1}{2} & 0 & 0 \\ 0 & x-2 & 0 & 0 & 0 & 1 \\ 0 & 0 & -\frac{1}{2}(x-2)(x-1) & -\frac{1}{2}(x-1) & 1 & 1 \\ 0 & 0 & 1 & & & \\ 1 & -1 & -\frac{1}{2}(x-2) & & & \\ 0 & 1 & 0 & & & \end{pmatrix}$$

$$L3 \leftarrow (-2) \times L3$$

$$\rightarrow \begin{pmatrix} 1 & 0 & 0 & \frac{1}{2} & 0 & 0 \\ 0 & x-2 & 0 & 0 & 0 & 1 \\ 0 & 0 & (x-2)(x-1) & x-1 & -2 & -2 \\ 0 & 0 & 1 & & & \\ 1 & -1 & -\frac{1}{2}(x-2) & & & \\ 0 & 1 & 0 & & & \end{pmatrix}$$

As a result,

$$\begin{pmatrix} 1 & 0 & 0 \\ 0 & x-2 & 0 \\ 0 & 0 & (x-2)(x-1) \end{pmatrix} = \begin{pmatrix} \frac{1}{2} & 0 & 0 \\ 0 & 0 & 1 \\ x-1 & -2 & -2 \end{pmatrix} \begin{pmatrix} x-2 & 2 & 2 \\ 0 & x-1 & 1 \\ 0 & 0 & x-2 \end{pmatrix} \begin{pmatrix} 0 & 0 & \frac{1}{2}(x-2) \\ 1 & -1 & 0 \\ 0 & 1 & 0 \end{pmatrix}$$

$$\begin{pmatrix} \frac{1}{2} & 0 & 0 \\ 0 & 0 & 1 \\ x-1 & -2 & -2 \end{pmatrix}^{-1} = \begin{pmatrix} 2 & 0 & 0 \\ x-1 & -1 & -\frac{1}{2} \\ 0 & 1 & 0 \end{pmatrix},$$

$$\begin{pmatrix} 0 & 0 & 1 \\ 1 & -1 & -\frac{1}{2}(x-2) \\ 0 & 1 & 0 \end{pmatrix}^{-1} = \begin{pmatrix} \frac{1}{2}(x-2) & 1 & 1 \\ 0 & 0 & 1 \\ 1 & 0 & 0 \end{pmatrix}.$$

18. `sqrtdo(p, [x, ∂x]) ?`

19. `toeul(p, [x, ∂x], n)`

:: Expresses a (Fuchsian) differential operator p in Euler type at $x = n$

Transforms p by the coordinate transformation $x \mapsto x + n$ and replaces $x\partial_x$ by ∂_x and changes it so that the coefficients are polynomials

If n is the string "infty", transforms p by the coordinate transformation $x \mapsto x + n$ and replaces $x\partial_x$ by ∂_x and multiplies it by a suitable power of x .

```
[0] os_md.toeul(os_md.ghg([a,b],[c]), x, 0);
(-x+1)*dx^2+((-a-b)*x+c-1)*dx-b*a*x
[1] os_md.toeul(os_md.ghg([a,b],[c]), x, "infty");
(x-1)*dx^2+((-c+1)*x+a+b)*dx-b*a
```

20. `fromeul(p, [x, px], n)`

:: Transforms the differential operator p of Euler type into normal form (the above inverse)

Multiplies by a power of $x - n$ so that the coefficient does not vanish at $x = n$.

```
[0] os_md.fromeul(dx,x,1);
dx
[1] os_md.fromeul(dx-a,x,1);
(x-1)*dx-a
```

21. `expat(p, [x, ∂x], n)`

:: Returns characteristic exponents of a differential operator p at a regular singular point $x = n$

- n may be a string "infty" (which means $n = \infty$).

- If p is Fuchsian and n is "?", the exponents at all singular points are obtained.

- See (87) for `ghg()` in the following. It is the operator define Gauss hypergeometric equation.

```
[0] os_md.expat(os_md.ghg([a,b,c],[d,e]), x, 0);
[-d+1,-e+1,0]
[1] os_md.expat(os_md.ghg([a,b,c],[d,e]), x, 1);
[-a-b-c+d+e,1,0]
[2] os_md.expat(os_md.ghg([a,b,c],[d,e]), x, 2);
[1,2,0]
[3] os_md.expat(os_md.ghg([a,b,c],[d,e]), x, "infty");
[a,b,c]
[4] os_md.expat(os_md.ghg([a,b,c],[d,e]), x, "?");
[[0,[-d+1,-e+1,0]],[1,[-a-b-c+d+e,1,0]],[infty,[a,b,c]]]
```

22. `sftexp(p, [x, ∂x], n, r)`

:: Returns $(x - n)^{-r} \circ p \circ (x - n)^r$

Here $[\partial_x, r] = 0$ should valid.

```
[0] P=os_md.ghg([a,b],[c]);
(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-b*a
[1] os_md.sftexp(P,x,0,1-c);
(-x^2+x)*dx^2+((-a-b+2*c-3)*x-c+2)*dx+(-b+c-1)*a+(c-1)*b-c^2+2*c-1
[2] Q=os_md.sftexp(P,x,"infty",b);
(-x^3+x^2)*dx^2+((-a+b-1)*x^2+(-2*b+c)*x)*dx+b^2+(-c+1)*b
[3] os_md.expat(Q,x,"infty");
[a-b,0]
```

23. `fractrans(p, [x, ∂x], n0, n1, n2)`

:: Transforms p by the linear fractional transformation of x with $(n_0, n_1, n_2) \mapsto (0, 1, \infty)$

```
[0] os_md.fractrans(os_md.ghg([a,b],[c]),x,1,0,"infty");
(-x^2+x)*dx^2+((-a-b-1)*x+a+b-c+1)*dx-b*a
[1] P=os_md.fractrans(os_md.ghg([a,b],[c]),x,"infty",1,0);
(x^3-x^2)*dx^2+((-c+2)*x^2+(a+b-1)*x)*dx-b*a
[2] os_md.expat(P,x,1);
[-a-b+c,0]
[3] os_md.expat(P,x,0);
[a,b]
```

24. `chkexp(p, [x, ∂x], n, r, m)`

:: Returns condition so that p has the exponent $[r]_{(m)}$ at $x = n$

```
[0] os_md.chkexp(os_md.ghg([a,b],[c]),x,0,0,1);
[]
[1] os_md.chkexp(os_md.ghg([a,b],[c]),x,"infty",0,2);
[a+b-1,-b*a]
[2] os_md.chkexp(os_md.ghg([a,b],[c]),x,"infty",0,1);
[-b*a]
```

25. `soldif(p, [x, ∂x], n, q, m)`

26. `okuboetos(p, [x, ∂x] | diag=[c1, c2, ...])`

:: Transforms a single ODE of Okubo type to 1st order Okubo system

The ODE $Pu = 0$ of order m with polynomial coefficients is of Okubo type if the degree of the coefficients of the n -th derivatives are of degree at most n ($n = 0, \dots, m$).

- Returns $[[a_0, \dots, a_{m-1}], B, T]$
- $\text{diag}=[c_0, c_1, \dots]$: indicates the differentt order from $[a_0, \dots, a_{m-1}]$.
- A single Fuchsian ODE is changed to a Fuchsian ODE of Okubo type by several transformations of $p \mapsto p * \partial_x + p'$.

$$(x - a_i)u'_i = \sum_{j=0}^{m-1} B_{ij}u_j \quad (i = 0, \dots, m-1),$$

$$u_i = \sum_{j=0}^{m-1} T_{i,j}u^{(j)}.$$

```

[0] P = os_md.ghg([a,b],[c]);
(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-b*a
[1] R = os_md.okuboetos(P,x)$
[2] R[0];
[ 0 1 ]
[3] R[1];
[ -c+1 1 ]
[ (-b+c-1)*a+(c-1)*b-c^2+2*c-1 -a-b+c-1 ]
[4] R[2];
[ 1 0 ]
[ c-1 x ]
[5] det(R[1]);
b*a
[6] os_md.fctrtos(R[1][1][0]);
-(b-c+1)*(a-c+1)
[7] R = os_md.okuboetos(P,x|diag=[1,0])$
[8] R[0];
[ 1 0 ]
[9] R[1];
[ -a-b+c 1 ]
[ (-b+c)*a+c*b-c^2 -c ]
[10] R[2];
[ 1 0 ]
[ a+b-c x-1 ]]

```

These mean

$$u = F(a, b, c; x),$$

$$\begin{pmatrix} u_0 \\ u_1 \end{pmatrix} = \begin{pmatrix} u \\ (c-1)u + xu' \end{pmatrix},$$

$$\begin{pmatrix} x & x-1 \end{pmatrix} \begin{pmatrix} u'_0 \\ u'_1 \end{pmatrix} = \begin{pmatrix} 1-c & 1 \\ -(b-c+1)(a-c+1) & -a-b+c-1 \end{pmatrix} \begin{pmatrix} u_0 \\ u_1 \end{pmatrix}.$$

In particular

$$v = \begin{pmatrix} v_0 \\ v_1 \end{pmatrix} = \begin{pmatrix} u \\ \frac{c-1}{a-c+1}u + \frac{x}{a-c+1}u' \end{pmatrix},$$

$$\begin{pmatrix} x & x-1 \end{pmatrix} \begin{pmatrix} v'_0 \\ v'_1 \end{pmatrix} = \begin{pmatrix} 1-c & a-c+1 \\ -(b-c+1) & -a-b+c-1 \end{pmatrix} \begin{pmatrix} v_0 \\ v_1 \end{pmatrix},$$

$$\frac{dv}{dx} = \frac{\begin{pmatrix} 1-c & a-c+1 \\ 0 & 0 \end{pmatrix}}{x}v + \frac{\begin{pmatrix} 0 & 0 \\ -b+c-1 & -a-b+c-1 \end{pmatrix}}{x-1}v$$

27. `integdlog([fi],x|raw=1)`

Get integrability condition of Pfaffian system $du = \sum_i A_i d \log f_i u$

28. $x = [x_1, \dots]$ is a set of variables

`ai,j` means $[A_i, A_j]$.

- [0] os_md.integdlog([x,y,x-y],[x,y]);
[-a01-a02,a12+a02]

[1] os_md.integdlog([x+y+z,x+y,y+z,x+z,x,y,z],[x,y,z]);
[-a25+a56,a26+a56,-a34+a46,a36+a46,a06+a16,-a14+a45,a04+a24,a23,
a13,-a03+a35,a15+a45,a05+a35,-a02+a24,-a01+a16,a12]

The result of [0] implies that the integrability condition of $du = (A_0 d \log x + A_1 d \log y + A_2 d \log(x - y))u$ is $[A_0, A_1 + A_2] = [A_2, A_0 + A_1] = 0$ corresponding to a01+a02 and a12+a02.

29. `stoe(p, [x, dx], m)`

:: Converts a first order system of ODE to a single ODE

- Returns the equation satisfied by u_m for the system $u'_i = \sum_{j \geq 0} p_{ij}(x)u_j$. Here p is a matrix with elements in rational functions.
- If m is a list $[m_1, m_2]$, then the expression of u_{m_2} in terms of u_{m_1} is returned, namely, the operator applying to u_{m_2} to get u_{m_1} .
- If m is negative, it implies $[-m, 0]$.
- See `baseODE()` for non-linear ODE.

```
[0] A=newmat(2,2,[[(-c+1)/(x),(a-c+1)/(x)],[(-b+c-1)/(x-1),(-a-b+c-1)/(x-1)]) ;
[ (-c+1)/(x) (a-c+1)/(x) ]
[ (-b+c-1)/(x-1) (-a-b+c-1)/(x-1) ]
[1] os_md.stoe(A,x,0);
(x^2-x)*dx^2+((a+b+1)*x-c)*dx+b*a
[2] T=os_md.mgen(4,0,[x,x-1,x,x-1],0);
[ x 0 0 0 ]
[ 0 x-1 0 0 ]
[ 0 0 x 0 ]
[ 0 0 0 x-1 ]
[3] A=newmat(4,4,[[a1,1],[a21,a2,1],[a31,a32,a3,1],[a41,a42,a43,a4]]);
[ a1 1 0 0 ]
[ a21 a2 1 0 ]
[ a31 a32 a3 1 ]
[ a41 a42 a43 a4 ]
[4] C=os_md.myinv(T)*A;
[ (a1)/(x) (1)/(x) 0 0 ]
[ (a21)/(x-1) (a2)/(x-1) (1)/(x-1) 0 ]
[ (a31)/(x) (a32)/(x) (a3)/(x) (1)/(x) ]
[ (a41)/(x-1) (a42)/(x-1) (a43)/(x-1) (a4)/(x-1) ]
[5] P=os_md.stoe(C,x,0)$
[6] os_md.expat(P,x,"?");
[[0,[a3+1,a1,1,0]],[1,[a4+2,a2+1,1,0]],
[infty,[dx^4+(a4+a3+a1+a2)*dx^3+(-a21-a32-a43+(a3+a1+a2)*a4+(a1+a2)*a3+a2*a1)*
*dx^2+((-a4-a3)*a21+(-a4-a1)*a32+(-a1-a2)*a43+a31+a42+((a1+a2)*a3+a2*a1)*a4+
a2*a1*a3)*dx+(a43-a3*a4)*a21-a1*a4*a32-a41-a2*a1*a43+a4*a31+a1*a42+a2*a1*a3*a4]]]
[7] os_md.mperm(A,[0,2,1,3],1);
[ a1 0 1 0 ]
[ a31 a3 a32 1 ]
```

- ```

[a21 1 a2 0]
[a41 a43 a42 a4]
[8] Q=E[2][1][0]-os_md.polbyroot([1,4],dx|var=a);
(-a21-a32-a43)*dx^2+((-a4-a3)*a21+(-a4-a1)*a32+(-a1-a2)*a43+a31+a42)*dx+(a43
-a3*a4)*a21-a1*a4*a32-a41-a2*a1*a43+a4*a31+a1*a42

```
30. `etos(p, [x, dx], m)`  
:: Converts a single ODE to a first order system of ODE Converts a single equation  $Pu = 0$  of the order  $n$  to a first-order system  $\tilde{u}' = A\tilde{u}$  and returns  $A$ .
- $m$  is a matrix with elements in rational functions. Let  $m_{ij}$  be the  $(i, j)$ -element of  $m$ . Then the system is  $u_i = \sum m_{ij} u^{(j)}$ .
  - $m = 1$  means that  $m$  is the identity matrix.
  - If  $m$  is a list with length  $n$ , then  $m$  is identified with the diagonal matrix whose diagonal elements are given by  $m$ ,

```

[0] P=(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-a*b$
[1] M=os_md.etos(P,x,[1,x]);
[0 1]
[(-b*a)/(x-1) ((-a-b-1)*x+c)/(x^2-x)]
[2] os_md.pfrac(M,x|dviout=1);

$$\frac{\begin{pmatrix} 0 & 1 \\ 0 & 0 \end{pmatrix}}{x} + \frac{\begin{pmatrix} 0 & 0 \\ -ba & -(a+b-c+1) \end{pmatrix}}{x-1}$$


```

31. `dform(l, x|dif=1, log=1)`  
:: Calculates differential 1-form  $\sum l[i][0]d(l[i][1])$  or 2-form  $\sum l[i][0]d(l[i][1]) \wedge d(l[i][2])$  with variables  $x[0], x[1], \dots$ . Option `dif=1` means external derivative of 1-form
- $l[i][j]$  can be matrices
  - `dif=1` : exterior derivative of differential 1-form

```

[0] os_md.dform([[a*y,x/y],[b*x,y/x]],[x,y]);
[(a*x-b*y)/(x),x],[(-a*x+b*y)/(y),y]]
[1] os_md.dform([[a*y,x/y,x],[b*x,y/x,y]],[x,y]);
[[((a*x^2-b*y^2)/(y*x),x,y]]
[2] os_md.dform([[x-y,y],[x-y+1,x]],[x,y]|dif=1);
[[2,x,y]]

```

The above means

$$\begin{aligned}
ay \cdot d\left(\frac{x}{y}\right) + bx \cdot d\left(\frac{y}{x}\right) &= \frac{ax-by}{x}dx + \frac{-ax+by}{y}dy \\
ax \cdot d\left(\frac{x}{y}\right) \wedge dx + bx \cdot d\left(\frac{y}{x}\right) \wedge dy &= \frac{ax^2-by^2}{xy}dx \wedge dy \\
d((x-y)dy + (x-y-1)dx) &= 2dx \wedge dy
\end{aligned}$$

32. `solpokubo(p, [x, ∂_x], n)`  
:: Returns eigenvalues and eigenpolynomials of a single ODE of Okubo type  
Here the differential operator

$$p = a_m(x) \frac{d^m}{dx^m} + \cdots + a_1(x) \frac{d}{dx} + a_0(x)$$

with polynomial coefficients is of Okubo type when  $\deg_x a_m(x) = m$  and  $\deg_x a_\nu(x) \leq \nu$  for  $\nu = 0, \dots, m-1$ .

```

[0] P=x*(1-x)*dx^2+(c-a*x)*dx;
(-x^2+x)*dx^2+(-a*x+c)*dx
[1] os_md.solpokuboe(P,[x,dx],1);
[a*x-c,-a]
[2] os_md.solpokuboe(P,[x,dx],2);
[(a^2+3*a+2)*x^2+((-2*c-2)*a-2*c-2)*x+c^2+c,-2*a-2]
[3] os_md.fctrtos(@@[0]|var=x);
(a+1)*(a+2)*x^2-2*(c+1)*(a+1)*x+c*(c+1)

33. getSSE(p , [x,y,\dots] | get= s)
:: Get singularities, rank,... of holonomic systems defined by the ideal p etc.
• p is an ideal of a Weyl algebra given by a list
• Singularities of the equation
• get="rank" : rank of the equation if it is holonomic
• get="gr" : Groebner base
• get="top" : top terms of the Groebner base
• get=symbol : symbol ideal
• get="base" : base of the quotient by the ideal

[0] F2=os_md.ghg2([a,b,c],[[0,d],[0,e],[]]); /* Appell's F_2 */
[(-y*x*dx-a*y)*dy+(-x^2+x)*dx^2+((-a-c-1)*x-d+1)*dx-c*a,
(-y^2+y)*dy^2+(-y*x*dx+(-b-c-1)*y-e+1)*dy-b*x*dx-c*b]
[1] os_md.getSSE(F2,[x,y]);
[y,y-1,x,x-1,x+y-1] /* singularities */
[2] os_md.getSSE(F2,[x,y]|get="rank");
4
[3] os_md.getSSE(F2,[x,y]|get="base");
[dy^2,dx,dy,1]
[4] os_md.getSSE(F2,[x,y]|get="top");
[dx*dy,dx^2,dy^3]
[5] os_md.getSSE(F2,[x,y]|get="symbol");
[(-y^2+y)*dy^2-y*x*dx*dy,(-y^2+y)*dy^2+(x^2-x)*dx^2,
((y^2-y)*x+y^3-2*y^2+y)*dy^3,(y^2-y)*dy^3+(-y^2+y)*dx*dy^2]
[13366] os_md.getSSE(F2,[x,y]|get="gr");
[(-y^2+y)*dy^2+(-y*x*dx+(-b-c-1)*y-e+1)*dy-b*x*dx-c*b, ...
[6] F21=os_md.ghg2([a,aa],[b,bb],[c,cc],[[0,d,dd],[0,e,ee],[f]]));
[7] os_md.getSSE(F21,[x,y]);
[y,y-1,x,x-1,x+y,x+y-1]
[8] os_md.getSSE(F21,[x,y]|get="rank");
14
[9] os_md.getSSE(os_md.ghg2([1,1,2],[2,2,1]|symbol=1),[x,y]);
[y,y-1,x,x-1,x+y,x+y-1]
[10] os_md.getSSE(os_md.ghg2([2,2,1],[1,1,2]|symbol=1),[x,y]);
[y,y-1,x,x-1,x+y,(y-1)*x-y]
[11] os_md.getSSE(os_md.ghg2([0,0,2],[2,2,0]|symbol=1),[x,y]);
[y,x,x^2+(-2*y-2)*x+y^2-2*y+1]

```

```

[12] os_md.getSSE(os_md.ghg2([1,1,2],[3,3,0]|symbol=1),[x,y]);
[y,y-1,x,x-1,x^2+(-2*y-2)*x+y^2-2*y+1]
[13] os_md.getSSE(os_md.ghg2([1,1,3],[3,3,1]|symbol=1),[x,y]);
[y,y-1,x,x-1,x-y,x^2+(-2*y-2)*x+y^2-2*y+1]
[14] os_md.getSSE(os_md.ghg2([2,2,4],[4,4,2]|symbol=1),[x,y]);
[y,y-1,x,x-1,x-y,x^2+(-2*y-2)*x+y^2-2*y+1]
[15] os_md.getSSE(os_md.ghg2([2,2,4],[4,4,2]|symbol=1),[x,y]|get="rank");
28
[16] os_md.getSSE(os_md.ghg2([0,0,3],[3,3,0]|symbol=1),[x,y]);
[y,x,x^3+(3*y-3)*x^2+(3*y^2+21*y+3)*x+y^3-3*y^2+3*y-1]
[17] os_md.getSSE(os_md.ghg2([1,1,4],[4,4,1]|symbol=1),[x,y]);
[y,y-1,x,x-1,x+y,x^3+(3*y-3)*x^2+(3*y^2+21*y+3)*x+y^3-3*y^2+3*y-1]
[18] os_md.getSSE(os_md.ghg2([0,0,4],[4,4,0]|symbol=1),[x,y]);
[y,x,x^4+(-4*y-4)*x^3+(6*y^2-124*y+6)*x^2+(-4*y^3-124*y^2-124*y-4)*x+y^4-4*y^3
+6*y^2-4*y+1]
[19] os_md.getSSE(os_md.ghg2([1,1,1,1],[2,2,2,0]|symbol=1),[x,y,z]);
[z,z-1,y,y-1,y+z-1,x,x-1,x+z-1,x+y-1,x+y+z-1]
[20] os_md.getSSE(os_md.ghg2([1,1,1,2],[2,2,2,1]|symbol=1),[x,y,z]);
[z,z-1,y,y-1,y+z,y+z-1,x,x-1,x+z,x+z-1,x+y,x+y-1,x+y+z,x+y+z-1]
[21] os_md.getSSE(os_md.ghg2([1,1,1,2],[2,2,2,1]|symbol=1),[x,y,z]|get="rank");
15

```

### 3.1.2 Fractional calculus

The functions in this section realize the results of [O3], [O5], [O7], [O9] and [O10].

34. `laplace(p, [x,  $\partial_x$ ])`  
`laplace(p, [[x1,  $\partial_{x_1}$ ], [x2,  $\partial_{x_2}$ ], ...])`  
:: (partial) Laplace transform of a differential operator  $p$      $(x, \partial_x) \mapsto (-\partial_x, x)$ 

```
[0] os_md.laplace(x^2*dx+1,x);
x*dx^2+2*dx+1
```
35. `laplace1(p, [x,  $\partial_x$ ])`  
`laplace1(p, [[x1,  $\partial_{x_1}$ ], [x2,  $\partial_{x_2}$ ], ...])`  
:: Inverse of (partial) Laplace transform of a differential operator  $p$   
 $(x, \partial_x) \mapsto (\partial_x, -x)$ 

```
[0] os_md.laplace1(x^2*dx+1,x);
-x*dx^2-2*dx+1
```
36. `mc(p, [x,  $\partial_x$ ], r)`  
:: Middle convolution  $mc_r(p)$  of a differential operator  $p$ 

```
[0] P=os_md.mc(x*(1-x)*dx-a-b*x,x,r);
(x^2-x)*dx^2+((-2*r+b+2)*x+r+a-1)*dx+r^2+(-b-1)*r+b
[1] os_md.expat(P,x,"?");
[[0,[r+a,0]],[1,[r-a-b,0]],[infty,[-r+b,-r+1]]]
```
37. `mce(p, [x,  $\partial_x$ ], n, r)`

:: Transformation  $p$  into  $(\partial_x - n)^{-r} \circ p \circ (\partial_x - n)^r$  and returns corresponding differential operator  
 Here  $n$  should commute with  $\partial_x$ . If  $n = 0$ , this corresponds to the middle convolution  $mc_r(p)$ .

38. **rede**( $p$ , [ $x, \partial_x$ ])  
**rede**( $p$ , [[ $x_1, \partial_{x_1}$ ], [ $x_2, \partial_{x_2}$ ], ...])  
:: Reduced representative of a differential operator  $p$

```
[0] os_md.rede(x*(y^2-1)*dx+(y+1)/x*dy,[[x],y]);
dy+(y-1)*x^2*dx
```

39. **ad**( $p$ , [ $x, \partial_x$ ],  $f$ )  
:: Transform of a differential operator  $p$  defined by  $\partial_x \rightarrow \partial_x - f$

40. **add**( $p$ , [ $x, \partial_x$ ],  $f$ )  
:: Addition of a differential operator  $p$  defined the map  $\partial_x \rightarrow \partial_x - f$ , namely, **rede(ad())**

```
[0] os_md.add(dx^2+x,x,1/x^2);
x^4*dx^2-2*x^2*dx+x^5+2*x+1
```

41. **vadd**( $p$ , [ $x, \partial_x$ ], [[ $c_0, r_0$ ], [ $c_1, r_1$ ], ...])  
:: Versal addition  $\text{add}(p, [x, \partial_x], \sum_{j \geq 0} \frac{r_j x^j}{\prod_{\nu=0}^j (1 - c_\nu x)})$

42. **add1**( $p$ , [ $x, \partial_x$ ],  $f$ )  
:: **laplace1(add(laplace()))**

```
[0] os_md.add(x,x,a/(x-c));
-x*dx+c*x-a-1
```

43. **cotr**( $p$ , [ $x, \partial_x$ ],  $f$ )  
:: Transform of a differential operator  $p$  defined by  $x \mapsto f(x)$

44. **rcotr**( $p$ , [ $x, \partial_x$ ],  $f$ )  
:: Reduced representative of the transformation  $P$  defined by  $x \mapsto f(x)$

45. **s2sp**( $p$  | num=1, std=k, short=1)  
:: Converts a list of lists of numbers to and from its expression using a list of strings

- 10, 11, 12, ..., 35 are written by **a**, **b**, **c**, ..., **z**, respectively. A negative number and  $^$  and a fractional number is allowed.
- $^$  means the repetition of a same number (does not mean a power)
- a number larger than 9 can be expressed with "(" and ")" but its nesting is not allowed.
- num=1 : **a**, **b**, **c**, ... is not used for the return but use "(" and ")".
- For the parameters  $p$ , 36, 37, ..., 60 may be expressed by **A**, **B**, ..., **Z**.
- The element in  $p$  which is not a rational number is expressed by a string with < >.
- std=k : the spectral types are arranged with the numbers according to the multiplicities at each singular points ns and the singular points are arranged in the lexicographic order
  - $k = 1$  : started from smaller ones
  - $k = -1$  : started from larger ones
- short=1 : if the same number repeats more than 3 times, the expression with  $^*$  is used. In this case the option std=k is also allowed.

```
[0] os_md.s2sp("121,22,211");
[[1,2,1],[2,2],[2,1,1]]
[1] os_md.s2sp(@@);
121,22,211
[2] os_md.s2sp("5^2,541,1^a");
[[5,5],[5,4,1],[1,1,1,1,1,1,1,1]]
```

```

[3] os_md.s2sp("2-3a,1^9");
[[2,-3,10],[1,1,1,1,1,1,1,1,1]]
[4] newmat(4,4,os_md.s2sp("1,01,001,0001"));
[1 0 0 0]
[0 1 0 0]
[0 0 1 0]
[0 0 0 1]
[5] S=os_md.s2sp("1(-15)a-b,fg-7/(80)");
[[1,-15,10,-11],[15,16,-7/80]]
[6] os_md.s2sp(S);
1(-15)a(-11),fg(-7/80)
[7] os_md.s2sp(S|num=1);
1(-15)(10)(-11),(15)(16)(-7/80)
[8] os_md.s2sp([[1,2],[a-b,2.5]]);
12,<a-b><2.5>
[9] os_md.s2sp(@@);
[[1,2],[a-b,2.5]]
[10] os_md.s2sp(os_md.s2sp("32,2111,41,23|std=1"));
2111,32,32,41
[11] os_md.s2sp(os_md.s2sp("32,2111,41,23|std=-1"));
41,32,32,2111
[12] os_md.s2sp("111111,33,222"|short=1,std=-1);
33,222,1^6

```

#### 46. `s2csp(p|n=f)`

:: Converts expressions of a spectral type with unramified irregular singularities

- A spectral type with confluent singularities is a list of singularities at each singular points
- Spectral type of an irregular singular point is nested lists of multiplicities according to the levels of irregularities
- A spectral type with unramified irregular singularities is expressed a string according to its versal unfolding (cf. [O10]).
- $n = 1$  : Supports an expression with "( " and ")" (cf. [Hiroe-Kawakami-Nakamura-Sakai]).
- $n = -1$  : Supports the above expression both for input and output.

```

[0] L=os_md.s2csp("111,21,111");
[[1,1,1],[2,1],[1,1,1]]
[1] os_md.s2csp(L);
111,21,111
[2] L=os_md.s2csp("111|21,111");
[[[2,[1,1]],[1,[1]]],[1,1,1]]
[3] os_md.s2csp(L);
111|21,111
[4] os_md.s2csp(L|n=1);
(1 1) (1),1 1 1
[5] L=os_md.s2csp("111|111,21");
[[[1,[1]],[1,[1]],[1,[1]]],[2,1]]

```

```

[6] os_md.s2csp(L);
111|111,21
[7] os_md.s2csp(L|n=1);
(1) (1) (1),2 1
[8] L=os_md.s2csp("111|111|21");
[[[2,[[1,[1]],[1,[1]]]], [1,[[1,[1]]]]]]
[9] os_md.s2csp(L);
111|111|21
[10] os_md.s2csp(L|n=1);
((1) (1)) ((1))
[11] os_md.s2csp("((1)(1))((1))|n=1";
111|111|21
[12] os_md.s2csp("(1)(1)(1),21"|n=-1;
[[[1],[1],[1]],[2,1]]
[13] os_md.s2csp([[[1],[1],[1]],[2,1]]|n=-1);
(1) (1) (1),2 1

47. chkspt(m|mat=1,opt=t,dumb=1,show=1) or fspt(m,t)
:: Checks a tuple of partitions m (spectral type) or a generalized Riemann scheme (GRS) and
returns [pts, ord, idx, fuchs, rod, redsp, fspt]
pts : number of singular points
ord : rank
idx : index of rigidity
fuchs : Fuchs relation
rod : rank reduced by one-step reduction
redsp : the positions of exponents at singular points specified by one-step reduction
fspt : corresponding basic spectral type
m can be indicated by an element of the root lattice of Kac-Moody root space (cf. sproot()).

```

$$m = [n, [n_{0,1}, n_{0,2}, \dots], [n_{1,1}, n_{1,2}, \dots], \dots], \\ m_{j,\nu} = n_{j,\nu-1} - n_{j,\nu} \quad (j \geq 0, \nu \geq 1, n_{j,0} := n)$$

- mat=1 : Schleginger type
  - dumb=1 : stop showing errors
  - dumb=-1 : show the result if opt= is not indicated.
  - /show=1/ : same as above
  - return : -1 means the tuple is not correct, 0 means that the spectral type is not realizable
- The following are options  $t = 0, 1, \dots$ , respectively, and fspt( $m, t$ ) is possible, but in the case of chkspt(), opt should be indicated by a string.
- opt="sp" or 0: return spectral type of the given GRS
  - opt="basic" or 1: chkspt( $m$ ) : return fspt (return 0 if  $m$  is not realizable)
  - opt="construct" or 2: return the construction from the basic spectral type (return 0 if  $m$  is not realizable)
  - opt="strip" or 3: delete the exponents with the multiplicity 0 from the generalized Riemann scheme or the spectral type
  - opt="short" or 4: give GRS in a short form
  - opt="long" or 5: give GRS in a normal form
  - opt="sort" or 6: return a sorted spectral type at each singular point
  - opt="root" or 7: return the construction by Kac-Moody Weyl group

The returned list has 3 elements which are base spectral type, given spectral type and the list of reflections. The reflection has 3 elements, namely, the value of inner product, the branch and the position in the star-shaped Dynkin diagram which specified the root in the Dynkin diagram.

- `opt="idx"` : return index of rigidity
- `opt="kac"` : return the expression in Kac-Moody root system

The short form means that the exponents with free multiplicity are given the values without the multiplicity.

```
[0] os_md.chkspt([[1,2,1],[2,2],[1,1,1,1]]);
[3,4,2,0,1,[1 0 0],[[1],[1],[1]]]
[1] os_md.chkspt("121,22,1111");
[3,4,2,0,1,[1 0 0],[[1],[1],[1]]]
[2] M=os_md.sp2grs([[1,1,1,1],[2,1,1],[2,2]],[a,b,c],[1,1]);
[[[1,-2*c1-2*c0-b1-2*b0-a1-b2-a3-a2+3],[1,a1],[1,a2],[1,a3]],
[[2,b0],[1,b1],[1,b2]],[[2,c0],[2,c1]]]
[3] os_md.sp2grs([[1,1,1,1],[2,1,1],[2,2]],[a,b,c],[1,1]|mat=1);
[[[1,-2*c1-2*c0-b1-2*b0-a1-b2-a3-a2],[1,a1],[1,a2],[1,a3]],
[[2,b0],[1,b1],[1,b2]],[[2,c0],[2,c1]]]
[4] os_md.chkspt(M|opt="sp");
[[1,1,1,1],[2,1,1],[2,2]]
[5] os_md.chkspt(M|opt="basic");
[[1],[1],[1]]
[6] os_md.chkspt(M|opt="construct");
[
 [[1],[1],[1]],
 [[1,1],[1,1],[1,1]],
 [[1,1,1],[1,1,1],[2,1]],
 [[1,1,1,1],[2,1,1],[2,2]]
]
[7] os_md.chkspt(M|opt="short");
[[-2*c1-2*c0-b2-b1-2*b0-a2-a1-a3+3,a1,a2,a3],
[[2,b0],b1,b2],[[2,c0],[2,c1]]]
[8] os_md.chkspt([[0,1,2,1],[2,0,2,0],[1,1,1,1]]|opt="strip");
[[2,1,1],[2,2],[1,1,1,1]]
[9] os_md.chkspt([[0,1,2,1],[2,0,2,0],[1,1,1,1]]|opt="sort");
[[2,1,1,0],[2,2,0,0],[1,1,1,1]]
[10] os_md.chkspt([[0,1,2,1],[2,0,2,0],[1,1,1,1]]|opt="kac");
[4,[4,3,1],[2,2,0],[3,2,1]]
[11] os_md.chkspt("21,21,21,21"|opt="root");
[[[1],[1],[1]],[[2,1],[2,1],[2,1],[2,1]],
[[1,3,1],[1,2,1],[1,1,1],[1,0,1],[2,0,0]]]
[12] os_md.chkspt("21,21,21,111");
[4,3,0,0,1,[0 0 0 0],[[1,1],[1,1],[1,1],[1,1]]]
[13] os_md.chkspt([[3,2],[2,2,1],[1,1,1,1]]);
```

```

illegal partitions
-1
[14] os_md.chkspt("31,31,31,22");
not realizable
0
[15] os_md.chkspt("43,322,1^7");
[3,7,0,0,1,[0 0 0],[[3,3],[2,2,2],[1,1,1,1,1,1]]]
[16] os_md.chkspt("112,22,1111"|show=1);
points: 3
rank: 4
index: 2
reduct: 1 at [2 0 0] --> [[1],[1],[1]]
1
[17] os_md.chkspt([[2*m,2*m],[m,m,m,m],[m,m,m,m-1,1]]|opt="idx");
-2*m+2
[18] os_md.chkspt([[2*m,2*m],[m,m,m,m],[m,m,m,m-1,1]]);
[3,4*m,-2*m+2,0,-1,[0 0 3],[[2*m,2*m],[m,m,m,m],[m-1,m,m,m,1]]]
[19] os_md.chkspt("21,21,21,111");
[4,3,0,0,1,[0 0 0 0],[[1,1],[1,1],[1,1],[1,1]]]
[20] os_md.chkspt([[2*m,2*m],[m,m,m,m],[m,m,m,m-1,1]]|opt="idx");
-2*m+2
[21] os_md.chkspt([[2*m,2*m],[m,m,m,m],[m,m,m,m-1,1]]);
[3,4*m,-2*m+2,0,-1,[0 0 3],[[2*m,2*m],[m,m,m,m],[m-1,m,m,m,1]]]

```

#### 48. chkcsp(m|show=1)

:: analyze spectral type of ODE with unramified irregular singularities

- spectral type  $m$  is indicated by a list or a string
- Return the list [number of singular points, Poincare ranks at singular points, rank of  $m$ , index of rigidity, maximal rank decreased by a reduction, places where the multiplicities are decreased by the reduction, original spectral type, reduced spectral type]

See an example with the option `show=1`.

```

[0] os_md.chkcsp("1111|211,22");
[2,[1,0],4,2,1,[0,0],
1111|211,22, [[[2,[1,1]],[1,[1]],[1,[1]]],[2,2]],
111|111,12,[[[1,[1]],[1,[1]],[1,[1]]],[1,2]]]
[1] os_md.chkcsp("1111|211,22"|show=1);
1111|211,22 (1 1) (1) (1),2 2
points: 2 with Poincare ranks [1,0]
rank: 4
index: 2
reduct: 1 at [0,0] -> 111|111,12 (1) (1) (1),1 2
[2] os_md.chkcsp("1111|211|22"|show=1);
1111|211|22 ((1 1)) ((1) (1))
points: 1 with Poincare ranks [2]
rank: 4

```

```

index: 2
reduct: 1 at [0] -> 111|111|12 ((1)) ((1) (1))

49. spgen($n \mid \text{eq}=1, \text{str}=1, \text{std}=f, \text{pt}=[k, \ell], \text{sp}=m, \text{basic}=1$)
:: Gets rigid tuples of partitions with the rank $\leq n$ (or the orbit of a given tuple)
 If $n \leq 0$, fundamental tuples with the index of the rigidity n are obtained.
 • eq=1 : the rank is exactly n (when $n > 1$)
 • str=1 : returns in string form
 • pt=[k, ℓ] : the number of the partition is in $[k, \ell]$. $\text{pt}=k$ means $k = \ell$
 • sp=m : returns tuples in the orbit of a tuple (spectral type) m only to the direction with
 higher rank.
 If basic=1 is indicated, the direction is not specified.
 • std=f : The multiplicities are arranged from larger ones at each partition and the parti-
 tions are arranged from smaller (resp. larger) tuples if $f = 1$ (resp. $f = -1$).

[0] os_md.spgen(4|eq=1,pt=4);
[[[2,2],[2,2],[2,2],[3,1]],[[2,2],[3,1],[3,1],[2,1,1]]]
[1] ltov(os_md.spgen(4|eq=1,pt=4,str=1));
[22,22,22,31 22,31,31,211]
[2] ltov(os_md.spgen(4|eq=1,pt=4,str=1,std=-1));
[31,22,22,22 31,31,22,211]
[3] ltov(os_md.msort(os_md.spgen(4|eq=1,pt=4,str=1,std=-1),[-1,0]));
[31,31,22,211 31,22,22,22]
[4] ltov(os_md.spgen(-2|pt=4,str=1));
[21,21,111,111 22,22,22,211 31,22,22,1111]
[5] ltov(os_md.spgen(4|eq=1,sp="11,11,11,11",str=1,std=-1));
[31,31,22,1111 31,22,22,211 31,31,211,211 31,31,31,31,22]

[0] gets the list of rigid spectral types with 4 singular points whose rank equals 4.
[1] gets the same list as above in the string form
[2] gets the same list as above in the string form arranged in the inverse lexicographic order
[3] gets the list the same list as above further arranged by the order of tuples
[4] gets the list of fundamental tuples with the index of rigidity -2 and 4 singular points
[5] gets the list of tuples with the order 4 in the orbit containing "11,11,11,11" An example of a
program :

/* Get the list of rigid spectral types with rank 8 which have 4 singular points
 in the lexicographic order from the larger ones (in strings format) */
Rank=8; /* give rank */
[6] G=os_md.spgen(Rank|eq=1,pt=4); /* get spectral types */
[7] for(L=[];G!=[];G=cdr(G))
 L=cons(os_md.s2sp(os_md.s2sp(car(G)|std=-1)),L);
[8] L=msort(L,[-1,0]);

50. sproot($p, t \mid \text{dviout}=1, \text{only}=k, \text{sym}=t, \text{null}=1$)
:: Returns informations of the root corresponding to a spectral type $t = \text{"base", "length", "type", "part", "pair", "pairs", sp}$
 • length : the length of the element of the Weyl group which changes p basic.
 • base : same as chksp(p|opt="root") . The minimal expression of the element.
```

- **type** : the type of the element ( $= [\Delta(\mathbf{m})]$ , cf. [O3, (7.40)])
- **height** : the height of the corresponding root (the sum of the coefficients in the linear expression of the root in terms of simple roots cf. [O3, (7.35)])
- **part** : data for the set of real roots changed from positive to negative under the element ( $= \Delta(\mathbf{m})$  : corresponds to the condition of irreducibility. cf. [O3, (7.30)])  
See `chkspt(m|opt=root)` for the data.
- **pair, pairs**: decompositions of root corresponding to the reducibility. See [9] for the difference between **pair** and **pairs**.
  - `dviout=1` and `only=k` can be indicated. roots are indicated by the corresponding partitions
  - `iand(k, 1) = 1` : the decomposition whose paired one is also a partition
  - `iand(k, 2) = 2` : the decomposition whose paired one is a root with order 0
  - `iand(k, 4) = 4` : the decomposition whose paired one is a negative root
  - `sym=1` : identifies the decompositions under symmetries
  - `sym=2` : identifies the decompositions under symmetries only at each singular point
  - `null=1` : return nothing if there is no corresponding decompositions
- **sp** : If spectral type is indicated, the inner product with  $p$  as roots is returned

```
[0] os_md.sproot("11,11,11","height");
5
[1] os_md.sproot("11,11,11","length");
4
[2] os_md.sproot("11,11,11","type");
[[4,1]]
[3] os_md.sproot("11,11,11","base");
[[[1],[1],[1]],[[1,1],[1,1],[1,1]],
 [[1,2,1],[1,1,1],[1,0,1],[1,0,0]]]
[4] os_md.sproot("11,11,11","part");
[[[1],[1],[1]],[[1,1],[1,1],[1,1]],
 [[1,[[1,0],[1,0],[0,1]]],[1,[[1,0],[0,1],[1,0]]],
 [1,[[0,1],[1,0],[1,0]]],[1,[[1,0],[1,0],[1,0]]]]]
[4] os_md.sproot("11,11,11","11,11,11");
2
[5] os_md.sproot("11,11,11","10,10,10");
1
[6] os_md.sproot("31,31,22,211","length");
8
[7] os_md.sproot("31,31,22,211","type");
[[6,1],[2,2]]
[8] os_md.sproot("31,31,22,211","height");
11
[9] os_md.sproot("31,31,22,211","pairs"|dviout=1);
```

$$\begin{aligned}
 31,31,22,211 &= 10,10,01,001 \oplus 21,21,21,210 \\
 &= 20,11,11,110 \oplus 11,20,11,101 \\
 &= 11,20,11,110 \oplus 20,11,11,101 \\
 &= 10,10,01,010 \oplus 21,21,21,201 \\
 &= 10,10,10,001 \oplus 21,21,12,210
 \end{aligned}$$

$$\begin{aligned}
&= 10, 10, 10, 010 \oplus 21, 21, 12, 201 \\
&= 2(10, 10, 01, 100) \oplus 11, 11, 20, 011 \\
&= 2(10, 10, 10, 100) \oplus 11, 11, 02, 011
\end{aligned}$$

The first terms in the left hand side in the above correspond to the positive real roots in  $\Delta(\mathbf{m})$ . When "pair" indicated, the last two lines in the above are different as  $20, 20, 20, 200 \oplus 11, 11, 02, 011$  etc.

```
[10] os_md.sproot("31,31,22,211","pairs"|dviout=1,sym=1);
[11] os_md.sproot("31,31,22,211","pairs"|dviout=1,sym=2);
```

$$\begin{aligned}
31, 31, 22, 211 &= 20, 11, 11, 110 \oplus 11, 20, 11, 101 \\
&= 10, 10, 10, 010 \oplus 21, 21, 12, 201 \\
&= 2(10, 10, 10, 100) \oplus 11, 11, 02, 011 \\
31, 31, 22, 211 &= 20, 11, 11, 110 \oplus 11, 20, 11, 101 \\
&= 11, 20, 11, 110 \oplus 20, 11, 11, 101 \\
&= 10, 10, 10, 010 \oplus 21, 21, 12, 201 \\
&= 2(10, 10, 10, 100) \oplus 11, 11, 02, 011
\end{aligned}$$

In [O2, Chapter 8] and [O3, Chapter 7] the correspondence between the spectral type  $\mathbf{m} = (m_{j,\nu})$  and the roots  $\alpha$  of a star shaped Kac-Moody root system.

$$\alpha_{\mathbf{m}} = n\alpha_o + \sum_{j \geq 0} \left( \sum_{\nu > i} m_{j,\nu} \right) \alpha_{j,i}, \quad n = m_{j,1} + m_{j,2} + \dots \quad (\text{which do not depend on } j)$$

$$= n\alpha_0 + \sum_{j \geq 0} \sum_{\nu \geq 1} n_{j,\nu} \alpha_{j,\nu}$$

$$m_{j,\nu} = n_{j,\nu-1} - n_{j,\nu} \quad (j = 0, 1, \dots, \nu = 1, 2, \dots, n_{j,0} = n)$$

$$"11,11,11" \leftrightarrow \alpha = 2\alpha_0 + \alpha_{0,1} + \alpha_{1,1} + \alpha_{2,1}$$

$$"21,21,21,21" \leftrightarrow \alpha = 2\alpha_0 + \alpha_{0,1} + \alpha_{1,1} + \alpha_{2,1} + \alpha_{3,1}$$


$$"31,31,22,211" \leftrightarrow \alpha = 4\alpha_0 + \alpha_{0,1} + \alpha_{1,1} + 2\alpha_{2,1} + 2\alpha_{3,1} + \alpha_{3,2}$$

$$(\alpha|\alpha) = 2 \quad (\alpha \in \Pi := \{\alpha_0, \alpha_{j,\nu} \mid j \geq 0, \nu > 0\})$$

$$(\alpha_0|\alpha_{j,\nu}) = -\delta_{\nu,1}$$

$$(\alpha_{i,\mu}|\alpha_{j,\nu}) = \begin{cases} 0 & (i \neq j \text{ or } |\mu - \nu| > 1) \\ -1 & (i = j \text{ and } |\mu - \nu| = 1) \end{cases}$$

$$s_\alpha : x \mapsto x - (x|\alpha)\alpha \quad (\alpha \in \Pi)$$



In the case of the spectral type "11,11,11" of Gauss hypergeometric equation we have

$$\alpha_{\mathbf{m}} = 2\alpha_0 + \alpha_{0,1} + \alpha_{1,1} + \alpha_{1,2} = s_{\alpha_0} s_{\alpha_{2,1}} s_{\alpha_{1,1}} s_{\alpha_{0,1}}(\alpha_0) = w_{\mathbf{m}}^{-1}(\alpha_0),$$

$$w_{\mathbf{m}} = s_{\alpha_{0,1}} s_{\alpha_{1,1}} s_{\alpha_{2,1}} s_{\alpha_0},$$

$$\Delta(\mathbf{m}) = \{\alpha_0 + \alpha_{0,1}, \alpha_0 + \alpha_{1,1}, \alpha_0 + \alpha_{2,1}, \alpha_0\},$$

$$[\Delta(\mathbf{m})] := \{(\alpha|\alpha_{\mathbf{m}}) \mid \alpha \in \Delta(\mathbf{m})\} = \{1, 1, 1, 1\}$$

$$\leftrightarrow 4 = 1 + 1 + 1 + 1 : 1^4$$

The `height` equals  $2 + 1 + 1 + 1 = 5$ . In the rigid case  $[\Delta(\mathbf{m})]$  is the partition of the natural number `height` – 1 and in this case it is  $4 = 1 + 1 + 1 + 1$ . Moreover the second and third numbers

of the 3rd element of the list

```
[[1,2,1],[1,1,1],[1,0,1],[1,0,0]]
```

given by **base** mean

$$w_{\mathbf{m}}^{-1} = s_{\alpha_{2,1}} s_{\alpha_{1,1}} s_{\alpha_{0,1}} s_{\alpha_0}$$

and the first numbers show the differences of **height** under the simple reflections.

In general if  $w_{\mathbf{m}} = s_{\alpha_{i_0}} s_{\alpha_{i_1}} \cdots s_{\alpha_{i_K}}$ , we have

$$\Delta(\mathbf{m}) = \{s_{\alpha_{i_0}} \cdots s_{\alpha_{i_{\nu-1}}} (\alpha_{i_\nu}) \mid \nu = 0, \dots, K\}$$

and moreover if  $\mathbf{m}$  is rigid,  $w_{\mathbf{m}} \alpha_{\mathbf{m}} = \alpha_0$ . Here  $w_{\mathbf{m}}$  is the unique element with the minimal length ( $= K$ ) of the Weyl group (which is generated by simple reflections  $s_\alpha$  ( $\alpha \in \Pi$ )). Note that  $m_{j,\nu}$  is normalized by the condition  $m_{j,1} \geq m_{j,2} \geq \dots$  and  $i_0 = 0$ .

```
/* Get all the decompositions of Type 2 and Type 3 of spectral types with rank 8
 which have more than three singular points */
[12] Rank=8; /* give rank */
[13] G=os_md.spgen(Rank|eq=1,str=1,pt=[4,100]); /* get spectral types */
[14] for(T=G;T!=[];T=cdr(T))
 if((os_md.sproot(car(T),"pairs"|only=6))!=[]) /* only type 2, 3 */
 os_md.sproot(os_md.s2sp(car(T)|std=-1), /* in standard order */
 "pairs"|only=6,dviout=1);
```

### 51. spbasic( $k, d | str=1, pt=[k, \ell]$ )

:: Returns the list of fundamental spectral types with rank  $d$  whose index of rigidity equals  $k$

- $k : 0$  or a negative integer
- $d = 0$  means the list without the restriction of the rank
- $pt=[k, \ell]$  means that the number of singular points (partitions) is greater than or equal to  $k$  and less than or equal to  $\ell$ .
- $pt=k$  means  $pt=[k, k]$ .

The required spectral types correspond to  $\{m_{j,\nu}\}$  in the identity

$$\left( \sum_{j=0}^{p-1} (\text{ord } \mathbf{m} - m_{j,1}) - 2 \cdot \text{ord } \mathbf{m} \right) \text{ord } \mathbf{m} + \sum_{j=0}^{p-1} \left( \sum_{\nu=1}^{n_j} (m_{j,1} - m_{j,\nu}) m_{j,\nu} \right) = -\text{idx } \mathbf{m}$$

with the condition  $m_{j,1} \geq m_{j,2} \geq \dots$ ,  $\mathbf{m}_1 \geq \mathbf{m}_2 \geq \dots$  and the first terms of the left hand side of this identity is non-negative.

We get the required spectral types in the lexicographic order from the larger ones. Here we note

$$0 \leq \left( \sum_{j=0}^{p-1} (\text{ord } \mathbf{m} - m_{j,1}) - 2 \cdot \text{ord } \mathbf{m} \right) \text{ord } \mathbf{m} \leq |\text{idx } \mathbf{m}|$$

If  $\text{ord } \mathbf{m} > |\text{idx } \mathbf{m}|$ , then  $\sum_{j=0}^{p-1} (\text{ord } \mathbf{m} - m_{j,1}) = 2 \cdot \text{ord } \mathbf{m}$ .

In particular

$$p \leq \frac{1}{2} |\text{idx } \mathbf{m}| + 4, \quad \text{ord } \mathbf{m} \leq 3|\text{idx } \mathbf{m}| + 6, \quad \text{ord } \mathbf{m} \leq |\text{idx } \mathbf{m}| + 2 \quad (p > 3).$$

Moreover if  $\text{ord } \mathbf{m} > |\text{idx } \mathbf{m}| + 2$ , then  $p = 3$  and  $m_{0,1} + m_{1,1} + m_{2,1} = \text{ord } \mathbf{m}$ .

Hence we put

$$L = \begin{cases} \frac{1}{2}|\text{idx } \mathbf{m}| + 4 & (\text{ord } \mathbf{m} \leq \text{idx } \mathbf{m} + 2) \\ 3 & (\text{ord } \mathbf{m} > \text{idx } \mathbf{m} + 2) \end{cases},$$

$$Si(p) = \sum_{j=0}^{p-1} (\text{ord } \mathbf{m} - m_{j,1}) - 2\text{idx } \mathbf{m}, \quad Sv(p) = \sum_{j=0}^{p-1} \left( \sum_{\nu \geq 1} (m_{j,1} - m_{j,\nu}) m_{j,\nu} \right)$$

and check the conditions

$$p < L, \quad Si(p) \geq 0, \quad Sv(p) \leq |\text{idx } \mathbf{m}|, \quad Si(p) \cdot \text{ord } \mathbf{m} + Sv(p) = |\text{idx } \mathbf{m}|$$

for the spectral types (cf. [Osp]).

| rigidity index  | 0 | -2 | -4   | -6   | -8   | -10  | -12  | -14  | -16  | -18  | -20  | -22  |
|-----------------|---|----|------|------|------|------|------|------|------|------|------|------|
| runtime (sec)   |   |    | 0.02 | 0.05 | 0.09 | 0.19 | 0.33 | 0.58 | 1.03 | 1.70 | 2.67 | 4.25 |
| total number    | 4 | 13 | 37   | 69   | 113  | 198  | 291  | 415  | 647  | 884  | 1186 | 1682 |
| 3 singular pts. | 3 | 9  | 25   | 46   | 73   | 127  | 182  | 249  | 395  | 522  | 680  | 963  |
| 4 singular pts. | 1 | 3  | 9    | 17   | 29   | 50   | 76   | 115  | 172  | 243  | 345  | 478  |

```
[0] os_md.spbasic(-2,0);
[[[1,1],[1,1],[1,1],[1,1],[1,1],[[2,1],[2,1],[1,1,1],[1,1,1]],...
[1] tstart$os_md.mycat(length(os_md.spbasic(-10,0)))$tstop$
198
[2] 0.1875sec + gc : 0.03125sec(0.219sec)
```

The time for the calculation to get the list is given under Let's Note CF-SZ5 (i7-6500U), 2016.

We get the list of spectral types with a given index of rigidity by

```
[0] Idx=-4; Column=4; /* Put the rigidity index */
[1] Ord=6-3*Idx; Sp="\\,\\ ";
V=newvect(Ord+1);V[0]=V[1]=[];
[2] for(I=2;I<=Ord;I++) V[I]=os_md.spbasic(Idx,I|str=1);
for(R=[],I=0;I<10;I++){T=Sp+rtosrt(I)+"\\,";
for(TL=V[I];TL!=[];TL=cdr(TL)) R=cons(T+car(TL),R);}
for(I=10;I<=Ord;I++){T=rtosrt(I)+"\\,";
for(TL=V[I];TL!=[];TL=cdr(TL)) R=cons(T+car(TL),R);}
[3] R=reverse(R);
Title="idx=$"+rtosrt(Idx)+"\\ (Pidx="+rtosrt((2-Idx)/2)
+"\\ "+rtosrt(length(R))+ " fundamental tuples";
[4] S=os_md.ltotex([R]|opt="tab",width=Column, align="l",title=Title);
dvout(S);
```

The above [2] may be replaced by the following to get spectral types arranged according to the numbers of singularities.

```
[2] for(I=2;I<=Ord;I++) V[I]=os_md.spbasic(Idx,I);
for(S=[],I=2;I<=Ord;I++)
for(TL=V[I];TL!=[];TL=cdr(TL)) S=cons([length(car(TL)),I,car(TL)],S);
S=qsort(S);
for(R=[],TS=S;TS!=[];TS=cdr(TS)){N=(P=car(TS))[1];
```

```

if(N<10) T= Sp+rtosstr(N)+"\\\,";
else T=rtosstr(N)+"\\\,";
R=cons(T+os_md.s2sp(P[2]),R);
}

52. sp2grs(m,a,ℓ|mat=1)
:: Generates generalized Riemann scheme with a given spectral type
• The inverse transformation is given by chkspt() with the option opt="sp".
• The $j + 1$ -th spectral parameter in the $i + 1$ -th singular point is a_{ij} (resp. $a[i]j$) if a is a variable (resp. a list), where a or $a[i]$ may be a string.
• When ℓ is a list $[\ell_1, \ell_2]$, ℓ_2 -th exponent of ℓ_1 -th singular point is determined by Fuchs relation. If the exponent is zero, another exponent is arranged.
• When ℓ is a positive integer, a_{ij} is changed into $a_{ij} + k$ or $a[i]j + k$. If the above indication is also necessary, we indicate $\ell = [\ell_1, \ell_2, k]$.
• When ℓ is a negative integer $-1 - k$, some exponents are set to 0 in a standard way together with the above k shift of indices.
• mat=1 means the Schleginger type (which has a different Fuchs relation)

[0] os_md.sp2grs([[1,1],[1,1],[1,1]],a,0);
[[[1,a00],[1,a01]],[[1,a10],[1,a11]],[[1,a20],[1,a21]]]
[1] M=os_md.sp2grs("111,111,21",[a,b,c],[3,2]);
[[[1,a0],[1,a1],[1,a2]],[[1,b0],[1,b1],[1,b2]],[[2,c0],
[1,-b1-b2-a2-a1-2*c0-b0-a0+2]]]
[2] os_md.sp2grs([[1,1,1],[1,1,1],[2,1]],[a,b,c],[3,2,-2]);
[[[1,a1],[1,a2],[1,a3]],[[1,b1],[1,b2],[1,0]],[[2,0],
[1,-b1-b2-a3-a2-a1+2]]]
[3] subst(M,b0,0,b1,1-b1,b2,1-b2,c0,0);
[[[1,a0],[1,a1],[1,a2]],[[1,0],[1,-b1+1],[1,-b2+1]],[[2,0],
[1,b1+b2-a2-a1-a0]]]
[4] os_md.sp2grs([[1,1],[1,1],[1,1]],a,1);
[[[1,a01],[1,a02]],[[1,a11],[1,a12]],[[1,a21],[1,a22]]]
[5] os_md.ssubgrs(M,"110,110,11");
-b2-a2-c0+2
[6] os_md.ssubgrs(M,[[1,1,0],[1,1,0],[1,1]]);
-b2-a2-c0+2

53. ssubgrs (m,ℓ)

54. mcgrs(m,[r1,r2,...,rn]|mat=1,s1m=[[k1,k2,...],m'])
:: Applies middle convolutions and additions successively to a generalized Riemann scheme or a sum of residue matrices
• If r_j is a scalar, it means a middle convolution mc_{r_j} . If r_j is a list $[r_{j,1}, \dots, r_{j,n}]$, it means additions. If r_j is a list $[r_{j,0}, r_{j,1}, \dots, r_{j,n}]$, it means that a middle convolution $mc_{r_{j,0}}$ is applied first and then the additions corresponding to $[r_{j,1}, \dots, r_{j,n}]$ are applied. Firstly r_n is applied to p and then ar_{n-1} to its result,..., and r_1 is lastly applied.
• We indicate mat=1 if the Riemann scheme is of Schlesinger type.
If s1m= is indicated, the transformation of the spectral type of sum m' of k_1, k_2, \dots -th residue matrices. This enables us to know the semi-local monodromy and the monodromy of the corresponding confluent singular point (cf. [O7]).
```

```

[1] M0=[[1,0]]$M=[M0,M0,M0,M0]$S=[m,[a,b,c]]$
[2] os_md.mcgrs(M,S);
[[[2,-m+1],[1,-a-b-c-m]],[[2,0],[1,a+m]],[[2,0],[1,b+m]],[[2,0],[1,c+m]]]
[3] os_md.mcgrs(M,S|mat=1);
[[[2,-m],[1,-a-b-c-m]],[[2,0],[1,a+m]],[[2,0],[1,b+m]],[[2,0],[1,c+m]]]
[4] os_md.mcgrs(M,S|mat=1,slm=[[0,1],M0]);
[[[[2,-m],[1,-a-b-c-m]],[[2,0],[1,a+m]],[[2,0],[1,b+m]],[[2,0],[1,c+m]]],
 [[1,0],[1,-m],[1,-b-c-m]]]

55. mcop(p,[r1,r2,...,rn],[x,x1,x2,...])
:: Applies middle convolutions and additions successively to a (partial) differential operator p
• [x,x1,x2,...] : x is the variable, x1,x2,... are singular points.
• [r1,r2,...] : rj = [rj,0,rj,1,...,rj,ν,...] is the j-th operation of a middle convolution and
additions at xν
– Apply the middle convolution mcrj,0 and after that apply the additions at x = xν (corre-
sponding to the gage transformation of a function u to (x - xν)rj,νu (ν = 1, 2,...).
– Apply the transformation described by rj to p in the order r1, r2,...
– dx : represents $\frac{d}{dx}$ (or $\frac{\partial}{\partial x}$).

[0] R=os_md.getbygrs("21,21,21,21","construct")$
[1] R[0][1];
[[[1,b+c+d+a1+2*a0-2]],[[1,0]],[[1,0]],[[1,0]]]
[2] S=os_md.lsol(os_md.getbygrs("21,21,21,21","Fuchs"),a1);
-b-c-d-2*a0+2
[3] R=subst(R,a1,S,a0,a);
[[0,[[[1,0]],[[1,0]],[[1,0]],[[1,0]]]],
[[0,a+b-1,a+c-1,a+d-1],[[[1,-3*a-b-c-d+3]],[[1,a+b-1]],[[1,a+c-1]],[[1,a+d-1]]]],
[[[-a+1,0,0,0],[[[2,a],[1,-2*a-b-c-d+2]],[[2,0],[1,b]],[[2,0],[1,c]],[[2,0],[1,d]]]]]
[4] RR=[R[1][0],R[2][0]];
[[0,a+b-1,a+c-1,a+d-1],[-a+1,0,0,0]]
[5] os_md.mcop(dy,RR,[x,0,1,y]);
((-x+y)*dx-a)*dy+(-a-d+1)*dx
[6] os_md.show(@@)$

```

$$-(x-y)\partial_x\partial_y - (a+d-1)\partial_x - a\partial_y$$

56. redgrs(m|mat=1)

:: Returns 1-step reduction of generalized Riemann scheme of Fuchsian differential equation  
Returns [redsp, m'].

If the reduction is not possible, it returns non-negative integer (basic, 0 means rigid) or negative number (in the case of the non-existence of the operator)

57. getbygrs(m,t|perm=ℓ,var=v,pt=[p<sub>1</sub>,...],mat=1) or  
getbygrs(m,[t,s<sub>1</sub>,s<sub>2</sub>,...]|perm=ℓ,var=v,pt=[p<sub>1</sub>,...],mat=1)

:: Analyzes Fuchsian ODE defined by generalized Riemann scheme (GRS) (GRS may be given in a short form or a spectral type)

- mat=1 : Schleginger form
- getbygrs(0,0) : parameter is shown (for help)
- The number of the elements of m which we put p+1 corresponds to the number of the singular points denoted by x<sub>0</sub> = ∞, x<sub>1</sub> = 0, x<sub>2</sub> = 1, x<sub>3</sub>, ..., x<sub>p</sub>.

- The generalized exponents of a Fuchsian equation at  $x = x_j$  are  $\{[\lambda_0]_{(n_0)}, \dots, [\lambda_k]_{(n_k)}\}$  if the exponents are  $\{\lambda_j + \nu; 0 \leq \nu < n_j, j = 0, \dots, k\}$  including their multiplicities and if any difference of the elements  $\{\lambda_0, \dots, \lambda_k\}$  is not an integer (otherwise we will not give the definition here but for example when all  $\lambda_j$  are same, then the sizes of Jordan blocks of the corresponding local monodromy matrix correspond to the dual partition of  $n = n_0 + \dots + n_k$   $x = x_j$  is semisimple (diagonalizable), namely, there exist local solutions  $(x - x_j)^{\lambda_j + \nu} \phi_{j,\nu}(x)$  ( $0 \leq \nu < n_\nu$ ) ( $\phi_{j,\nu}(x)$  are holomorphic at  $x = x_j$  and  $\phi_{j,\nu}(x_j) = 1$ ).
- Generalized Riemann scheme (GRS) is the table of generalized exponents at the  $p+1$  singular points (cf. [O2, Chapter 5], [O3, Definition 4.6]) :

$$\left\{ \begin{array}{ll} x = \infty & x_j \quad (j = 1, \dots, p) \\ \begin{matrix} [m[0][0][1]]_{(m[0][0][0])} & [m[j][0][1]]_{(m[j][0][0])} \\ [m[0][1][1]]_{(m[0][1][0])} & [m[j][1][1]]_{(m[j][1][0])} \\ \vdots & \vdots \\ [m[0][i][1]]_{(m[0][i][0])} & [m[j][i][1]]_{(m[j][i][0])} \\ \vdots & \vdots \end{matrix} & ; x \end{array} \right\}$$

- `perm=[[i, j]]` : transposition of  $i$ -th singular point and  $j$ -th singular point
- `perm=[j_0, ..., j_p]` : permutation of singular points ( $x_{j_0}$  corresponds to  $\infty$ ).
- `var=v` : return the variable of exponents. (cf. the second parameter of `sp2grs()`).
- `pt=[p_1, p_2, ...]` : the singular points are  $\infty, p_1, p_2, \dots$
- One of the exponent of Generalize Riemann scheme  $m$  may not be indicated by "?". The is is determined by Fuchs relation.
- When  $m$  is a spectral types (a tuple of partitions), it is replaced to the corresponding GRS. If  $s = "general"$  is indicated in the above case, the exponents are general. Otherwise some exponents are 0 and the GRS may be Okubo type or a close one.

Put  $R = \text{getbygrs}(m, t)$ .

The option parameter  $s$  is a string of a list of strings. "TeX", "dviout", "keep" can be indicated in the following cases.

- $t = "\text{reduction}"$  or 0 : reduction to the basic equation  
"top0" can be indicated when  $s = "\text{TeX}"$  is indicated.  
 $R[i][0]$  : the  $i$ -th reduction are as follows ( $i = 1, 2, \dots$ )  
the additions at  $x_\nu$  with the parameters  $R[i][0][\nu]$  for  $\nu = 1, \dots, p$  and then the middle convolution with the parameter  $R[i][0][0]$ .  
 $R[i][1]$  : the GRS obtained by the above reduction  
 $R[0][1]$  : the original GRS
- $t = "\text{construct}"$  or 1 : construction of the equation and integral representation of the solution  $R[0][1]$ : GRS of the basic equation obtained by the reduction (we denote it by  $\mathbf{m}'$ ).  
By  $\text{RAD}(\prod_{\nu=1}^p (x - x_\nu)^{R[i][0][\nu]}) \circ mc_{R[i][0][0]}$  the GRS is changed from  $R[i-1][1]$  to  $R[i][1]$  ( $i = 1, 2, \dots$ ) and the corresponding transformation of  $\mathbf{m}'$  into  $\mathbf{m}$  is given.  
 $s = "\text{short}"$  can be indicated  
 $s = "\text{TeX}"$  means the integral representation of the solution (in TeX) corresponding to a multiplicity one exponent of the local monodromy at  $x = x_1$  ( $x_1 = 0$  in default).
- $t = "\text{connection}"$  or 2 : the connection coefficient  
 $s = "\text{simplify}"$  can be indicated  
When the number of singular points is  $p+1$ , they are  $x_0 = \infty, x_1 = 0, x_2 = 1, x_3, x_4, \dots, x_p$  by default. When the GRS is as given and the multiplicities of the last exponents at  $x = 0$  and  $x = 1$  are 1, the connection coefficient of the corresponding normalized local solution at

$x = 0$  to that of  $x = 1$  is given by

$$c_B \frac{\prod_{\nu} \Gamma(R[0][\nu])}{\prod_{\nu} \Gamma(R[1][\nu])} \prod_{j \geq 3} (1 - x_j^{-1})^{R[2][j]}$$

Here  $c_B$  is the corresponding connection coefficient of the basic equation. When the equation is rigid (it has no accessory parameter), then  $c_B = 0$ . Note that the terms  $(1 - x_j^{-1})^{R[2][j]}$  do not exist when the number of the singular points is 3.

- $t = \text{"operator"}$  or 3 : get the equation  
 $s = \text{"simplify"}$  may be indicated  
 $x$  is the variable  $x$  and  $dx$  means  $\frac{d}{dx}$  in the result  
The accessory parameters are expressed by  $\text{ri\_j}$  and they correspond to coefficient of certain  $x^j \frac{d^i}{dx^i}$ .  
This calculation is heavier than other calculations and the result may be long.
- $t = \text{"series"}$  or 4 : The local solution in the power series corresponding to the last exponent at  $x = 0$ . The multiplicity of the exponent should be 1.  
 $R = [R_0, R_1, R_2]$   
 $R_0 = [[R_{00}, [R_{01}, T_1], [R_{02}, T_2], \dots], [P_1, Q_1], [P_2, Q_2], \dots]$   
 $R_1 = [[R_{100}, P_{101}, P_{102}, \dots], [R_{110}, P_{111}, P_{112}, \dots], \dots]$   
 $R_2 = [[R_{200}, P_{201}, P_{202}, \dots], [R_{210}, P_{211}, P_{212}, \dots], \dots]$   
 $0 \leq P_1 < P_2 < P_3 < \dots$

$$\sum_{n_{P_1}, n_{P_2}, \dots} C_{n_0} x^{R_{00} + n_0} \prod_{j \geq 0, P_j \neq 0} \left( \frac{x}{x_{Q_j}} \right)^{n_{P_j}} \\ \cdot \prod_{j \geq 1} \left( 1 - \frac{x}{x_{T_j}} \right)^{R_{0j}} \frac{\prod_{j \geq 0} (R_{1j0})_{n_{P_{1j1}} + n_{P_{1j2}} + \dots}}{\prod_{j \geq 0} (R_{2j0})_{n_{P_{2j1}} + n_{P_{2j2}} + \dots}}, \\ x_1 = x_2 = 1, \\ P_1 \neq 0 \Rightarrow n_0 = 0 \text{ and } C_0 = 1.$$

- $t = \text{"TeX"}$  or 5 : give GRS in L<sup>A</sup>T<sub>E</sub>X  
 $s = \text{"top0"}$  : indicate that  $x = \infty$  is the last in GRS
- $t = \text{"Fuchs"}$  or 6 : get Fuchs relation
- $t = \text{"All"}$  or 7 : only valid when "dviout" is indicated in  $s$ . Several related results are displayed using dviout(). If "irreducible" is indicated in  $s$ , the condition for the irreducibility is omitted. If "operator" is indicated in  $s$ , the differential operator is shown.
- $t = \text{"basic"}$  or 8 : get the corresponding basic GRS  
 $s = \text{"short"}$  may be indicated
- $t = \text{"}$  or 9 : get GRS  
 $s = \text{"short"}$  indicates the short form
- $t = \text{"irreducible"}$  or 10 : get the condition for the irreducibility  
 $s = \text{"simplify"}$  may be indicated  
The condition for the irreducibility equals that the any value of the linear form in the resulting list is not an integer (with the condition for the irreducibility of the resulting basic equation if the equation is not rigid).
- $t = \text{"recurrence"}$  or 11 : adjacent relation in three terms This is only valid when the number of singular points are three (0, 1,  $\infty$ ) and the multiplicities of the last exponent of the three singularities are 1.

The result is the shift of the local normalized solution with the last exponent at the origin.

$s$  is a string or a list of string. The string are

- "simplify" : simplify the result using the Fuchs relation
- "TeX" : the result is given in L<sup>A</sup>T<sub>E</sub>X
- "dviout" : the result is displayed by dviout  
In this case we can indicate a title by the option parameter `title=`
- "keep" : same as above but the result is not displayed (only a file in T<sub>E</sub>Xis created).
- "short" : GRS is a short format
- "general" : exponents are fully generic according to the spectral type
- "x1" : the singular points are  $\infty, x_1, x_2, \dots$  (only valid for GRS in T<sub>E</sub>Xand the differential operator)
- "x2" : the singular points are  $\infty, 0, x_2, \dots$  (only valid for GRS in T<sub>E</sub>Xand the differential operator)
- "top0" :  $\infty$  is the last in GRS in T<sub>E</sub>X.
- "sht" : the suffices of exponents start from 1 (0 by default) automatically generated from the given spectral type

```
[1] M=os_md.sp2grs([[1,1,1],[1,1,1],[2,1]],[a,b,c],[3,2]);
[[[1,a0],[1,a1],[1,a2]],[[1,b0],[1,b1],[1,b2]],[[2,c0],
[1,-2*c0-b2-b1-b0-a2-a1-a0+2]]]
[2] os_md.getbygrs(M,"reduction");
[
[0,
[[1,a0],[1,a1],[1,a2]],
[[1,b0],[1,b1],[1,b2]],
[[2,c0],[1,-2*c0-b2-b1-b0-a2-a1-a0+2]]
]
],
[[0 0 0],
[[0,-c0-b0-a0+2],[1,a1-a0+1],[1,a2-a0+1]],
[[0,0],[1,c0+b1+a0-1],[1,c0+b2+a0-1]],
[[1,0],[1,-2*c0-b2-b1-a2-a1+1]]
]
],
[[1 1 0],
[[0,-c0-b0-a1+2],[0,-c0-b1-a1+2],[1,a2-a1+1]],
[[0,a1-a0],[0,0],[1,c0+b2+a1-1]],
[[0,0],[1,-c0-b2-a2]]
]
],
[3] os_md.getbygrs(M,"construct");
[
[[0,
[[1,0]],
[[1,0]],
[[1,0]]]
]
```

```

]
[[0,c0+b2+a1-1,-c0-b2-a2]
 [[[1,a2-a1+1]],,
 [[1,c0+b2+a1-1]],,
 [[1,-c0-b2-a2]]]
]
],
[[-c0-b1-a1+1,c0+b1+a0-1,0],
 [[[1,a1-a0+1],[1,a2-a0+1]],,
 [[1,c0+b1+a0-1],[1,c0+b2+a0-1]],,
 [[1,0],[1,-2*c0-b2-b1-a2-a1+1]]]
]
],
[[-c0-b0-a0+1,b0,c0],
 [[[1,a0],[1,a1],[1,a2]],,
 [[1,b0],[1,b1],[1,b2]],,
 [[2,c0],[1,-2*c0-b2-b1-b0-a2-a1-a0+2]]]
]
]
]
[4] os_md.getbygrs(M,"connection");
[[3*c0+b2+b1+b0+a2+a1+a0-2,b2-b1+1,b2-b0+1],
 [c0+b2+a2,c0+b2+a1,c0+b2+a0],
 [0 2*c0+b2+b1+b0+a1+a0-2 -b2-a2]]
[5] os_md.getbygrs(M,["construct","TeX"])$
x^{b_{\{0\}}}(1-x)^{c_0}
\int_c^x(x-s_0)^{c_0+b_0+a_0}ds_0
s_0^{c_0+b_1+a_0-1}
\int_c^{s_0}(s_0-s_1)^{c_0+b_1+a_1}
s_1^{c_0+b_2+a_1-1}
(1-s_1)^{-c_0-b_2-a_2}ds_1
[6] M0=subst(M,b2,0,c0,0,b1,1-b1,b0,1-b0);
[
[[1,a0],[1,a1],[1,a2]],,
[[1,-b0+1],[1,-b1+1],[1,0]],,
[[2,0],[1,b1+b0-a2-a1-a0]]]
]
[7] os_md.getbygrs(M0,"connection");
[[b1,-b1-b0+a2+a1+a0,b0],
 [a2,a1,a0],
 [0 -b1-b0+a1+a0 -a2]]
[8] P=os_md.getbygrs(M0,"operator");
(x^3-x^2)*dx^3+((a1+a0+a2+3)*x^2+(-b1-b0-1)*x)*dx^2+
(((a0+a2+1)*a1+(a2+1)*a0+a2+1)*x-b0*b1)*dx+a2*a0*a1

```

```

[9] os_md.expat(P,x,"?");
[[0,[-b1+1,-b0+1,0]],[1,[b1+b0-a1-a0-a2,1,0]], [infty,[a1,a0,a2]]]
[10] os_md.getbygrs(M0,"irreducible");
[b1-a1,b1-a2,a1,a2,b0-a0,b0-a2,b0-a1,a0,b1-a0]
[11] M1=os_md.sp2grs([[1,1,1],[1,1,1],[2,1]],[a,b,c],[]);
[[[1,a0],[1,a1],[1,a2]],[[1,b0],[1,b1],[1,b2]],[[2,c0],[1,c1]]]
[12] M2 = subst(M1,b0,1-b0,b1,1-b1,b2,0,c0,0,c1,-c1);
[[[1,a0],[1,a1],[1,a2]],[[1,-b0+1],[1,-b1+1],[1,0]],[[2,0],[1,-c1]]]
[13] os_md.getbygrs(M2,"connection");
[[c1,b1,b0],[c1+b1+b0-a1-a0,a1,a0],[0 -b1-b0+a1+a0 -c1-b1-b0+a1+a0]]
[14] os_md.getbygrs(M2,['connection',"simplify"]);
[[c1,b1,b0],[a2,a1,a0],[0 c1-a2 -a2]]
[15] os_md.getbygrs(M2, "Fuchs");
-c1-b1-b0+a2+a1+a0
[16] os_md.getbygrs(M2, "TeX")$

P\begin{Bmatrix}

x=\infty & 0 & 1\\
& -b_0+1 & [0]_{(2)} & \!\\
& -b_1+1 & -c_1\\
& 0 & \\
\end{Bmatrix}

[17] os_md.getbygrs(M2,['connection',"simplify","TeX"])$

c(0:0 \rightsquigarrow 1: -c_1)=\frac{

\Gamma(c_1)\\
\Gamma(b_1)\\
\Gamma(b_0)\\
}{

\Gamma(a_2)\\
\Gamma(a_1)\\
\Gamma(a_0)\\
}

[18] os_md.getbygrs(M2, ["Fuchs","TeX"]);
-c_1-b_1-b_0+a_2+a_1+a_0
[19] os_md.getbygrs([[1,1],[1,1],[1,1]],"operator");
(-x^2+x)*dx^2+((c1+b0-2)*x-b0+1)*dx+a0*c1+a0*b0+a0^2-a0
[20] H0=[[1,1,1],[2,1],[2,1],[2,1]]$

[21] os_md.getbygrs(H0,"","");
[[a0,a1,a2],[[2,0],b1],[[2,0],c1],[[2,0],d1]]
[22] os_md.getbygrs(H0,"TeX");
P\begin{Bmatrix}

x=\infty & 0 & 1& x_3\\
& [0]_{(2)} & [0]_{(2)} & [0]_{(2)}&\!\\
& a_1& b_1& c_1& d_1\\
& a_2& & &
\end{Bmatrix}

```

```

\end{Bmatrix}
[23] os_md.getbygrs(H0,["basic","short"]);
[[b1+a1,b1+a2],[-b1-a0+1,0],[0,c1+a0-1],[0,a0+d1-1]]
[24] os_md.getbygrs(H0,[],"short","general");
[[a0,a1,a2],[[2,b0],b1],[[2,c0],c1],[[2,d0],d1]]
[25] os_md.getbygrs(H0,["basic","TeX"]);
P\begin{Bmatrix}
x=\infty & 0 & 1 & \\
b_1+a_1 & -b_1-a_0+1 & 0 & 0&\!\!;!\\
b_1+a_2 & 0 & c_1+a_0-1 & a_0+d_1-1\\
\end{Bmatrix}
\end{Bmatrix}
[26] os_md.getbygrs(H0,"Fuchs");
b1+c1+a1+a0+d1+a2-3
[27] P=os_md.getbygrs(H0,"operator");
(-x^3+(x_3+1)*x^2-x_3*x)*dx^3+((-a1-a0-a2-3)*x^2+(-x_3*b1+(-x_3+1)*c1+a1+a0+a2
+4*x_3+1)*x+x_3*b1-2*x_3)*dx^2+((-a0-a2-1)*a1+(-a2-1)*a0-a2-1)*x-b1^2+((x_3-1)*c1
-a1-a0-a2-2*x_3+2)*b1+(-x_3+1)*c1+a1+a0+a2+2*x_3-r0_0-1)*dx-a2*a0*a1
[28] os_md.expat(P,x,"?");
[[0,[b1,1,0]], [1,[c1,1,0]], [x_3,[-b1-c1-a1-a0-a2+3,1,0]],
[infty,[a1,a0,a2]]]

```

In the above example ([1]–[5]) we examine the generalized Riemann scheme

$$\mathcal{R} = P \left\{ \begin{array}{cccc} x = \infty & 0 & 1 & \\ a_0 & b_0 & [c_0]_{(2)} & ; \\ a_1 & b_1 & c_1 & \\ a_2 & b_2 & & \end{array} \right\}$$

with  $c_1 = -a_0 - a_1 - a_2 - b_0 - b_1 - b_2 - 2c_0 + 2$

whose spectral type is  $\mathbf{m} = 111, 111, 21$ . Then `getbygrs(m, 1)` shows that the equation  $Pu = 0$  with the GRS  $\mathcal{R}$  is given by

$$P = \text{RAd}(x^{b_0}(x-1)^{c_0}) \circ mc_{-a_0-b_0-c_0+1} \circ \text{RAd}(x^{a_0+b_1+c_0-1}) \\ \circ mc_{-a_1-b_1-c_0+1} \circ \text{RAd}(x^{a_1+b_2+c_0-1}(x-1)^{-a_2-b_2-c_0}) \partial_x$$

and the generalized Riemann scheme changes as follows

$$P \left\{ \begin{array}{cccc} x = \infty & 0 & 1 & \\ 0 & 0 & 0 & ; \\ & & & x \end{array} \right\} \\ \rightarrow \text{RAd}(x^{c_0+a_1+b_2-1}(x-1)^{-c_0-b_2-a_2}) \\ P \left\{ \begin{array}{ccccc} x = \infty & 0 & & 1 & \\ a_2 - a_1 + 1 & c_0 + b_2 + a_1 - 1 & -c_0 - b_2 - a_2 & ; & x \end{array} \right\} \\ \rightarrow \text{RAd}(x^{a_0+b_1+c_0-1}) \circ mc_{-a_1-b_1-c_0+1} \\ P \left\{ \begin{array}{ccccc} x = \infty & 0 & & 1 & \\ a_1 - a_0 + 1 & c_0 + b_1 + a_0 - 1 & & 0 & \\ a_2 - a_0 + 1 & c_0 + b_2 + a_0 - 1 & -2c_0 - b_2 - b_1 - a_2 - a_1 + 1 & ; & x \end{array} \right\}$$

$$\rightarrow \text{RAd}(x^{b_0}(x-1)^{c_0}) \circ mc_{-a_0-b_0-c_0+1}$$

$$P \left\{ \begin{array}{ll} x = \infty & 0 \\ a_0 & b_0 \\ a_1 & b_1 \\ a_2 & b_2 \end{array} \quad c_1 := -a_0 - a_1 - a_2 - b_0 - b_1 - b_2 - 2c_0 + 2 \quad ; \quad x \right\}.$$

Hence an integral representation of the solution is

$$u(x) = x^{b_0}(1-x)^{c_0} \int_c^x \int_c^{s_0} (x-s_0)^{a_0+b_0+c_0} s_0^{a_0+b_1+c_0-1} \\ \cdot (s_0-s_1)^{a_1+b_1+c_0} s_1^{a_1+b_2+c_0-1} (1-s_1)^{-a_2-b_2-c_0} ds_1 ds_0.$$

When  $c = 0$  or  $c = 1$  or  $c = \infty$ ,  $u(x)$  is a local solution at  $x = 0$  or  $x = 1$  or  $x = \infty$  corresponding to the exponent  $b_2$  or  $c_1$  or  $a_2$ , respectively. It corresponds to the local solution for *the last exponent with free multiplicity* at each singular point.

By `getbygrs(m, "connection")` we get the connection coefficient

$$c(0:b_2 \rightsquigarrow 1:c_1) = \frac{\Gamma(a_0 + a_1 + a_2 + b_0 + b_1 + b_2 + 3c_0 - 2) \prod_{\nu=0}^1 \Gamma(b_2 - b_\nu + 1)}{\prod_{\nu=0}^2 \Gamma(a_\nu + b_2 + c_0)}$$

$$= \frac{\Gamma(c_0 - c_1) \prod_{\nu=0}^1 \Gamma(b_2 - b_\nu + 1)}{\prod_{\nu=0}^2 \Gamma(a_\nu + b_2 + c_0)},$$

which corresponds to the local solution

$$x^{b_2}(1-x)^{c_0} {}_3F_2(a_0 + b_2 + c_0, a_1 + b_2 + c_0, a_2 + b_2 + c_0, 1 - b_0 + b_2, 1 - b_1 + b_2; x).$$

The calculation

```
[29] G=[[a,b],[1-c,0],[c-a-b,0]];
[
[a, b],
[-c+1, 0],
[-a-b+c,0]
]
[30] os_md.getbygrs(G,"operator");
(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-b*a
[31] os_md.getbygrs(G,"connection");
[[-a-b+c,c],[-a+c,-b+c],[0 -b -b]]
[32] os_md.getbygrs(G,["construct","TeX"]);
x^{{-c+1}}(1-x)^{{-a-b+c}}\int _c^x(x-s_0)^{{-b+1}}
s_0^{{-b+c-1}}(1-s_0)^{{-a-c}}ds_0
[33] os_md.getbygrs(G,"irreducible")
[b,a,b-c,a-c]
```

shows Gauss summation formula (cf. [31])

$$F(a, b, c; 1) = \frac{\Gamma(c - a - b)\Gamma(c)}{\Gamma(c - a)\Gamma(c - b)}$$

for the Gauss hypergeometric series

$$F(a, b, c; x) = \sum_{k=0}^{\infty} \frac{(a)(a+1) \cdots (a+k-1) \cdot b(b+1) \cdots (b+k-1)}{(c)(c+1) \cdots (c+k-1)k!} x^k,$$

which is a solution of the hypergeometric equation (cf. [30])

$$x(1-x)u'' + (c - (a+b+1)x)u' - abu = 0$$

corresponding to the Riemann scheme (cf. [29])

$$P \left\{ \begin{matrix} x = \infty & 0 & 1 \\ a & 0 & 0 \\ b & 1-c & c-a-b \end{matrix} ; x \right\}.$$

The equation is irreducible if and only if (cf. [33])

$$a, b, a-c, b-c \notin \mathbb{Z}.$$

[34] `os_md.getbygrs([[a1,a2,a3],[0,b1,b2],[[2,0],"?"]],["reduction","dviout","top0"]);`

gives the following with its source file in L<sup>A</sup>T<sub>E</sub>X:

$$\begin{aligned} & P \left\{ \begin{matrix} x = 0 & 1 & \infty \\ 0 & [0]_{(2)} & a_1 \\ b_1 & -b_1 - b_2 - a_3 - a_2 - a_1 + 2 & a_2 \\ b_2 & & a_3 \end{matrix} ; x \right\} \\ & \leftarrow \text{mc}_{-a_1+1} : P \left\{ \begin{matrix} x = 0 & 1 & \infty \\ b_1 + a_1 - 1 & 0 & a_2 - a_1 + 1 \\ b_2 + a_1 - 1 & -b_1 - b_2 - a_3 - a_2 + 1 & a_3 - a_1 + 1 \end{matrix} ; x \right\} \\ & \leftarrow \text{Ad}\left(x^{b_1+a_1-1}\right) \text{mc}_{-b_1-a_2+1} : P \left\{ \begin{matrix} x = 0 & 1 & \infty \\ b_2 + a_2 - 1 & -b_2 - a_3 & a_3 - a_2 + 1 \\ b_1 + a_1 - 1 & & \end{matrix} ; x \right\} \\ & \leftarrow \text{Ad}\left(x^{b_2+a_2-1}(1-x)^{-b_2-a_3}\right) : P \left\{ \begin{matrix} x = 0 & 1 & \infty \\ 0 & 0 & 0 \end{matrix} ; x \right\} \end{aligned}$$

[35] `os_md.getbygrs("11,11,11",["All","dviout","operator"]);`

gives the following with its source file in L<sup>A</sup>T<sub>E</sub>X:

Riemann scheme

$$P \left\{ \begin{matrix} x = \infty & 0 & 1 \\ a_0 & 0 & 0 \\ a_1 & b & c \end{matrix} ; x \right\}$$

Fuchs condition

$$b + c + a_1 + a_0 - 1$$

Connection formula

$$c(0:b \rightsquigarrow 1:c) = \frac{\Gamma(-c)\Gamma(b+1)}{\Gamma(b+a_0)\Gamma(b+a_1)}$$

Recurrence relation shifting the last exponents at  $\infty, 0, 1$

$$u_{0,0,0} - u_{+1,0,-1} = \frac{(b+1)}{(b+a_0)} u_{0,+1,-1}$$

Integral representation

$$\begin{aligned} & \int_p^x (x-s_0)^{-a_0} s_0^{-c-a_1} (1-s_0)^{-b-a_1} ds_0 \\ & \sim \frac{\Gamma(-a_0+1)\Gamma(b+a_0)}{\Gamma(b+1)} x^b \quad (p=0, x \rightarrow 0) \end{aligned}$$

Series expansion

$$\sum_{n \geq 0} \frac{(b+a_0)_n(b+a_1)_n}{(b+1)_n n!} x^{b+n}$$

Irreducibility  $\Leftrightarrow$  any value of the following linear forms  $\notin \mathbb{Z}$

$$\begin{array}{cc} a_0 & a_1 \\ c+a_0 & b+a_0 \end{array}$$

which correspond to the decompositions

$$\begin{aligned} 11,11,11 &= 10,10,01 \oplus 01,01,10 \\ &= 10,01,10 \oplus 01,10,01 \\ &= 01,10,10 \oplus 10,01,01 \\ &= 10,10,10 \oplus 01,01,01 \end{aligned}$$

Operator

$$-x(x-1)\partial^2 + ((b+c-2)x - b + 1)\partial - a_0 a_1$$

[36] os\_md.getbygrs([[2,e],f,g],[[2,0],a,b],[[2,0],c,d]],["All","top0","dviout"]);

gives

Riemann scheme

$$P\left\{\begin{matrix} x=0 & 1 & \infty \\ [0]_{(2)} & [0]_{(2)} & [e]_{(2)} \\ a & c & f \\ b & d & g \end{matrix}; x\right\}$$

Fuchs condition

$$a + b + c + d + 2e + f + g - 3$$

Connection formula

$$c(0:b \rightsquigarrow 1:d) = \frac{\Gamma(-d)\Gamma(c-d)\Gamma(b+1)\Gamma(-a+b+1)}{\Gamma(-d-e+1)\Gamma(b+e)\Gamma(b+c+e+g-1)\Gamma(b+c+e+f-1)}$$

Recurrence relation shifting the last exponents at  $\infty, 0, 1$

$$u_{0,0,0} - u_{+1,0,-1} = \frac{(b+1)(-a+b+1)}{(b+e)(b+c+e+f-1)} u_{0,+1,-1}$$

Integral representation

$$\begin{aligned} &\int_p^x \int_p^{s_0} (x-s_0)^{-e} s_0^{a+e-1} (1-s_0)^{c+e-1} (s_0-s_1)^{b+d+e+g-2} s_1^{b+c+e+f-2} (1-s_1)^{a+d+e+f-2} ds_1 ds_0 \\ &\sim \frac{\Gamma(-e+1)\Gamma(b+e)\Gamma(b+d+e+g-1)\Gamma(b+c+e+f-1)}{\Gamma(b+1)\Gamma(-a+b+1)} x^b \quad (p=0, x \rightarrow 0) \end{aligned}$$

Series expansion

$$\sum_{n_1 \geq 0, n_2 \geq 0} \frac{(-c-e+1)_{n_2} (b+c+e+g-1)_{n_1} (b+c+e+f-1)_{n_1} (b+e)_{n_1+n_2}}{(-a+b+1)_{n_1} (b+1)_{n_1+n_2} n_1! n_2!} x^{b+n_1+n_2}$$

Irreducibility  $\Leftrightarrow$  any value of the following linear forms  $\notin \mathbb{Z}$

$$\begin{array}{ccccccccc} g & f & e \\ d+e & c+e & b+e & a+e \\ b+c+e+f & a+d+e+f & a+c+e+g & a+c+e+f \end{array}$$

which correspond to the decompositions

$$\begin{aligned} 211, 211, 211 &= 110, 110, 101 \oplus 101, 101, 110 \\ &= 110, 101, 110 \oplus 101, 110, 101 \\ &= 101, 110, 110 \oplus 110, 101, 101 \\ &= 110, 110, 110 \oplus 101, 101, 101 \\ &= 100, 100, 001 \oplus 111, 111, 210 \\ &= 100, 100, 010 \oplus 111, 111, 201 \\ &= 100, 001, 100 \oplus 111, 210, 111 \\ &= 100, 010, 100 \oplus 111, 201, 111 \\ &= 001, 100, 100 \oplus 210, 111, 111 \\ &= 010, 100, 100 \oplus 201, 111, 111 \\ &= 2(100, 100, 100) \oplus 011, 011, 011 \end{aligned}$$

A non-rigid case:

```
[37] os_md.getbygrs("3111,3111,3111",["All","dviout"]);
```

shows

Riemann Scheme

$$P \left\{ \begin{matrix} x = \infty & 0 & 1 \\ [a_0]_{(3)} & [0]_{(3)} & [0]_{(3)} \\ a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{matrix} ; x \right\}$$

Basic Riemann Scheme

$$P \left\{ \begin{matrix} x = \infty & 0 & 1 \\ b_3 + c_1 + a_1 + a_0 - 1 & b_1 - b_3 & 0 \\ b_3 + c_1 + a_2 + a_0 - 1 & b_2 - b_3 & c_2 - c_1 \\ b_3 + c_1 + a_3 + a_0 - 1 & 0 & c_3 - c_1 \end{matrix} ; x \right\}$$

$$[[1, 1, 1], [1, 1, 1], [1, 1, 1]]$$

Fuchs condition

$$b_1 + b_2 + b_3 + c_3 + c_2 + c_1 + a_3 + a_2 + a_1 + 3a_0 - 6$$

Connection formula

$$\begin{aligned} &c(0:b_3 \rightsquigarrow 1:c_3) \\ &= \frac{\Gamma(-c_3)\Gamma(b_3 + 1)}{\Gamma(-c_3 - a_0 + 1)\Gamma(b_3 + a_0)} c_B(0:0 \rightsquigarrow 1:c_3 - c_1) \end{aligned}$$

Integral representation

$$\begin{aligned} & \int_p^x (x - s_0)^{-a_0} s_0^{b_3 + a_0 - 1} (1 - s_0)^{c_1 + a_0 - 1} u_B(s_0) ds_0 \\ & \sim \frac{\Gamma(-a_0 + 1)\Gamma(b_3 + a_0)}{\Gamma(b_3 + 1)} C_0 x^{b_3} \quad (p = 0, x \rightarrow 0) \end{aligned}$$

Series expansion

$$\sum_{n_0 \geq 0, n_1 \geq 0} \frac{(-c_1 - a_0 + 1)_{n_1} (b_3 + a_0)_{n_0 + n_1}}{(b_3 + 1)_{n_0 + n_1} n_1!} C_{n_0} x^{b_3 + n_0 + n_1}$$

Irreducibility  $\Leftrightarrow$  any value of the following linear forms  $\notin \mathbb{Z}$  + fundamental irreducibility

$$\begin{array}{cccccc} a_0 & a_1 & a_2 & a_3 \\ c_1 + a_0 & c_2 + a_0 & c_3 + a_0 & b_3 + a_0 & b_2 + a_0 & b_1 + a_0 \end{array}$$

which correspond to the decompositions

$$\begin{aligned} 3111, 3111, 3111 &= 1000, 1000, 0001 \oplus 2111, 2111, 3110 \\ &= 1000, 1000, 0010 \oplus 2111, 2111, 3101 \\ &= 1000, 1000, 0100 \oplus 2111, 2111, 3011 \\ &= 1000, 0001, 1000 \oplus 2111, 3110, 2111 \\ &= 1000, 0010, 1000 \oplus 2111, 3101, 2111 \\ &= 1000, 0100, 1000 \oplus 2111, 3011, 2111 \\ &= 0001, 1000, 1000 \oplus 3110, 2111, 2111 \\ &= 0010, 1000, 1000 \oplus 3101, 2111, 2111 \\ &= 0100, 1000, 1000 \oplus 3011, 2111, 2111 \\ &= 3(1000, 1000, 1000) \oplus 0111, 0111, 0111 \end{aligned}$$

Here the equation  $Pu = 0$  with a non-rigid Riemann scheme is reduced to a basic equation  $P_B u_B = 0$  by middle convolutions and additions.

The connection coefficients, an integral representation, a local solution in a power series of the equation are expressed as above by the connection coefficients  $c_B$ , an solution  $\sum_{n_0=0}^{\infty} C_{n_0} x^{b_3 + n_0}$  of the solution  $u_B(x)$  of  $P_B u_B = 0$ . The fundamental irreducibility is the condition of irreducibility of the equation  $P_B u_B = 0$ .

$P_B$  is calculated by `mcop()` for a given differential operator  $P$ .

```
[38] os_md.getbygrs([[0,a,b],[[2,"?"],0],[d,e,f]],[""]|mat=1);
[[[1,0],[1,a],[1,b]],[[2,-1/2*a-1/2*b-1/2*d-1/2*e-1/2*f],[1,0]],[[1,d],[1,e],[1,f]]]
[39] os_md.getbygrs([[0,a,b],[[2,"?"],0],[d,e,f]],["","short"]);
[[0,a,b],[[2,-1/2*a-1/2*b-1/2*d-1/2*e-1/2*f+1],0],[d,e,f]]]
```

## 58. `spslm(m, [k1, k2, ...])`

:: Gets a semilocal monodromy of a rigid linear ordinary differential equation

- $m$  : spectral type of a generalized Riemann scheme.
- calculate the semilocal monodromy corresponding to the simple curve (path) around singular points indexed by  $k_1, k_2, \dots$  (cf. [O7]).
- return the list of generalized Riemann scheme and the logarithm of the semilocal monodromy

```
[0] os_md.spslm("21,21,21,21", [0,3]);
[1] [[[2,a0],[1,a1]],[[2,0],[1,-c-d-a1-2*a0]],[[2,0],[1,c]],[[2,0],[1,d]]],
 [[1,0],[1,a0],[1,d+a1+a0]]]
```

This means that the Jordan Pochhammer equation (of Schlesinger type) with the generalized Riemann scheme

$$\left\{ \begin{array}{cccc} x = \infty & 0 & 1 & y \\ [a_0]_2 & [0]_2 & [0]_2 & [0]_2 \\ a_1 & -2a_0 - a_1 - c - d & c & d \end{array} \right\}$$

is studied and the eigenvalues of the monodromy matrix (which is semisimple if the parameters are generic) corresponding to the simple curve which contains  $\infty$  and  $y$  in the region surrounded by the curve are  $1, e^{2\pi i a_0}, e^{2\pi i (a_0 + a_1 + d)}$ .

#### 59. `shifttop`( $\ell, s | zero=1, raw=k, all=t, dviout=1$ )

:: Gets the shift operator of rigid ODE with a spectral type  $\ell$  corresponding to a shifts  $\ell$  may be a Riemann scheme and  $s$  may be a list of the parameter and the shifted parameter.

Gets the list of the three elements, shift operator, differential operator and the Riemann scheme

- `zero=1` : some of the exponents are normalized to 0
- `raw=1` : normalize including the constant multiple
- `raw=2` : give the constant with the composition with its left inverse shift operator  
The constant vanishes  $\Leftrightarrow$  the shift operator is not isomorphic
- `raw=3` : give the list of the shift operator and the above constant
- `raw=4` : give the list of the shift operator, the above constant and the left inverse shift operator
- `all=0` : give only the shift operator
- `all=1` : give the list of shift operator, differential operator, Riemann scheme, shifted differential operator, shifted Riemann scheme
- `dviout=1` : the result is displayed by `dviout()`. the option `all` is possible. `all=1` means to display including the differential operator.

The exponents to be shifted are better to be the latter ones in each singular points for a faster calculation.

```
[0] os_md.shifttop("11,11,11","00,01,0-1" | zero=1);
[1] [x*dx-b,(-x^2+x)*dx^2+((b+c-2)*x-b+1)*dx+a^2+(b+c-1)*a,
 [[[1,a],[1,-a-b-c+1]],[[1,0],[1,b]],[[1,0],[1,c]]]]
[2] R=os_md.shifttop("11,11,11","00,01,0-1" | zero=1,raw=2,all=0);
a^2+(b+c-1)*a+(c-1)*b
[3] fctr(R);
[[1,1],[a+c-1,1],[a+b,1]]
[4] os_md.shifttop("11,11,11","00,01,0-1" | zero=1,raw=4,all=0);
[x*dx-b,a^2+(b+c-1)*a+(c-1)*b,(x-1)*dx-c+1]
[5] os_md.shifttop("11,11,11","10,00,0-1" | zero=1,raw=2,all=0);
a^2+b*a
[6] fctr(@@);
[[1,1],[a,1],[a+b,1]]
[7] os_md.shifttop("11,11,11","10,00,0-1" | zero=1,raw=3,all=0);
[x*dx+a,a^2+b*a]
[8] os_md.shifttop("11,11,11","1-1,00,00" | zero=1,dviout=1,all=1)$
```

## Shift Operator

$$\begin{aligned} & \left\{ \begin{array}{ccc} x = \infty & 0 & 1 \\ a & 0 & 0 \\ -a - b - c + 1 & b & c \end{array} \right\} = \{u \mid Pu = 0\} \\ & \xrightarrow{Q_1} \left\{ \begin{array}{ccc} x = \infty & 0 & 1 \\ a + 1 & 0 & 0 \\ -a - b - c & b & c \end{array} \right\} \\ & Q_2 \left\{ \begin{array}{ccc} x = \infty & 0 & 1 \\ a + 1 & 0 & 0 \\ -a - b - c & b & c \end{array} \right\} \\ & Q_1 = (2a + b + c)x(x - 1)\partial + a((2a + b + c)x - a - c) \\ & Q_2 = -(2a + b + c)x(x - 1)\partial + (a + b + c)((2a + b + c)x - a - b) \\ & Q_2 Q_1 \equiv a(a + c)(a + b)(a + b + c) \pmod{W(x)P} \\ & P = -x(x - 1)\partial^2 + ((b + c - 2)x - b + 1)\partial + a(a + b + c - 1) \end{aligned}$$

60. **shiftPfaff**(*a,b,g,x,[μ<sub>1</sub>,μ<sub>2</sub>]*)

:: Transformation of an adjacent relation of Pfaffian systems under a middle convolution

Here *a(x)*, *b(x)* and *g(x)* are square matrices of rational functions and  $\mu_1 - \mu_2 \in \mathbb{Z}$  should be valid.  
When

$$\begin{aligned} u'(x) &= a(x)u, \quad u(x) = \frac{1}{\Gamma(\mu_1)} \int_{x_0}^x \bar{u}(t)(x - t)^{\mu_1 - 1} dt, \\ v'(x) &= b(x)v, \quad v(x) = \frac{1}{\Gamma(\mu_2)} \int_{x_0}^x \bar{v}(t)(x - t)^{\mu_2 - 1} dt, \\ \bar{v}(x) &= g(x)\bar{u}(x), \end{aligned}$$

this function returns the matrix *G(x)* satisfying *u(x) = G(x)v(x)*.

- If  $\mu_1 = \mu_2$ ,  $[\mu_1, \mu_2]$  may be simply replaced by  $\mu_1$ .

61. **conf1sp**(*m|x2=±1,conf=0*)

:: Confluence (Poincare rank 1) of a differential operator with spectral type *m*

Partitions corresponding to a spectral type are assumed to the singularities  $\infty, \frac{1}{c}, x_2, \dots$  in this order and the partition corresponding to  $\infty$  should be a refinement of the partition corresponding to  $\frac{1}{c}$ .

If *x2=-1* is indicated,  $\frac{1}{c^2}, \dots$  are replaced by  $x_2, \dots$

If *conf=0* is indicated, the singular points are  $\infty, 0, c, x_3, \dots$  and the confluence of the points 0 and *c* is calculated.

```
[0] P=os_md.conf1sp([[1,1],[1,1],[1,1]]|x2=1);
(-c*x^2+(x_2*c+1)*x-x_2)*dx^2+((-a01-a00-1)*c+a11)*x+x_2*c-x_2*a11+a01+a00)*dx
-a00*a01*c+a00*a11
[1] os_md.fctrtos(P|TeX=1,var=dx);
-(x-x_2)*(cx-1){dx}^2-((a_{01}+a_{00}+1)c-a_{11})x-x_2c+x_2a_{11}-a_{01}-a_{00})
[2] os_md.expat(P,x,"?");
[[x_2,[-a01-a00+1,0]],[(1)/(c),[(a11)/(c),0]],
 [infty,[(a01*c-a11)/(c),a00]]]
[3] Q=os_md.conf1sp([[1,1],[1,1],[1,1]]);
(-c*x^2+x)*dx^2+((-a01-a00-1)*c+a11)*x+a01+a00)*dx-a00*a01*c+a00*a11
[4] subst(Q,c,0);
x*dx^2+(a11*x+a01+a00)*dx+a00*a11
[5] P=os_md.conf1sp([[1,1],[1,1],[1,1]]|conf=0);
(-x^2+c*x)*dx^2+((a01-2)*x+(-a01+1)*c+a11)*dx+a20^2+(a01-1)*a20
```

```

[6] os_md.expat(P,x,"?");
[[0,[(a01*c-a11)/(c),0]], [c,[(a11)/(c),0]], [infty, [-a20-a01+1,a20]]]
[7] subst(-P,c,0);
-x^2*dx^2+((a01-2)*x+a11)*dx+a20^2+(a01-1)*a20
[8] os_md.fctrtos(-@@|TeX=1,var=dx);
x^2{dx}^2-((a_{01}-2)x+a_{11}){dx}-a_{20}(a_{20}+a_{01}-1)

```

## 62. pf2kz( $m | \text{all}=1$ )

:: Converts a Pfaffian system  $m$  of  $n$  variables to a KZ system of  $n + 2$  variables

When  $n = 2$ , the Pfaffian system

$$\begin{aligned}\frac{\partial u}{\partial x} &= \frac{A_1 u}{x} + \frac{A_2 u}{x-1} + \frac{A_0 u}{y} \\ \frac{\partial u}{\partial y} &= \frac{A_3 u}{y} + \frac{A_4 u}{y-1} + \frac{A_0 u}{x}\end{aligned}$$

with  $m = [A_0, A_1, A_2, A_3, A_4]$  is transformed into

$$\frac{\partial u}{\partial x_i} = \sum_{0 \leq j \leq 3, j \neq i} \frac{A_{i,j} u}{x_i - x_j} \quad (0 \leq i \leq 3).$$

Here

$$\begin{aligned}(x_0, x_1, x_2, x_3, x_4) &= (x, y, 0, 1, \infty) \\ A_{i,j} &= A_{j,i}, \quad A_{0,j} = A_j, \quad A_{1,2} = A_3, \quad A_{1,3} = A_4, \\ \sum_{0 \leq i < j \leq 3} A_{i,j} &= \sum_{0 \leq \nu \leq 4, \nu \neq i} A_{i,\nu} = 0.\end{aligned}$$

The function returns the list of  $n + 3$  elements  $[A_{23}, A_{04}, A_{14}, A_{24}, A_{34}]$ .

In general, the coordinates of a Pfaffian system and those of a KZ equation are given by  $(x_0, x_1, \dots, x_{n+2}) = (x, y_1, \dots, y_{n-1}, 0, 1, \infty)$ .

If  $\text{all}=1$  is indicated, this function returns the list of  $A_{ij}$  arranged in the lexicographic order of  $(i, j)$ , which has  $\frac{(n+2)(n+3)}{2}$  elements.

```

[0] N=5$P=[1,2,3,4,5]$MM=os_md(pf2kz(P|all=1)$M=newmat(N,N)$
[1] for(I=0;I<N-1;I++) for(J=I+1;J<N;J++)
 M[I][J]=M[J][I]=MM[os_md.ltext2([I,J,N])[0]]
[2] dviout(M)$

```

$$\begin{pmatrix} 0 & 1 & 2 & 3 & -6 \\ 1 & 0 & 4 & 5 & -10 \\ 2 & 4 & 0 & -15 & 9 \\ 3 & 5 & -15 & 0 & 7 \\ -6 & -10 & 9 & 7 & 0 \end{pmatrix} : \text{the sum of diagonal elements and that in each line are } 0$$

## 63. confexp([[ $c_0, f_0$ ], [ $c_1, f_1$ ], ..., [ $c_m, f_m$ ]]) confexp([[ $f_1, \dots, f_n$ ], [ $c_1, \dots, c_m$ ]] | sym=k])

:: Confluence of characteristic exponents

- A sum of constant multiples of  $\frac{1}{x-c_j}$  ( $j = 0, \dots, m$ ) is expressed by a sum of constant multiples of  $\frac{1}{\prod_{\nu=0}^j (x-c_\nu)}$  ( $j = 0, \dots, m$ ). Namely, this function returns the list  $[\lambda_0, \lambda_1, \dots, \lambda_m]$  of the coefficients given by

$$\sum_{j=0}^m \frac{f_j}{x - c_j} = \sum_{k=0}^m \frac{\lambda_k}{\prod_{\nu=0}^k (x - c_\nu)}$$

(cf. `paracmpl()`). Here  $f_j$  are matrices without the variable  $x$ .

The parameter of this function may be a list of the parameters as above. Then this function returns the list of the corresponding results.

Note that we have

$$\sum_{j=0}^m \frac{f_j}{1 - c_j y} = \sum_{k=0}^m \frac{\lambda_k y^k}{\prod_{\nu=0}^k (1 - c_\nu y)}.$$

by dividing the above equality by  $x$  and putting  $x = \frac{1}{y}$ .

- If `sym=1` is indicated, this function returns the  $n \times m$  matrix  $M$  satisfying

$$\begin{pmatrix} f_1 \\ f_2 \\ \vdots \\ f_n \end{pmatrix} = M \begin{pmatrix} \frac{x^{m-1}}{(x-c_1)\cdots(x-c_m)} \\ \frac{x^{m-2}}{(x-c_1)\cdots(x-c_m)} \\ \vdots \\ \frac{1}{(x-c_1)\cdots(x-c_m)} \end{pmatrix}.$$

Here  $(x - c_1) \cdots (x - c_m) f_j$  should be polynomials of  $x$  with degree  $\leq (m - 1)$ .

- If `sym=2` is indicated, this function returns the list  $[h f_1, \dots, h f_n]$  of polynomials of  $x$  with  $h = (x - c_1) \cdots (x - c_m)$ .
- If `sym=3` is indicated, this function returns the  $n \times m$  matrix  $M$  satisfying

$$\begin{pmatrix} f_1 \\ f_2 \\ \vdots \\ f_n \end{pmatrix} = M \begin{pmatrix} \frac{1}{x-c_1} \\ \frac{1}{(x-c_1)(x-c_2)} \\ \vdots \\ \frac{1}{(x-c_1)\cdots(x-c_m)} \end{pmatrix}.$$

```
[0] F=[[c0,((c0-c1)*a0+a1)/(c0-c1)], [c1,(a1)/(-c0+c1)]] ;
[1] os_md.confexp(F) ;
[a0,a1]
[2] G=os_md.mysubst(F,[c0,0]) ;
[[0,(a0*c1-a1)/(c1)], [c1,(a1)/(c1)]]
[3] os_md.confexp(G) ;
[a0,a1]
[4] os_md.confexp([[1/(x-a1),1/(x-a2)], [a1,a2]]|sym=1) ;
[1 -a2]
[1 -a1]
[5] os_md.confexp([[1/(x-a1),1/(x-a1)/(x-a2)], [a1,a2]]|sym=1) ;
[1 -a2]
[0 1]
[6] os_md.confexp([[1/(x-a1),1/(x-a2)], [a1,a2]]|sym=2) ;
[x-a2,x-a1]
```

64. `mconv(n|var=x,z=1,get=g) mconv([n1,n2,...]|var=[a,b,...],z=1,get=g)`  
`mconv([r,k,i,j]|e=1,var=[a,b,...])`  
:: Middle convolution of versal unfolding

Returns the middle convolution of versal Schlesinger systems

$$\begin{aligned}\frac{du}{dx} &= \sum_{j=1}^n \frac{A_j}{(x-a_1)(x-a_2)\cdots(x-a_j)} u, \\ \frac{du}{dx} &= -\sum_{j=1}^n \frac{A_j x^{j-1}}{(1-a_1x)(1-a_2x)\cdots(1-a_jx)} u, \\ \frac{du}{dx} &= \sum_{i=1}^n \sum_{j=1}^{r_i} \frac{A_{ij}}{(x-a_{i1})(x-a_{i2})\cdots(x-a_{ij})} u, \\ \frac{du}{dx} &= \sum_{i=1}^n \sum_{j=1}^{r_i} \frac{A_{ij}}{(x-a_{i1})(x-a_{i2})\cdots(x-a_{ij})} u - \sum_{j=1}^{r_0} \frac{A_{0j} x^{j-1}}{(1-a_{01}x)(1-a_{02}x)\cdots(1-a_{0j}x)} u.\end{aligned}$$

Fuchsian system

$$\frac{du}{dx} = \sum_{j=a}^p \frac{C_j}{x-a_j} u$$

with square matrices  $C_j$  of size  $N$  is expressed by

$$u' = (C_1, \dots, C_p)^t (p_1, \dots, p_n) u$$

and then the function

$$\tilde{u}(x) = \begin{pmatrix} \Gamma(\mu+1)^{-1} \int_c^x u(t)(x-a_1)^{-1}(x-t)^\mu dt \\ \vdots \\ \Gamma(\mu+1)^{-1} \int_c^x u(t)(x-a_n)^{-1}(x-t)^\mu dt \end{pmatrix}$$

defined by the solution  $u(x)$  ( $c$  is  $a_j$  or  $\infty$ ) satisfies

$$\begin{aligned}\tilde{u}' &= \text{diag}(p_1 I_N, \dots, p_n I_N) \left( {}^t (1_N, \dots, I_N) (C_1, \dots, C_n) + \mu I_{pN} \right) \tilde{u} \\ &= \sum_{j=1}^n \frac{\tilde{C}_j}{x-a_j} \tilde{u}, \quad \tilde{C}_j = \begin{pmatrix} j \\ \vdots \\ 0 & \cdots & 0 & \cdots & 0 \\ \vdots & \cdots & \vdots & \cdots & \vdots \\ C_1 & \cdots & C_j + \mu I_N & \cdots & C_n \\ 0 & \cdots & 0 & \cdots & 0 \\ \vdots & \cdots & \vdots & \cdots & \vdots \end{pmatrix}.\end{aligned}$$

This follows from

$$\begin{pmatrix} (x-a_1) \frac{d}{dx} \frac{u}{x-a_1} \\ (x-a_2) \frac{d}{dx} \frac{u}{x-a_2} \end{pmatrix} = \begin{pmatrix} \frac{(C_1-1)u}{x-a_1} + \frac{C_2 u}{x-a_2} \\ \frac{C_1 u}{x-a_1} + \frac{C_2-1 u}{x-a_2} \end{pmatrix} = \begin{pmatrix} C_1-1 & C_2 \\ C_1 & C_2-1 \end{pmatrix} \begin{pmatrix} \frac{u}{x-a_1} \\ \frac{u}{x-a_2} \end{pmatrix}$$

because the integral transformation  $v(x) \mapsto \int_c^x v(t)(x-t)^\mu dt$  transforms  $x \frac{d}{dx}$  and  $\frac{d}{dx}$  to  $x \frac{d}{dx} - \mu - 1$  and  $\frac{d}{dx}$ , respectively.

- Consider the first equation. Change the base by

$$q_j(x) = \frac{1}{(x - a_1) \cdots (x - a_j)} \quad (j = 1, \dots, n),$$

$$\hat{u}(x) = \begin{pmatrix} \Gamma(\mu + 1)^{-1} \int_c^x u(t) q_1(x)(x-t)^\mu dt \\ \vdots \\ \Gamma(\mu + 1)^{-1} \int_c^x u(t) q_n(x)(x-t)^\mu dt \end{pmatrix}$$

and suppose that  $A_k$  of the first equation are changed to  $\hat{A}_k$ . In this case, this function returns  $[A'_1, \dots, A'_p]$  with `mcvm(n|get=1)` such that

$$\hat{A}_k = (\delta_{i,k} A_j)_{\substack{1 \leq i \leq n \\ 1 \leq j \leq n}} + \mu A'_k$$

Here  $A'_k = (D_{n,k,i,j} I_N)_{\substack{1 \leq i \leq n \\ 1 \leq j \leq n}}$  and  $D_{n,k,i,j}$  is obtained by the option `e=1`, which will be mentioned later.

- If the option `get` is not indicated, the function returns the matrix  $S$  given by

$$\begin{pmatrix} p_1(x) \\ \vdots \\ p_n(x) \end{pmatrix} = S \begin{pmatrix} q_1(x) \\ \vdots \\ q_n(x) \end{pmatrix}$$

where  $\tilde{u} = S^{-1}\hat{u}$  and  $(C_1, \dots, C_n)S = (A_1, \dots, A_n)$ .

$$\hat{u}' = S^{-1}\tilde{u}' = S^{-1} \begin{pmatrix} p_1 \\ \vdots \\ p_n \end{pmatrix} (C_1, \dots) \tilde{u} + S^{-1} \mu \begin{pmatrix} p_1 & & \\ & \ddots & \\ & & \ddots \end{pmatrix} \tilde{u}$$

$$= \mathbf{q}(A_1, A_2, \dots) \hat{u} + \mu S^{-1} \begin{pmatrix} S_1 \mathbf{q} & & \\ & S_2 \mathbf{q} & \\ & & \ddots \end{pmatrix} S \hat{u},$$

$$\sum A_k q_k = S^{-1} \begin{pmatrix} S_1 \mathbf{q} & & \\ & S_2 \mathbf{q} & \\ & & \ddots \end{pmatrix} S, \quad S = \begin{pmatrix} S_1 \\ S_2 \\ \vdots \end{pmatrix}, \quad \mathbf{q} = \begin{pmatrix} q_1 \\ q_2 \\ \vdots \end{pmatrix}.$$

- Consider the second equation. Then  $(x - a_i)^{-1}$  and  $q_i(x)$  are replaced by  $(\frac{1}{a_i} - x)^{-1}$  and  $x^{i-1}(1 - a_1 x)^{-1} \cdots (1 - a_i x)^{-1}$ , respectively, and this function returns the corresponding result.
- By the option `var=[a,b,c,...]` the points  $a_i$  representing the singular points are replaced by  $a, b, c, \dots$
- In the case of the 3-rd equation or the 4-th equation,  $\ell$  is  $[r_1, \dots, r_n]$  or  $[r_0, r_1, \dots, r_n]$ , respectively, and the option `z=1` should be indicated in the latter case.
- Suppose the above Fuchs system can be extended to the KZ system

$$\frac{\partial u}{\partial x_i} = \sum_{\nu \in \{0, \dots, i\} \setminus \{i\}}^p \frac{C_{i,\nu}}{x_i - x_\nu} \quad (i = 0, \dots, p),$$

$$C_{i,j} = C_{j,i}, \quad C_{0,j} = C_j$$

by putting  $x_0 = x$ . Then the convolution transforms  $C_{0,j} = C_j$  to  $\hat{C}_{0,j} = \tilde{C}_j$  and it is extended to the KZ system and the resulting system is

$$\tilde{C}_{i,j} = \begin{pmatrix} & & i & & j \\ & C_{i,j} & & & \\ & \ddots & & & \\ & & C_{i,j} + C_{0,j} & & -C_{0,j} \\ i) & & & C_{i,j} & \\ & & & & \ddots \\ & & & & & C_{i,j} \\ & j) & & -C_{0,i} & & C_{i,j} + C_{0,i} \\ & & & & & \ddots \\ & & & & & & C_{i,j} \end{pmatrix}$$

- Suppose `get=2` is indicated.

The function returns the list of matrices whose elements are the transformation of  $\tilde{C}_{i,j}$  ( $1 \leq i < j \leq p$ ) excluded the diagonal elements  $C_{i,j}$  and expressed by  $A_{0,\nu}$ . Here  $A_j$  or  $A_{i,j}$  are used for the versal unfolding and  $A_{0,\nu}$  is expressed as  $a0\nu$  by default. This gives the a convolution of KZ equation with unramified irregular singularities (cf. [O9]).

- Suppose `get=3` is indicated.

The matrix  $A_1(x)$  of the equation  $\frac{\partial \hat{u}}{\partial x_1} = A_1(x)\hat{u}$  corresponding to the 3-rd equation with  $n = 2$  and  $x_0 = x$  and  $a_{1,j} = x_1 - a_j$  and  $a_{2,j} = x_2 - b_j$  is expressed by using a complete base

$$\left\{ \frac{1}{(x_1 - x_0)^\nu} \mid \nu = 1, \dots, r_1 \right\} \cup \left\{ \frac{1}{x_1 - x_2 + a_1 - b_1}, \dots, \frac{1}{(x_1 - x_2 + a_1 - b_1) \cdots (x_1 - x_2 + a_1 - b_{r_2})}, \dots, \frac{1}{(x_1 - x_2 + a_1 - b_1) \cdots (x_1 - x_2 + a_{r_1} - b_{r_2})} \right\}.$$

This function returns a list whose first part is the list of the latter  $r_1 r_2$  coefficients with respect the base. Here  $a_1 = b_1 = 0$  is substituted and the diagonal parts  $A_{i,j}$  are omitted. The latter part of the list is the substitution  $a_2 = \dots = a_{r_1} = b_1 = \dots = b_{r_2} = 0$  of the first part.

The result in the case when  $n > 2$  is easily obtained by that in the case when  $n = 2$  (cf. [O9]).

$$\begin{aligned} I &= \{i_0, i_0 + 1, \dots, i_0 + r_I - 1\}, \quad J = \{j_0, j_0 + 1, \dots, j_0 + r_J - 1\}, \\ du &= \sum_{\nu} \frac{C_{0,\nu}}{x - x_\nu} dx = \sum_{i \notin I} \frac{C_{0,i}}{x - x_\nu} du + \sum_{i \in I} \frac{A_{0,i}}{(x - x_{i_0}) \cdots (x - x_i)} du, \\ \frac{\partial \hat{u}}{\partial x_{i_0}} &= \sum_{i \in I} \left( \frac{\tilde{A}_{i,0}}{(x_{i_0} + e_{i_0} - x_0) \cdots (x_{i_0} + e_i - x_0)} + S^{-1} \sum_{\nu \notin I, \nu \neq 0} \frac{\tilde{C}_{i,\nu}}{x_{i_0} + e_i - x_\nu} S \right) \hat{u}, \\ \tilde{C}_{i,\nu} &= \left( C_{i,\nu} \delta_{p,q} + \delta_{p,i} (\delta_{q,i} - \delta_{q,\nu}) C_{0,\nu} + \delta_{p,\nu} (\delta_{q,\nu} - \delta_{q,i}) C_{0,i} \right)_{p,q}, \end{aligned}$$

$$\begin{aligned}
\frac{1}{x_{i_0} + e_i - x_{j_0} - e_j} &= \sum_{k \in I, \ell \in J} U_{(i,j),(k,\ell)} q_{k,\ell}, \\
S^{-1} \sum_{i \in I, j \in J} &\left( C_{i,j} \delta_{p,q} + \delta_{p,i} (\delta_{q,i} - \delta_{q,j}) C_{0,j} + \delta_{p,j} (\delta_{q,j} - \delta_{q,i}) C_{0,i} \right)_{p,q} (x_{i_0} + e_i - x_{j_0} - e_j)^{-1} S \\
&= \sum_{i \in I, j \in J} \sum_{k \in I, \ell \in J} S^{-1} \left( C_{i,j} \delta_{p,q} + \delta_{p,i} (\delta_{q,i} - \delta_{q,j}) C_{0,j} + \delta_{p,j} (\delta_{q,j} - \delta_{q,i}) C_{0,i} \right)_{p,q} S U_{(i,j),(k,\ell)} q_{k,\ell} \\
&= \sum_{k \in I, \ell \in J} \left( A_{k,\ell} \delta_{p,q} \right)_{p,q} q_{k,\ell} \\
&+ \sum_{i \in I, j \in J} \sum_{k \in I, \ell \in J} S^{-1} \left( \delta_{p,i} (\delta_{q,i} - \delta_{q,j}) \sum_{s=i_0}^i A_{0,s} q_{s-i_0+1, \{1, \dots, s-i_0\}} (x_{i_0}, \dots) \right)_{p,q} S U_{(i,j),(k,\ell)} q_{k,\ell} \\
&+ \sum_{i \in I, j \in J} \sum_{k \in I, \ell \in J} S^{-1} \left( \delta_{p,i} (\delta_{q,j} - \delta_{q,i}) \sum_{s=j_0}^j A_{0,s} q_{s-j_0+1, \{1, \dots, s-j_0\}} (x_{j_0}, \dots) \right)_{p,q} S U_{(i,j),(k,\ell)} q_{k,\ell}.
\end{aligned}$$

- If **get=4** is indicated, the latter element of the list given by **get=3** is returned.
- If **e=1** is indicated and the first parameter is  $[r, k, i, j]$ , then the polynomial  $D_{r,k,i,j}$  of degree  $j + k - i - 1$  is returned ( $r$  is ignored).

$$\begin{aligned}
S &= \left( S_{i,j} \right)_{i,j}, \quad S_{i,j} = \begin{cases} 0 & (i < j) \\ s_{i,\{1, \dots, j\}} & (i \geq j) \end{cases} \quad (\text{最初の方程式}), \\
s_{i,\{j_1, \dots, j_k\}}(\mathbf{a}) &:= \prod_{j=1}^k (a_i - a_{j_\nu}), \quad p_i = \sum_{j=1}^i s_{i,\{1, \dots, j-1\}} q_j, \\
D_{r,k,i,j}(\mathbf{a}) &:= \sum_{\nu=\max\{k,j\}}^i \frac{s_{\nu,\{1, \dots, j-1\}}}{s_{\nu,\{k, k+1, \dots, i\} \setminus \{\nu\}}}.
\end{aligned}$$

- If **e=2** is indicated and the first parameter is  $[r, k, i, j]$ , then the polynomial  $D'_{r,k,i,j}$  of degree  $j + k - i - 1$  is returned.

$$D'_{r,k,i,j}(\mathbf{a}') := \sum_{\nu=\max\{k,j\}}^i \frac{a_{\nu+1} s_{\nu+1,\{2, \dots, j\}}}{s_{\nu+1,\{k, k+1, \dots, i+1\} \setminus \{\nu+1\}}} = D_{r,k,i+1,j+1}(\mathbf{a})|_{a_1=0}.$$

```

[0] os_md.mcvm([2,1]);
[1 0 0]
[1 -a1+a2 0]
[0 0 1]
[1] os_md.mcvm([2,2]|var=[a,b]);
[1 0 0 0]
[1 -a1+a2 0 0]
[0 0 1 0]
[0 0 1 -b1+b2]
[2] os_md.mcvm([2,1]|get=1);
[[1 0 0]
 [0 1 0]
 [0 0 0],
 [0 0 0]
 [1 -a1+a2 0]]

```

```
[0 0 0],
[0 0 0]
[0 0 0]
[0 0 1]]
```

This is the 3-rd equation with  $n = 2$ ,  $r_1 = 2$ ,  $r_2 = 1$  and we have

$$\hat{A}_{1,1} = \begin{pmatrix} A_1 + \mu & A_2 & A_3 \\ 0 & \mu & 0 \\ 0 & 0 & 0 \end{pmatrix}, \quad \hat{A}_{1,2} = \begin{pmatrix} 0 & 0 & 0 \\ A_1 + \mu & A_2 + (a_2 - a_1)\mu & A_3 \\ 0 & 0 & 0 \end{pmatrix},$$

$$\hat{A}_{2,1} = \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ A_1 & A_2 & A_3 + \mu \end{pmatrix}$$

```
[3] subst(os_md.mcvm([1,3]|get=1),b1,0);
[[1 0 0 0]
 [0 0 0 0]
 [0 0 0 0]
 [0 0 0 0],
 [0 0 0 0]
 [0 1 0 0]
 [0 0 1 0]
 [0 0 0 1],
 [0 0 0 0]
 [0 0 0 0]
 [0 1 b2 0]
 [0 0 1 b3],
 [0 0 0 0]
 [0 0 0 0]
 [0 0 0 0]
 [0 1 b3 -b3*b2+b3^2]]
[4] M=os_md.mcvm([1,3])$
```

- [5] A=os\_md.mcvm([1,3]|get=2)\$
- [6] M=subst(M,b1,0)\$ A=subst(A,b1,0)\$
- [7] map(red,M[1][1]\*A[0]+M[2][1]\*A[1]+M[3][1]\*A[2]); /\* A12 \*/
 [ a02 -a02 -a03 -a04 ]
 [ -a01 a01 0 0 ]
 [ 0 0 a01 0 ]
 [ 0 0 0 a01 ]
- [8] map(red,M[1][2]\*A[0]+M[2][2]\*A[1]+M[3][2]\*A[2]); /\* A13 \*/
 [ a03 -a03 -a03\*b2-a04 -a04\*b3 ]
 [ 0 0 0 0 ]
 [ -a01 a01 a01\*b2 0 ]
 [ 0 0 a01 a01\*b3 ]
- [9] map(red,M[1][3]\*A[0]+M[2][3]\*A[1]+M[3][2]\*A[3]); /\* A14 \*/
 [ a04 -a04 -a04\*b3 a04\*b3\*b2-a04\*b3^2 ]
 [ 0 0 0 0 ]
 [ 0 0 0 0 ]

[ -a01 a01 a01\*b3 -a01\*b3\*b2+a01\*b3^2 ]

This shows that the convolution of the system

$$\begin{aligned}\frac{\partial u}{\partial x_0} &= \left( \frac{A_{01}}{x_0 - x_1} + \sum_{j=2}^4 \frac{A_{0j}}{(x_0 - x_2)(x_0 - x_2 - b_2) \cdots (x_0 - x_2 - b_{j-1})} \right) u, \\ \frac{\partial u}{\partial x_1} &= \left( \frac{A_{10}}{x_1 - x_0} + \sum_{j=2}^4 \frac{A_{1j}}{(x_1 - x_2)(x_1 - x_2 - b_2) \cdots (x_1 - x_2 - b_{j-1})} \right) u, \\ \frac{\partial u}{\partial x_2} &= \sum_{i=0}^1 \sum_{j=2}^4 \left( \frac{(-1)^j A_{ji}}{(x_2 - x_i)(x_2 - x_i + b_2) \cdots (x_2 - x_1 + b_{j-1})} \right) u, \\ A_{i,j} &= A_{j,i}\end{aligned}$$

is given by

$$\begin{aligned}\hat{A}_{01} &= \begin{pmatrix} A_{01} + \mu & A_{02} & A_{03} & A_{04} \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix}, \quad \hat{A}_{02} = \begin{pmatrix} 0 & 0 & 0 & 0 \\ A_{01} & A_{02} + \mu & A_{03} & A_{04} \\ 0 & 0 & \mu & 0 \\ 0 & 0 & 0 & \mu \end{pmatrix}, \\ \hat{A}_{03} &= \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ a_{01} & A_{02} + \mu & A_{03} + b_2\mu & A_{04} \\ 0 & 0 & \mu & b_3\mu \end{pmatrix}, \quad \hat{A}_{04} = \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ A_{01} & A_{02} + \mu & A_{03} + b_3\mu & A_{04} + b_3(b_3 - b_2)\mu \end{pmatrix}, \\ \hat{A}_{12} &= \begin{pmatrix} A_{12} + A_{02} & -A_{02} & -A_{03} & -A_{04} \\ -A_{01} & A_{12} + A_{01} & 0 & 0 \\ 0 & 0 & A_{12} + A_{01} & 0 \\ 0 & 0 & 0 & A_{12} + A_{01} \end{pmatrix}, \\ \hat{A}_{13} &= \begin{pmatrix} A_{13} + A_{03} & -A_{03} & -b_2 A_{03} - A_{04} & -b_3 A_{04} \\ 0 & A_{13} & 0 & 0 \\ -A_{01} & A_{01} & A_{13} + A_{01} & b_3 A_{01} \\ 0 & 0 & A_{01} & A_{13} + b_3 A_{01} \end{pmatrix}, \\ \hat{A}_{14} &= \begin{pmatrix} A_{14} + A_{04} & -A_{04} & -b_3 A_{04} & -b_3(b_3 - b_2) A_{04} \\ 0 & A_{14} & 0 & 0 \\ 0 & 0 & A_{14} & 0 \\ -A_{01} & A_{01} & b_3 A_{01} & A_{14} + b_3(b_3 - b_2) A_{01} \end{pmatrix}\end{aligned}$$

with  $\tilde{A}_{ij} = \tilde{A}_{ji}$ .

```
[10] os_md.mcvm([2,3]|get=1);
[[1 0 0 0 0]
 [0 1 0 0 0]
 [0 0 0 0 0]
 [0 0 0 0 0]
 [0 0 0 0 0],
 [0 0 0 0 0]
 [1 -a1+a2 0 0 0]
 [0 0 0 0 0]
 [0 0 0 0 0]
 [0 0 0 0 0],
 [0 0 0 0 0]
 [0 0 0 0 0]
 [0 0 1 0 0]
```

```

[0 0 0 1 0]
[0 0 0 0 1],
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 1 -b1+b2 0]
[0 0 0 1 -b1+b3],[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 1 -b1+b3 (b2-b3)*b1-b3*b2+b3^2]]
[11] os_md.mcvm([2,3]|get=4);
[[a03 0 -a03 -a04 -a05]
[0 a03 0 0 0]
[-a01 -a02 a01 0 0]
[0 0 0 a01 0]
[0 0 0 0 a01],
[a04 0 -a04 -a05 0]
[-a03 a04 a03 a04 a05]
[a02 0 -a02 0 0]
[-a01 -a02 a01 -a02 0]
[0 0 0 a01 -a02],
[a05 0 -a05 0 0]
[-2*a04 a05 2*a04 2*a05 0]
[0 0 0 0 0]
[2*a02 0 -2*a02 0 0]
[-a01 -a02 a01 -2*a02 0],
[0 0 0 0 0]
[-3*a05 0 3*a05 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[3*a02 0 -3*a02 0 0],
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0],
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]
[0 0 0 0 0]]]

```

This result shows that the convolution of the KZ equation

$$\begin{aligned}\frac{\partial u}{\partial x_0} &= \left( \sum_{\nu=1}^2 \frac{A_{0,\nu}}{(x_0 - x_1)^\nu} + \sum_{\nu=1}^3 \frac{A_{0,\nu+2}}{(x_0 - x_2)^\nu} \right) u, \\ \frac{\partial u}{\partial x_1} &= \left( \sum_{\nu=1}^2 \frac{(-1)^{\nu-1} A_{\nu,0}}{(x_1 - x_0)^\nu} + \sum_{\nu=1}^4 \frac{A_{1,\nu+2}}{(x_1 - x_2)^\nu} \right) u, \\ \frac{\partial u}{\partial x_2} &= \left( \sum_{\nu=1}^3 \frac{(-1)^{\nu-1} A_{\nu+2,0}}{(x_2 - x_0)^\nu} + \sum_{\nu=1}^4 \frac{(-1)^{\nu-1} A_{\nu+2,1}}{(x_2 - x_1)^\nu} \right) u, \\ A_{i,j} &= A_{j,i}\end{aligned}$$

is given by (cf. [O9])

$$\begin{aligned}\hat{A}_{01} &= \begin{pmatrix} A_{01} + \mu & A_{02} & A_{03} & A_{04} & A_{05} \\ 0 & \mu & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \end{pmatrix}, \quad \hat{A}_{02} = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 \\ A_{01} + \mu & A_{02} & A_{03} & A_{04} & A_{05} \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \end{pmatrix}, \\ \hat{A}_{03} &= \begin{pmatrix} 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ A_{01} & A_{02} & A_{03} + \mu & A_{04} & A_{05} \\ 0 & 0 & 0 & \mu & 0 \\ 0 & 0 & 0 & 0 & \mu \end{pmatrix}, \quad \hat{A}_{04} = \begin{pmatrix} 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ A_{01} & A_{02} & A_{03} + \mu & A_{04} & A_{05} \\ 0 & 0 & 0 & \mu & 0 \end{pmatrix}, \\ \hat{A}_{05} &= \begin{pmatrix} 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 \\ A_{01} & A_{02} & A_{03} + \mu & A_{04} & A_{05} \end{pmatrix}, \\ \hat{A}_{13} &= \begin{pmatrix} A_{13} + A_{03} & 0 & -A_{03} & -A_{0,4} & -A_{05} \\ 0 & A_{13} + A_{03} & 0 & 0 & 0 \\ -A_{01} & -A_{02} & A_{13} + A_{01} & 0 & 0 \\ 0 & 0 & 0 & A_{13} + A_{01} & A_{02} \\ 0 & 0 & 0 & 0 & A_{13} + A_{01} \end{pmatrix}, \\ \hat{A}_{14} &= \begin{pmatrix} A_{14} + A_{04} & 0 & -A_{04} & -A_{05} & 0 \\ -A_{03} & A_{14} + A_{04} & A_{03} & A_{04} & A_{05} \\ A_{02} & 0 & A_{14} - A_{02} & 0 & 0 \\ -A_{01} & -A_{02} & A_{14} + A_{01} & -A_{02} & 0 \\ 0 & 0 & 0 & A_{01} & A_{14} - A_{02} \end{pmatrix}, \\ \hat{A}_{15} &= \begin{pmatrix} A_{15} + A_{05} & 0 & -A_{05} & 0 & 0 \\ -2A_{04} & A_{15} + A_{05} & 2A_{04} & 2A_{05} & 0 \\ 0 & 0 & A_{15} & 0 & 0 \\ 2A_{02} & 0 & -2A_{02} & A_{15} & 0 \\ -A_{01} & -A_{02} & A_{01} & -2A_{02} & A_{15} \end{pmatrix}, \\ \hat{A}_{16} &= \begin{pmatrix} A_{16} & 0 & 0 & 0 & 0 \\ -3A_{05} & A_{16} & 3A_{05} & 0 & 0 \\ 0 & 0 & A_{16} & 0 & 0 \\ 0 & 0 & 0 & A_{16} & 0 \\ 3A_{02} & 0 & -3A_{02} & 0 & A_{16} \end{pmatrix}\end{aligned}$$

## 65. anal2sp( $m, l$ )

:: Analyzes simultaneous spectral exponents  $m$

$m = [[m_1, \lambda_1, \mu_1], [m_2, \lambda_2, \mu_2], \dots]$  are the list of lists of multiplicity and a pair of simultaneous eigenvalues

$l$  has the following meaning. Here a spectral type means a pair of eigenvalues.

0 unifies the same spectral types (works for single eigenvalues).

["add",  $n$ ] add spectral type  $n$  (works for single eigenvalues).

["sub",*n*] delete spectral type *n* (works for single eigenvalues).  
 ["swap"] swap eigenvalues  
 ["+",*c*<sub>1</sub>,*c*<sub>2</sub>] shifts eigenvalues  
 [\*",*c*<sub>1</sub>,*c*<sub>2</sub>] linear combinations of eigenvalues  
 ["+",*c*<sub>1</sub>,*c*<sub>2</sub>,...] shift eigenvalues (number of eigenvalues are arbitrary)  
 [\*",*c*<sub>1</sub>,*c*<sub>2</sub>,...] linear combinations of eigenvalues (number of eigenvalues are arbitrary)  
 ["mult",*m*] multiplies the multiplicities by *m*.  
 ["get",*f*,*c*] extracts the elements whose *f*-th eigenvalue = *c*.  
 ["put",*f*,*c*] replaces the *f*-th eigenvalue by *c*.  
 ["get1",*f*] extracts only *f*-th eigenvalues (the result is not a pair of eigenvalues)  
 ["get1",*f*,*c*] extracts elements *f*-th eigenvalue equals *c* (the result is deleted th eigenvalue *c*)  
 ["put1",*f*,*c*] inserts *f*-th eigenvalue *c*  
 ["put1"] copies eigenvalues  
 ["max"] returns the position with the maximal multiplicity with the corresponding element  
 ["max",*f*,*c*] returns the position with the maximal multiplicity whose *f*-th eigenvalue is *c* and  
     the corresponding element. returns [-1] if there are no such element  
 ["val",*f*] returns the multiplicity and the sum of eigenvalues of the *f*-th element.  
 [[..., ..., ...]] executes several commands

```

[0] R=os_md.anal2sp([[2,a,b],[3,a,c],[-1,a,c]],["add", [[-2,a,b],[1,b,c]]]);
[[2,a,b],[3,a,c],[-1,a,c],[-2,a,b],[1,b,c]] /* define R */
[1] os_md.anal2sp([[2,a,b],[3,a,c],[-1,a,c]],["sub", [[2,a,b],[-1,b,c]]]);
[[2,a,b],[3,a,c],[-1,a,c],[-2,a,b],[1,b,c]]
[2] os_md.anal2sp(R,["swap"]); /* swap two eigenvalues */
[[2,b,a],[3,c,a],[-1,c,a],[-2,b,a],[1,c,b]]
[3] os_md.anal2sp(R,0); /* unify */
[[2,a,c],[1,b,c]]
[4] os_md.anal2sp(R,["+ ",f,-g]); /* shift eigenvalues */
[[2,a+f,b-g],[3,a+f,c-g],[-1,a+f,c-g],[-2,a+f,b-g],[1,b+f,c-g]]
[5] os_md.anal2sp(R,["*",f,-g]); /* linear combination of eigenvalues */
[[2,f*a-g*b],[3,f*a-g*c],[-1,f*a-g*c],[-2,f*a-g*b],[1,f*b-g*c]]
[6] os_md.anal2sp(R,"* ",f);
[[2,f*a],[3,f*a],[-1,f*a],[-2,f*a],[1,f*b]]
[7] os_md.anal2sp([[2,a,b],[3,a,c],[-1,a,c]],["mult",2]); /* multiplicity *= m */
[[4,a,b],[6,a,c],[-2,a,c]]
[8] os_md.anal2sp(R,["get",2,c]); /* extract elements with a given eigenvalue */
[[3,a,c],[-1,a,c],[1,b,c]]
[9] os_md.anal2sp(R,["put",1,f]); /* replace eigenvalues */
[[2,f,b],[3,f,c],[-1,f,c],[-2,f,b],[1,f,c]]
[10] os_md.anal2sp(R,["get",1,a]); /* extract elements with a given eigenvalue */
[[2,a,b],[3,a,c],[-1,a,c],[-2,a,b]]
[11] R1=os_md.anal2sp(R,["get1",1,a]); /* extract elements by a given eigenvalue */
[[2,b],[3,c],[-1,c],[-2,b]]
[12] os_md.anal2sp(R1,["put1",1,a]); /* insert an eigenvalue */
[[2,a,b],[3,a,c],[-1,a,c],[-2,a,b]]
[13] os_md.anal2sp(R1,["put1"]); /* copies eigenvalues */

```

```

[[2,b,b],[3,c,c],[-1,c,c],[-2,b,b]]
[14] os_md.anal2sp(R,[{"val",1}); /* sum of 1-st eigenvalues */
[3,2*a+b]
[15] os_md.anal2sp(R,[["get1",1],["put1"],0]);
[[2,a,a],[1,b,b]]
[16] os_md.anal2sp(R,[{"max"}]); /* maximal multiplicity */
[1,[3,a,c]]
[17] os_md.anal2sp(R,[{"max",1,b}]);
[4,[1,b,c]]
[18] os_md.anal2sp(R,[{"max",1,c}]);
[-1]

66. mc2grs(g,r|top=0,dviout=k,div=l,fig=s)
:: Transformation of simultaneous spectral exponents of KZ equation of 5 points in \mathbb{P}^1
The KZ equation

```

$$du = \sum_{0 \leq i < j \leq 3} A_{i,j} \frac{d(x_i - x_j)}{x_i - x_j} u,$$

$$A_{i,4} = - \sum_{j=0}^3 A_{i,j}, \quad A_{j,i} = A_{i,j}, \quad A_{i,i} = 0$$

satisfies

$$[A_I, A_J] = 0 \quad (I, J \subset \{0, 1, 2, 3\}, \#I = \#J = 2, I \cap J = \emptyset)$$

and the simultaneous eigenspace decompositions are possible for the 15 pairs of  $A_I$  and  $A_J$  satisfying  $[A_I, A_J] = 0$ . Then  $g$  indicates a list of 15 lists each of which consists of  $[I, J]$  and the corresponding dimension of simultaneous eigenspace and two eigenvalues for the pairs  $A_I$  and  $A_J$ . Here  $I=[i_1, i_2]$ ,  $J=[j_1, j_2]$  with  $i_1 < i_2$ ,  $j_1 < j_2$ ,  $i_1 < j_1$ . For example, the list corresponding to

$$A_{0,1} = \begin{pmatrix} a & & \\ & a & \\ & & b \end{pmatrix}, \quad A_{2,3} = \begin{pmatrix} c & & \\ & c & \\ & & d \end{pmatrix}$$

is  $[[[0,1],[2,3]],[2,a,c],[1,b,d]]$ .

We may assume that  $\sum_{0 \leq i < j \leq 3} A_{i,j}$  is a scalar matrix because of the generic irreducibility and we denote the scalar by  $\kappa$ .

Other parameters mean as follows.

- $g = 0$  means trivial  $[[[0,1],[2,3]],[1,0,0]],[[0,1],[2,4]],[1,0,0],\dots]$ .
- $g$  may be indicated by spectral types of 4 matrices  $A_{0,4}$ ,  $A_{0,1}$ ,  $A_{0,2}$ ,  $A_{0,3}$  (string or GRS for 4 points) in this order. Then the options `dep=[m,n]`, `int=0` etc. are possible as for the function `m2mc()`.

If `top=0` is indicated, the order is changed to  $A_{0,1}$ ,  $A_{0,2}$ ,  $A_{0,3}$ ,  $A_{0,4}$ .

If  $g$  is indicated by spectral type or string, the parameter  $r$  has the meaning as follows.

- $r = 1$  : Changes the spectral type in standard order and returns the list of 15 lists of eigenspace decompositions.
- $r = 3$  : Define the parameters of simultaneous eigenvalues by `a,b,c,...` and returns the Fuchs condition and the list of 15 lists.

$r$  determines the following functions

- $0$  : returns the list of 15 lists.
- `["sort"]` : arranges the list so that its elements are in standard order (`[ ]` may be omitted).

- `["deg"]` : returns  $\kappa$  (`[ ]` may be omitted).  
Note that  $A_{0,1} + A_{0,2} + A_{0,3} + A_{1,2} + A_{1,3} + A_{2,3} = \kappa$  and  

$$A_{i,j} = A_{\{0,1,2,3,4\} \setminus \{i,j\}} \begin{cases} +\kappa & (j < 4) \\ -\kappa & (j = 4) \end{cases} \quad (0 \leq i < j \leq 4).$$
- `[[i,j], λ]` : transforms by the addition  $A_{i,j} \mapsto A_{i,j} + \lambda$ ,  $A_{i,4} \mapsto A_{i,4} - \lambda$ ,  $A_{j,4} \mapsto A_{j,4} - \lambda$ . ( $0 \leq i < j \leq 3$ ).
- `["homog"]` : transforms by the addition  $r = [[1,3], -\kappa]$  to change  $\kappa = 0$  (`[ ]` may be omitted).
- `["homog", [m,n]]` : transforms by the addition  $r = [[m,n], -\kappa]$  ( $0 \leq m < n < 4$ ) to change  $\kappa = 0$  (`[ ]` may be omitted).
- `["swap", [i,j]]` : swaps the indices  $i$  and  $j$ . If  $i$  or  $j$  is 4, swap them after the homogenization by  $r = ["homog"]$ .
- `["perm", [i0, ..., i4]]` : permutation of indices  $\begin{pmatrix} 0 & 1 & 2 & 3 & 4 \\ i_0 & i_1 & i_2 & i_3 & i_4 \end{pmatrix}$ . If the index 4 is changed, the permutation is applied after the homogenization.
- `[\mu]` : middle convolution  $\text{mc}_{x_0,\mu}$  for the variable  $x_0$  (the algorithm is given by [O5]).
- `[i,μ]` : middle convolution  $\text{mc}_{x_i,\mu}$  for the variable  $x_i$ . If  $i = 4$ , this function first transforms by  $r = ["swap", [0,4]]$  and then by  $\text{mc}_{x_0,\mu}$  and lastly by  $r = ["swap", [0,4]]$ .
- `[[[i1,j1],λ1], ..., [ik,μk], ...]` : transforms by successive additions middle convolutions.
- `[[a,b,c]]` : means `[[[0,1],a],[[0,2],b],[[0,3],c]]`.
- `[[a,b,c,μ]]` : means `[[[0,1],a],[[0,2],b],[[0,3],c],[μ]]`.
- `["get", [I,J]]` : returns the list of simultaneous eigenvalues corresponding to  $[A_I, A_J] = 0$  with the header  $[I, J]$ .
- `["get", I]` : returns the list of eigenvalues of  $A_I$  with the header  $I$ .
- `["get", [i,j,k]]` : returns the spectral data of  $A_{i,j} + A_{i,k} + A_{j,k}$  with the header  $I$ .
- `["get", i] (0 ≤ i ≤ 4)` : returns the GRS corresponding to  $i \in I$ , which is the GRS of ODE of the variable  $x_i$ .  
If `dviout=1` is indicated, the result is displayed by using `TEX`.  
If `dviout=-1` is indicated, the result is given by the `TEX` source.  
If `dviout=2` is indicated, the result is written in the `TEX` source file without its display. The result can be displayed later by a command.
- `["get"]` : returns the list of eigenvalues of 10 matrices  $A_I$ .  
`dviout=k` can be indicated. In this case the Riemann Scheme is divided to lines by the option `div=l` (cf. `divmattex()`).
- `["get0", [I,J]], ["get0", I], ["get0", i] (0 ≤ i ≤ 4), ["get0", [i,j,k]], ["get0"]` : same as in the case where "get0" is replaced by "get" except that the headers are omitted.
- `["get0", I, J]` : returns the spectral values of  $A_I + A_J$ .
- `["show"]` : displays the list  $g$  by using `TEX`.  
The option `dviout=-1` is possible.  
The option `dviout=1, -1, 2` is possible. Moreover
  - `fig=1` indicates to show the result in a figure by using `TikZ`.
  - `fig=[k]` : the size of the figure is about  $k$  cm (or a little larger).  $k = 12$  is the default setting.
  - `fig=[k,s]` or `fig=[s]` :  $s$  is a string to indicates 10 colors.  
 $[s]$  is `["black,dashed", "green,dashed", "red,dashed", "blue,dashed", "black", "cyan", "green", "blue", "red", "magenta"]` by default.
- `["spct"]` : returns the spectral types as a  $5 \times 5$  matrix  
The  $(i,j)$  element id the spectral type of  $A_{i,j}$  if  $i \neq j$  and the index of rigidity with respect to

$s_i$  if  $i = j$  ( $0 \leq i, j \leq 4$ ).

`dviout=k` is possible.

- `["spct1"]` : returns a  $5 \times 6$  matrix describing the spectral types together with the spectral type after one-step reduction (if possible). The result is same as in the case `["spct"]` but the 6-th column is added which is formed by the spectral types after one-step reduction.
  - `["mult",  $\ell_1, \dots, \ell_m$ ]` : Puts  $g_0 = g$  and executes this function with  $g_i = \text{mc2grs}(g_{i-1}, \ell_i)$  for  $i = 1, \dots, m$  and returns  $g_m$ . Other options are valid.
  - `["eigen",  $I$ ]` : returns the eigenspace decompositions of each eigenspace of  $A_I$  by the action of 3 residue matrices commuting with  $A_I$  (the list of eigenvalues of  $A_I$  and eigenspace decompositions. The eigenspace decomposition is the pair of multiplicities and the eigenvalue of the matrix commuting with  $A_I$ ).
- The matrices which commutes with  $A_I$  are  $A_J$  satisfying  $J \subset \{0, 1, 2, 3, 4\} \setminus I$  and the result is returned in the lexicographic order of  $J$ . For example,  $J$  are  $[1, 3]$ ,  $[1, 4]$  and  $[3, 4]$  in the lexicographic order if  $I = [0, 2]$ .
- `["rest",  $I$ ]` : returns GRS of the boundary equations of  $x_0$  corresponding to the exponents of the singular line  $x_i = x_j$  with  $I = [i, j]$ . The singularities  $x_0 = x_k$  are arranged from a smaller  $k$ .
  - `["rest0",  $I$ ]` : returns spectral types (strings) of the boundary equations of  $x_0$  corresponding to the exponent of the singular line  $x_i = x_j$  with  $I = [i, j]$ .
  - `["rest1",  $I$ ]` : returns non-rigid spectral types of the boundary equation of  $x_0$  corresponding to the exponent of the singular line  $x_i = x_j$  with  $I = [i, j]$ .
  - When `["eigen"]`, `["rest"]`, `["rest0"]` or `["rest1"]` is indicated, the function returns the list of the above results of all 10  $I$  with  $I$  on the each top.

In this case the option `dviout=1, -1, 2` is possible.

- `["K0",  $[\mu, \lambda]$ ]` :  $\tilde{K}_x^{-\mu-\lambda, \lambda} [[0, 0, \lambda, -\mu - \lambda], [0, 0, \mu]] : \frac{(\lambda)_m}{(1-\mu)_m} \times$
  - `["K1",  $[\mu, \lambda]$ ]` :  $\tilde{K}_y^{-\mu-\lambda, \lambda} [[\text{"swap"}, [0, 1]], [0, 0, \lambda, -\mu - \lambda], [0, 0, \mu], [\text{"swap"}, [0, 1]]]$
  - `["K01",  $[\mu, \lambda]$ ]` :  $\tilde{K}_{x, (x,y) \mapsto (x, \frac{x}{y})}^{-\mu-\lambda, \lambda}$
  - `["K2",  $[\mu, \lambda]$ ]` :  $[[0, \lambda, 0, -\mu - \lambda], [0, 0, \mu]]$
  - `["K3",  $[\mu, \lambda]$ ]` :  $[[\text{"swap"}, [0, 1]], [0, \lambda, 0, -\mu - \lambda], [0, 0, \mu], [\text{"swap"}, [0, 1]]]$
  - `["K",  $[p, q, r]$ ]` :  $\sum_{m=0}^{\infty} \sum_{n=0}^{\infty} \frac{(a_1)_m (b_1)_n \prod_{\nu=2}^p (a_\nu)_m \prod_{\nu=2}^q (b_\nu)_n \prod_{\nu=1}^r (c_\nu)_{m+n}}{\prod_{\nu=2}^p (1-d_\nu)_m \prod_{\nu=2}^q (1-e_\nu)_n \prod_{\nu=1}^r (1-f_\nu)_{m+n} m! n!} x^m y^n$   
rank :  $pq + qr + rp$
  - `["I",  $[p, q]$ ]` :  $\sum_{m=0}^{\infty} \sum_{n=0}^{\infty} \frac{\prod_{\nu=1}^{p-1} (a_\nu)_m \prod_{\nu=1}^{q-1} (b_\nu)_n \cdot (c)_{m+n}}{\prod_{\nu=2}^p (1-d_\nu)_m \prod_{\nu=2}^q (1-e_\nu)_n m! n!} x^m y^n$   
rank :  $pq, (pq-1)1, (pq-q+1)1^{q-1}, q^p, q^{p-1}1^q$
- If  $(x_0, x_1, x_2, x_3, x_4) = (x, y, 1, 0, \infty)$ , then
- $(1-x-y)^{-\lambda} \times$  :  $[[[0, 1], -\lambda], [[2, 3], \lambda]]$  at  $(0, 1)$  or  $(1, 0)$
- $(1-x)^{-\lambda} \times$  :  $[[[0, 2], -\lambda], [[2, 3], \lambda]]$
- $(1-y)^{-\lambda} \times$  :  $[[[1, 2], -\lambda], [[2, 3], \lambda]]$
- Homogenization : `[[["homog", [2, 3]]]]`
- $\tilde{K}_x^{\mu, \lambda} : [[0, 0, \lambda, \mu], [0, 0, -\lambda - \mu]]$
- $\tilde{K}_y^{\mu, \lambda} : [[1, 3], \lambda, [1, \mu], [[1, 3], -\lambda - \mu]]$
- $\tilde{K}_{x, (x,y) \mapsto (x \mapsto \frac{x}{y})}^{\mu, \lambda} : [\text{"perm"}, [2, 1, 0, 4, 3]] \rightarrow [[0, 0, \lambda, \mu], [0, 0, -\lambda - \mu]] \rightarrow [\text{"perm"}, [2, 1, 0, 4, 3]]$

$$(\tilde{K}_x^{\mu,\lambda}u)(x,y) = \frac{x^{-\mu-\lambda}}{\Gamma(\mu+1)} \begin{pmatrix} \int_0^x (x-t)^\mu t^\lambda \frac{u(t,y)}{t-x} dt \\ \int_0^x (x-t)^\mu t^\lambda \frac{u(t,y)}{y} dt \\ \int_0^x (x-t)^\mu t^{\lambda-1} u(t,y) dt \end{pmatrix} = \begin{pmatrix} K_x^{\mu+1,\lambda} \frac{xu}{x-y} \\ K_x^{\mu+1,\lambda} \frac{yu}{x} \\ K_x^{\mu+1,\lambda} u \end{pmatrix}$$

$$K_x^{\mu-\lambda,\lambda}u(x,y) = \frac{1}{\Gamma(\mu-\lambda)} \int_0^1 t^{\lambda-1} (1-t)^{\mu-\lambda-1} u(tx,y) dt, \quad x^m y^n \mapsto \frac{\Gamma(\lambda+m)}{\Gamma(\mu+m)} x^m y^n$$

$$K_y^{\mu-\lambda,\lambda}u(x,y) = \frac{1}{\Gamma(\mu-\lambda)} \int_0^1 t^{\lambda-1} (1-t)^{\mu-\lambda-1} u(tx,y) dt, \quad x^m y^n \mapsto \frac{\Gamma(\lambda+n)}{\Gamma(\mu+n)} x^m y^n$$

$$K_{x,(x,y)\mapsto(x,\frac{x}{y})}^{\mu-\lambda,\lambda}u(x,y) = \frac{1}{\Gamma(\mu-\lambda)} \int_0^1 t^{\lambda-1} (1-t)^{\mu-\lambda-1} u(tx,ty) dt, \quad x^m y^n \mapsto \frac{\Gamma(\lambda+m+n)}{\Gamma(\mu+m+n)} x^m y^n$$

```
[0] M=os_md.mc2grs(0,0);
[[[0,1],[2,3]],[1,0,0]], [[[0,1],[2,4]],[1,0,0]],...
[1] M1=os_md.mc2grs(M, [[0,1],a], [[0,2],b], [[0,3],c]]);
[[[0,1],[2,3]],[1,a,0]], [[[0,1],[2,4]],[1,a,-b]],...
[2] os_md.mc2grs(M1,"deg"); /* Get kappa */
a+b+c
[3] os_md.mc2grs(M1,["homog",[2,3]]); /* homogenize */
[[[0,1],[2,3]],[1,a,0]], [[[0,1],[2,4]],[1,a,-b]],...,
[[[1,4],[2,3]],[1,-a,-a-b-c]]]
[4] F1=os_md.mc2grs(M1,[d]);
[[[0,1],[2,3]],[1,a+d,0],[1,0,0],[1,0,b+c]], [[[0,1],[2,4]],[1,a+d,-b],[1,0,-b],
[1,0,-a-b-c-d]],...
[5] os_md.mc2grs(F1,"get"); /* All residue matrices */
[[[0,1],[1,a+d],[2,0]],[[0,2],[1,b+d],[2,0]],[[0,3],[1,c+d],[2,0]],[[0,4],
[1,-a-b-c-d],[2,-d]],[[1,2],[2,0],[1,a+b]],[[1,3],[2,0],[1,a+c]],[[1,4],[2,-a],
[1,-a-b-c-d]],[[2,3],[2,0],[1,b+c]],[[2,4],[2,-b],[1,-a-b-c-d]],[[3,4],[2,-c],
[1,-a-b-c-d]]]
[6] os_md.mc2grs(F1,[-d])==M1; /* middle convolution */
1
[7] os_md.mc2grs(F1,["get",0]); /* GRS for the variable x0 */
[[[0,1],[2,0],[1,a+d]],[[0,2],[2,0],[1,b+d]],[[0,3],[2,0],[1,c+d]],
[[0,4],[2,-d],[1,-a-b-c-d]]]
[8] os_md.mc2grs(F1,["get",0]|dviout=-1);
\begin{Bmatrix}
A_{01} & A_{02} & A_{03} & A_{04} \\
[0]_2 & [0]_2 & [0]_2 & [-d]_2 \\
a+d & b+d & c+d & -a-b-c-d
\end{Bmatrix}
\end{Bmatrix}
[9] os_md.mc2grs(F1,["get",0]|dviout=1); /* GRS for the variable x0 */

$$\left\{ \begin{array}{cccc} A_{01} & A_{02} & A_{03} & A_{04} \\ [0]_2 & [0]_2 & [0]_2 & [-d]_2 \\ a+d & b+d & c+d & -a-b-c-d \end{array} \right\}$$

[10] os_md.mc2grs(F1,"get")$ /* GRS of KZ equation */
```

$$\left\{ \begin{matrix} A_{01} & A_{02} & A_{03} & A_{04} & A_{12} & A_{13} & A_{23} & A_{14} & A_{24} & A_{34} \\ [0]_2 & [0]_2 & [0]_2 & [-d]_2 & [0]_2 & [0]_2 & [0]_2 & [-a]_2 & [-b]_2 & [-c]_2 \\ a+d & b+d & c+d & -a-b-c-d & a+b & a+c & b+c & -a-b-c-d & -a-b-c-d & -a-b-c-d \end{matrix} \right\}$$

[11] os\_md.mc2grs(F1,"show" | dviout=1)\$ /\* simultaneous eigenspaces \*/

$$\begin{aligned} [A_{01} : A_{23}] &= \{[a+d:0], [0:0], [0:b+c]\}, \\ [A_{01} : A_{24}] &= \{[a+d:-b], [0:-b], [0:-a-b-c-d]\}, \\ [A_{01} : A_{34}] &= \{[a+d:-c], [0:-c], [0:-a-b-c-d]\}, \\ [A_{02} : A_{13}] &= \{[b+d:0], [0:0], [0:a+c]\}, \\ [A_{02} : A_{14}] &= \{[b+d:-a], [0:-a], [0:-a-b-c-d]\}, \\ [A_{02} : A_{34}] &= \{[b+d:-c], [0:-c], [0:-a-b-c-d]\}, \\ [A_{03} : A_{12}] &= \{[c+d:0], [0:0], [0:a+b]\}, \\ [A_{03} : A_{14}] &= \{[c+d:-a], [0:-a], [0:-a-b-c-d]\}, \\ [A_{03} : A_{24}] &= \{[c+d:-b], [0:-b], [0:-a-b-c-d]\}, \\ [A_{04} : A_{12}] &= \{[-a-b-c-d:0], [-d:0], [-d:a+b]\}, \\ [A_{04} : A_{13}] &= \{[-a-b-c-d:0], [-d:0], [-d:a+c]\}, \\ [A_{04} : A_{23}] &= \{[-a-b-c-d:0], [-d:0], [-d:b+c]\}, \\ [A_{12} : A_{34}] &= \{[0:-c], [0:-a-b-c-d], [a+b:-c]\}, \\ [A_{13} : A_{24}] &= \{[0:-b], [0:-a-b-c-d], [a+c:-b]\}, \\ [A_{14} : A_{23}] &= \{[-a:0], [-a-b-c-d:0], [-a:b+c]\} \end{aligned}$$

[12] os\_md.mc2grs("322,52,52,43","show0" | dviout=1)\$  
/\* spectral type of simultaneous eigenspace decomposition \*/  
 $2^2 1^3, 1^7, 1^7, 2^2 1^3, 1^7, 1^7, 21^5, 1^7, 1^7, 1^7, 1^7, 1^7, 1^7, 1^7, 1^7$

[13] os\_md.mc2grs(F1,"spct" | dviout=1)\$ /\* spectral type of KZ equation \*/

|       | $x_0$ | $x_1$ | $x_2$ | $x_3$ | $x_4$ | idx |
|-------|-------|-------|-------|-------|-------|-----|
| $x_0$ |       | 21    | 21    | 21    | 21    | 2   |
| $x_1$ | 21    |       | 21    | 21    | 21    | 2   |
| $x_2$ | 21    | 21    |       | 21    | 21    | 2   |
| $x_3$ | 21    | 21    | 21    |       | 21    | 2   |
| $x_4$ | 21    | 21    | 21    | 21    |       | 2   |

[14] os\_md.mc2grs("21,21,21,21","get" | dviout=1)\$ /\* GRS of KZ equation \*/

$$\left\{ \begin{matrix} A_{01} & A_{02} & A_{03} & A_{04} & A_{12} & A_{13} & A_{23} & A_{14} & A_{24} & A_{34} \\ [0]_2 & [0]_2 & [0]_2 & [d]_2 & [0]_2 & [0]_2 & [0]_2 & [-a-d]_2 & [-b-d]_2 & [-c-d]_2 \\ a & b & c & -a-b-c-2d & a+b+2d & a+c+2d & b+c+2d & -a-b-c-2d & -a-b-c-2d & -a-b-c-2d \end{matrix} \right\}$$

[15] os\_md.mc2grs([[[2,3],[0,4]],[1,a,b]], [[[0,1],[2,3]],[1,c,d]]],"sort");  
[[[0,1],[2,3]],[1,c,d]], [[[0,4],[2,3]],[1,b,a]]]

[16] os\_md.mc2grs(F1,[ "eigen",[0,1]]); /\* decomp. of eigenspaces \*/  
[[a+d,[[1,0]],[[1,-b]],[[1,-c]]],[0,[[1,0],[1,b+c]],[[1,-b],[1,-a-b-c-d]]],  
[[1,-c],[1,-a-b-c-d]]]

[17] os\_md.mc2grs(F1,[ "rest",[0,1]]); /\* bry GRS for a sing. line \*/  
[[a+d,[[1,a+b+d]],[[1,a+c+d]],[[1,-2\*a-b-c-2\*d]]],[0,[[1,a+b+d],[1,0]],[[1,a+c+d],

```

[1,0]], [[1,-a-b-c-d],[1,-a-d]]]
[18] os_md.mc2grs(F1,["rest0",[0,1]]); /* bry spectral types for sing. line */
[[a+d,1,1,1],[0,11,11,11]]
[19] os_md.mc2grs("322,52,52,43","rest0"); /* all bry spectral types */
[[[0,1],[a,11,11,11],[0,11111,11111,221]],[[0,2],[b,11,11,11],[0,11111,11111,221]],...]
[20] os_md.mc2grs("322,52,52,43","rest1"); /* non-rigid bry spectral types */
[[[0,1],[0,11111,11111,221]],[[0,2],[0,11111,11111,221]],[[0,3],[2*c,111,111,111],[0,1111,1111,211]],[[0,4],[2*d1,111,111,111]]]
[21] os_md.mc2grs("322,52,52,43","rest1"|dviout=1); /* non-rigid bry spectral types */

[01] : 221, 15, 15
[02] : 221, 15, 15
[03] : 111, 111, 111 211, 14, 14
[04] : 111, 111, 111

[22] os_md.mc2grs("322,52,52,43","rest0"|dviout=1); /* bry spectral type */

[01] : 11, 11, 11 221, 15, 15
[02] : 11, 11, 11 221, 15, 15
[03] : 111, 111, 111 211, 14, 14
[04] : 11, 11, 11 11, 11, 11 111, 111, 111
[12] : 11, 11, 11 11, 11, 11 21, 111, 111
[13] : 1, 1, 1 21, 111, 111 21, 111, 111
[14] : 1, 1, 1 1, 1, 1 1, 1, 1 11, 11, 11 11, 11, 11
[23] : 1, 1, 1 21, 111, 111 21, 111, 111
[24] : 1, 1, 1 1, 1, 1 1, 1, 1 11, 11, 11 11, 11, 11
[34] : 1, 1, 1 1, 1, 1 1, 1, 1 11, 11, 11 11, 11, 11


[23] os_md.mc2grs("322,52,52,43","rest"|dviout=-1); /* bry Riemann Scheme */

[01] : a → { -c - d1 - d2 c - d1 -a - 2c
 a + b + 2c + 2d1 + d2 a + 2c + 2d1 -a - b - 2c - 2d1 }
0 → { -c - d1 - d2 c - d1 [-2c]2
 a + b + 2c + 2d1 + d2 a + 2c + 2d1 [-b - 2c - 2d1]2
 0 -a + 2c - 2d1 b + 4d1
 a + b + 4c + 4d1 + 2d2 0
 -a - b - 2c - 2d1 - 2d2 -a - 2d1 }
[02] : b → { -c - d1 - d2 -c - d1 -b
 a + b + 2c + 2d1 + d2 b + 2d1 -a - b - 2d1 }
...
[24] os_md.mc2grs("322,52,52,43","spct1"|dviout=1)$ /* all spectral types */

```

|       | $x_0$ | $x_1$ | $x_2$ | $x_3$ | $x_4$ | idx | reduction   |
|-------|-------|-------|-------|-------|-------|-----|-------------|
| $x_0$ |       | 52    | 52    | 43    | 322   | 2   | 22,22,31,22 |
| $x_1$ | 52    |       | 322   | 331   | 22111 | -22 |             |
| $x_2$ | 52    | 322   |       | 331   | 22111 | -22 |             |
| $x_3$ | 43    | 331   | 331   |       | 22111 | -24 |             |
| $x_4$ | 322   | 22111 | 22111 | 22111 |       | -48 |             |

[25] os\_md.mc2grs("322,52,52,43","show0"|dviout=1,fig=[6]);

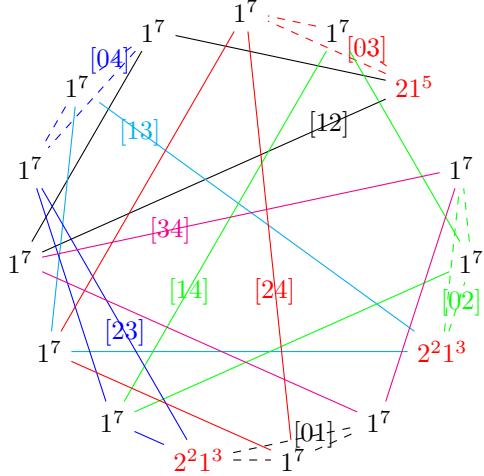

[26] K222=os\_md.mc2grs(0,["K",[2,2,2]])\$

[27] os\_md.mc2grs(K222,"spct1"|dviout=1);

|       | $x_0$  | $x_1$  | $x_2$  | $x_3$  | $x_4$  | idx  | reduction       |
|-------|--------|--------|--------|--------|--------|------|-----------------|
| $x_0$ |        | a2     | a2     | 441111 | 441111 | -8   | 62,62,41^4,41^4 |
| $x_1$ | a2     |        | a2     | 441111 | 441111 | -8   | 62,62,41^4,41^4 |
| $x_2$ | a2     | a2     |        | 441111 | 441111 | -8   | 62,62,41^4,41^4 |
| $x_3$ | 441111 | 441111 | 441111 |        | 72111  | -124 |                 |
| $x_4$ | 441111 | 441111 | 441111 | 72111  |        | -124 |                 |

[28] os\_md.mc2grs(K222,"get"|dviout=1,div=5);

$$\left\{ \begin{array}{ccccccccc} A_{01} & & A_{02} & & A_{03} & & A_{04} & & A_{12} \\ [0]_{10} & & [0]_{10} & & [0]_4 & & [a_1]_4 & & [0]_{10} \\ [-b_1 - b_2 - d_2 - a_1 - a_2 - e_2]_2 & & [-d_2 - a_1 - a_2 - c_1 - f_1 - c_2 - f_2]_2 & & [d_2]_4 & & [a_2]_4 & & [-b_1 - b_2 - e_2 - c_1 - f_1 - c_2 - f_2]_2 \\ & & & & b_1 + f_1 & & c_1 & & \\ & & & & b_1 + f_2 & & c_2 & & \\ & & & & b_2 + f_1 & & e_2 + c_1 & & \\ & & & & b_2 + f_2 & & e_2 + c_2 & & \\ A_{13} & A_{23} & A_{14} & A_{24} & & A_{34} & & & \\ [0]_4 & [c_1]_4 & [b_1]_4 & [f_1]_4 & & [0]_7 & & & \\ [e_2]_4 & [c_2]_4 & [b_2]_4 & [f_2]_4 & & -b_1 - b_2 - d_2 - a_1 - a_2 - e_2 - c_1 - f_1 - c_2 - f_2]_2 & & & \\ a_1 + f_1 & b_1 + a_1 & c_1 & 0 & & -b_1 - b_2 - d_2 - a_1 - a_2 - e_2 & & & \\ a_1 + f_2 & b_1 + a_2 & c_2 & d_2 & & -b_1 - b_2 - e_2 - c_1 - f_1 - c_2 - f_2 & & & \\ a_2 + f_1 & b_2 + a_1 & d_2 + c_1 & e_2 & & -d_2 - a_1 - a_2 - c_1 - f_1 - c_2 - f_2 & & & \\ a_2 + f_2 & b_2 + a_2 & d_2 + c_2 & d_2 + e_2 & & & & & \end{array} \right\}$$

[29] os\_md.mc2grs(K222,"show0"|dviout=1);

$3^21^6, 3^21^6, 71^5, 3^21^6, 3^21^6, 71^5, 3^21^6, 1^{12}, 1^{12}, 3^21^6, 1^{12}, 1^{12}, 71^5, 1^{12}, 1^{12}$

[30] os\_md.mc2grs(K222,"show0"|dviout=1,fig=0);

$01 : 23 = 3^21^6, 01 : 24 = 3^21^6, 01 : 34 = 71^5, 02 : 13 = 3^21^6, 02 : 14 = 3^21^6,$   
 $02 : 34 = 71^5, 03 : 12 = 3^21^6, 03 : 14 = 1^{12}, 03 : 24 = 1^{12}, 04 : 12 = 3^21^6,$

$$04 : 13 = 1^{12}, \quad 04 : 23 = 1^{12}, \quad 12 : 34 = 71^5, \quad 13 : 24 = 1^{12}, \quad 14 : 23 = 1^{12}$$

```
[31] I43=os_md.mc2grs(0,["I",[4,3]])$
[32] os_md.mc2grs(I43,"spct1"|dviout=1);
```

|       | $x_0$  | $x_1$  | $x_2$   | $x_3$   | $x_4$  | idx  | reduction                     |
|-------|--------|--------|---------|---------|--------|------|-------------------------------|
| $x_0$ |        | b1     | a11     | 3333    | 333111 | 2    | 81, 711, 333, 33111           |
| $x_1$ | b1     |        | 444     | 9111    | 441111 | 2    | 71, 44, 5111, 41 <sup>4</sup> |
| $x_2$ | a11    | 444    |         | 6111111 | 42222  | -64  |                               |
| $x_3$ | 3333   | 9111   | 6111111 |         | 3333   | -90  |                               |
| $x_4$ | 333111 | 441111 | 42222   | 3333    |        | -154 |                               |

```
[33] os_md.mc2grs(I43,"get"|dviout=1,div=5);
```

$$\left\{ \begin{array}{ccccccccc} & & A_{01} & & A_{02} & & A_{03} & & A_{04} \\ & -c - b_1 - b_2 - d_1 - d_2 - d_3 - a_1 - a_2 - e_1 - e_2 - a_3 & [0]_{11} & -c + b_1 - d_1 - d_2 - d_3 - a_1 - a_2 - a_3 & [0]_{10} & [d_1]_3 & [a_1]_3 & [e_1]_4 & A_{12} \\ & & & -c + b_2 - d_1 - d_2 - d_3 - a_1 - a_2 - a_3 & & [d_2]_3 & [a_2]_3 & [a_3]_3 & [e_2]_4 \\ & & & & & [d_3]_3 & c & c + e_1 & \\ & & & & & & c + e_2 & & \\ & & A_{13} & A_{23} & A_{14} & & A_{24} & & A_{34} \\ & -c - b_1 - b_2 + a_1 - e_1 - e_2 & [0]_9 & b_1 + a_1 & [b_1]_4 & [-c - b_1 - b_2 - e_1 - e_2]_4 & [0]_2 & [e_1]_3 & [0]_3 \\ & -c - b_1 - b_2 + a_2 - e_1 - e_2 & & b_1 + a_2 & [b_2]_4 & & [d_1]_2 & [e_2]_3 & \\ & -c - b_1 - b_2 - e_1 - e_2 + a_3 & & b_1 + a_3 & c + d_1 & & [d_2]_2 & & [-c - d_1 - d_2 - d_3 - a_1 - a_2 - a_3]_3 \\ & & & b_2 + a_1 & c + d_2 & & [d_3]_2 & & \\ & & & b_2 + a_2 & c + d_3 & & & & \\ & & & b_2 + a_3 & & & & & \end{array} \right\}$$

```
[42] os_md.mc2grs(I43,"show0"|dviout=1);
```

$$51^7, 32^4 1, 3^3 21, 71^5, 3^2 1^6, 3^3 1^3, 1^{12}, 1^{12}, 2^4 1^4, 1^{12}, 2^3 1^6, 1^{12}, 3^3 1^3, 2^4 1^4, 1^{12}$$

```
/* Search rigid spectral types whose extension to KZ eq. are identical
S:spectral type the spectral types with the same extension
S:number the list of all the above spectral types with rank S */
def sameKZ(S)
{
 if(type(S)==1){
 SS=os_md.spgen(S|eq=1,pt=4);
 for(L=[];SS!=[];SS=cdr(SS))
 if((TL=sameKZ(car(SS)))!=0 && TL[0]>TL[1]) L=cons(TL,L);
 return L;
 }
 S=os_md.s2sp(S|std=-1);
 KZ=os_md.mc2grs(S,0);
 Sp=os_md.mc2grs(KZ,"spct");
 for(L=[],I=1;I<5;I++){
 if(Sp[I][I]==2){
 for(S2=[],J=0;J<5;J++) if(I!=J) S2=cons(Sp[I][J],S2);
 S2=os_md.s2sp(S2|std=-1);
 if(S!=S2) L=cons(S2,L);
 }
 }
}
```

```

}

if(L==[]) return 0;
for(LS=[];L!=[];L=cdr(L)) LS=cons(os_md.s2sp(car(L)),LS);
LS=os_md.lsort(LS,[],"setminus");
return cons(os_md.s2sp(S),LS);
}

/* spectral types of rank N whose KZ ext. have idx=K for a variable */
def idxKZ(K,N)
{
 L=os_md.spogen(N|eq=1,pt=4,std=-1);
 for(LL=[];L!=[];L=cdr(L)){
 KZ=os_md.mc2grs(car(L),0);
 Sp=os_md.mc2grs(KZ,"spct");
 for(I=1;I<5;I++){
 if(Sp[I][I]==K){
 LL=cons(os_md.s2sp(car(L)),LL);
 break;
 }
 }
 }
 return reverse(LL);
}

/* the list with KZ eq. of rank N with a non-rigid restriction on a
singular hyperplanes */
def rest1KZ(N)
{
 L=os_md.spogen(N|eq=1,pt=4,std=-1);
 for(LL=[];L!=[];L=cdr(L)){
 KZ=os_md.mc2grs(car(L),0);
 R=os_md.mc2grs(KZ,"rest1");
 for(S=[];R!=[];R=cdr(R)){
 for(T=cdr(car(R));T!=[];T=cdr(T))
 S=cons(os_md.s2sp(car(T)[1]|short=1,std=-1),S);
 }
 if(S!=[]){
 S=os_md.lsort(S,[],1);
 LL=cons([os_md.s2sp(car(L)|short=1),S],LL);
 }
 }
 return reverse(LL);
}

```

```

/* non-rigid restricted eq. in the above (opt="basic") */
def rest2KZ(N)
{
 F=(getopt(opt)=="basic")?1:0;
 for(S=[] ,R=rest1KZ(N) ;R!=[] ;R=cdr(R)){
 TR=car(R)[1];
 if(F==1){
 T=os_md.chkspt(TR|opt="basic");
 if(type(T)==4) TR=os_md.s2sp(T|short=1,std=-1);
 }
 S=append(TR,S);
 return os_md.lsort(S,[],1);
 }
 /* sorted but same as above with index of rigidity (opt="basic") */
 def rest3KZ(N)
 {
 R=rest2KZ(N|opt=getopt());
 else R=rest2KZ(N);
 for(S=[] ;R!=[] ;R=cdr(R))
 S=cons([os_md.chkspt(car(R)|opt="idx"),car(R)],S);
 return reverse(qsort(S));
 }
}

67. newKZmat(k,l|raw=f,base=1,ext=1)

68. midKZ(l,b|raw=1,skip=m,kill=f,dviout=1)
 :: diagonalization of residue matrices of KZ equation
69. mcfamily(i,j,[m1,...],l|mult=1,max=1,fix=[p1,...],verb=1)h
 :: middle convolution of a family of commuting sets
 l=[l1,l2,...]: commuting family of sets i.e. lv are list with length(lv)>1 and

```

$$\ell_v \cap \ell_{v'} = \emptyset \text{ or } \ell_v \subset \ell_{v'} \text{ or } \ell_v \supset \ell_{v'}.$$

Here [...] is identified with a set {\dots}.

The function retruns  $\ell$  if  $i = j$  and it returns  $\ell'$  otherwise. Here  
if  $j \neq \ast$

$$\begin{aligned}
p_j^i(I) &:= \begin{cases} I & (\{i,j\} \cap I = \emptyset \text{ or } \{i,j\} \cap I = \{i,j\}), \\ I \cup \{i\} & (\{i,j\} \cap I = \{j\}), \\ I \setminus \{i\} & (\{i,j\} \cap I = \{i\}), \end{cases} \\
\ell_i \mapsto \ell'_i &:= [\bigcup_{I \in \ell_i, |p_i^j(I)| > 1} p_i^j I], \\
\ell \mapsto \ell' &= [[i,j], \ell'_1, \ell'_2, \dots].
\end{aligned}$$

When  $j = "\ast"$ ,

$$\begin{aligned} p_j^i(I) &:= I \setminus \{i\}, \\ \ell_i &\mapsto \ell'_i := [\bigcup_{I \in \ell_i, |p_i^j(I)| > 1} p_i^j I], \\ \ell &\mapsto \ell' = [m \setminus \{i\}, \ell'_1, \ell'_2, \dots]. \end{aligned}$$

- $\ell'$  is returned
- A family of commuting subset  $\ell$  is considered as a set of (sub)sets and they are sorted.
- If  $i = j$ ,  $I$  is returned
- If there is a duplications of elements, they are simplified to an element.
- $j = "\ast"$  :
- $\ell$  can be a list (set) of families of commuting subsets
  - In this case we get a list adding families of commuting sets applying the transformations
  - If  $i$  and  $j$  are lists, several transformations are indicated (cf. [lextn\(\)](#)).
  - $\ell = [[\text{"b"}]]$  : set  $\ell$  commuting families consisting of a set of 2 elements of  $Z$ . But if `fix=[n1, ...]` is indicated, the sets of 2 elements  $[n<sub>i</sub>, n<sub>j</sub>]$  are excluded.
  - $\ell = [[\text{"B"}]]$  : Same as above together with infinite points.
  - `mult=1` : apply indicated transformation several times until the result is stable
  - `max=1` : returns families of commuting subsets which are not contained other families (cf. [lmaxsub\(\)](#))

```
[0] os_md.mcfamily(0,1,[[0,3]],[[0,2]]);
[[0,1]]
[1] os_md.mcfamily(0,1,[[0,3]],[[1,2]]);
[[0,1],[0,1,2]]
[2] os_md.mcfamily(0,1,[[0,3]],[[2,3]]);
[[0,1],[2,3]]
[3] os_md.mcfamily(0,1,[[0,3]],[[2,3],[1,2,3]]);
[[0,1],[2,3],[0,1,2,3]]
[4] os_md.mcfamily(0,1,[[0,3]],[[[2,3],[1,2,3]]]);
[[[2,3],[1,2,3]],[[0,1],[2,3],[0,1,2,3]]]
[5] os_md.mcfamily(0,"*",[[0,3]],[[0,1,2]]);
[[1,2],[1,2,3]]
[6] os_md.mcfamily([0,1],[0,1,2],[[0,3]],[[[2,3],[1,2,3]]]);
[[[0,1],[2,3]],[[1,2],[1,2,3]],[[2,3],[1,2,3]],[[0,1],[2,3],[0,1,2,3]],
[[0,2],[0,2,3],[0,1,2,3]]]
[7] os_md.mcfamily([],[],[[0,3]],[[[["b"]]]]|fix=[2,3]);
[[[0,1]],[[0,2]],[[0,3]],[[1,2]],[[1,3]]]
[7] os_md.mcfamily([],[],[[0,3]],[[[["B"]]]]|fix=[2,3]);
[[[0,1]],[[0,2]],[[0,3]],[[1,2]],[[1,3]],[[0,2,3],[0,1,2,3]],[[1,2,3],[0,1,2,3]]]
[8] os_md.mcfamily([[0,1]],[[0,3]],[[0,3]],[[[0,2]]]|verb=1);
0 1 : [[0,2]] -> [[0,1]]
0 3 : [[0,2]] -> [[0,3]]
1 0 : [[0,2]] -> [[0,1],[0,1,2]]
1 2 : [[0,2]] -> [[1,2],[0,1,2]]
1 3 : [[0,2]] -> [[0,2],[1,3]]
```

```

[[[0,1]], [[0,2]], [[0,3]], [[0,1],[0,1,2]], [[0,2],[1,3]], [[1,2],[0,1,2]]]
[9] L=os_md.mcfamily([[0,1]], [[0,3]], [[0,3]], [[[0,2]]]|verb=1,mult=1,max=1)$
[10] os_md.llsymred(L,[[0,1],[2,3]]);
[[[0,1],[0,1,2]], [[0,2],[1,3]], [[0,2],[0,1,2]]]

```

70. `mcset(x,k,ℓ)`

:: middle convolution of a set

$k, \ell$  are lists regarded as finite sets

Return:  $[m, f]$  with a sorted list  $m$

$$[m, f] = \begin{cases} [\ell, 1] & (x \in \ell \supset k), \\ [\ell \cup \{x\}, 0] & (x \notin \ell \supset k), \\ [\ell \setminus \{x\}, 0] & (x \in \ell \not\supset k), \\ [\ell, 0] & (x \notin \ell \not\supset k). \end{cases}$$

```

[0] os_md.mcset(1,[2,3],[1,2,3]);
[[1,2,3],1]
[1] os_md.mcset(1,[2,3,4],[1,2,3]);
[[2,3],0]
[2] os_md.mcset(3,[1,2],[0,1,2]);
[[0,1,2,3],0]
[3] os_md.mcset(0,[0,1,2,3],[0,1,2]);
[[1,2],0]

```

71. `m2mc(ℓ, [a₀, aᵧ, a₁, c] | swap=1, small=1, MC=1)`

`m2mc(ℓ, s | small=1, int=0, swap=t)`

:: Addition+middle convolution of Pfaffian system

$du = (A_0 \frac{dx}{x} + A_y \frac{d(x-y)}{x-y} + A_1 \frac{d(x-1)}{x-1} + B_0 \frac{dy}{y} + B_1 \frac{d(y-1)}{y-1})u$  with respect to  $x$ -variable ( $\ell = [A_0, A_y, A_1, B_0, B_1]$ ).

When  $\ell$  is a spectral type or a Riemann scheme,  $s = "GRC", "GRSC", "extend", "Pfaff", "sp", "pairs", "irreducible", "All", "swap"$  in the latter case

- `m2mc(0,0)` : Shows usage

- $\ell$  is a list  $[A_0, A_y, A_1, B_0, B_1]$  or vector of 5 square matrices. If the size of the matrix is 1,  $\ell$  can be a list or vector of 5 scalars. Transforms  $\ell$  by additions  $A_0, A_y, A_1$  with the parameters  $a_0, a_y, a_1$ , respectively and then transforms by a middle convolution (convolution if  $MC=1$  is indicated) with the parameter  $c$  and returns the vector of the resulting 5 matrices.

If additions are omitted,  $[a_0, a_y, a_1, c]$  can be simply  $c$ .

If the middle convolution is omitted,  $[a_0, a_y, a_1]$  can be allowed.

- $\ell$  can be spectral type of  $x$ -variable or Riemann scheme. Spectral type or Riemann scheme is arranged in the order  $x = \infty, x = 0, x = y, x = 1$ . In this case  $a_0$  and  $s$  are 0 (returns  $[A_0, A_y, A_1, B_0, B_1]$ ) or the string given below.

- If  $\ell$  is a spectral type, it may be better to arrange the multiplicities from bigger ones (cf. the option `dep=[m,n]`).

- If  $a_0$  or  $s$  is a string, it has a special meaning.

- GRS : returns Generalized Riemann scheme.  $a_y$  can be "dviout".

- GRSC : same as above but containing generalized exponents for  $x = y = 0$  and  $x = y = 1$ .

- extend : returns 10 residue matrices corresponding to

- $[A_{x,y}, A_{x,0}, A_{x,1}, A_{x,\infty}, A_{y,0}, A_{y,1}, A_{y,\infty}, A_{0,1}, A_{0,\infty}, A_{1,\infty}]$

This list of this 10 matrices can be the parameter  $\ell$ .

If  $a_0 = "extend"$  and  $a_1 = "eigen"$ , we have a TeX source of residue matrices, their

eigenvalues and eigenvectors.

- **Pfaff** : returns Pfaffian system by string.  $a_y$  can be "dviout".
- **sp** : spectral types of residue matrices for  $x$ -variable and  $y$ -variables starting from  $x = y$
- **pairs, pair** : returns decompositions in the case when the system is reducible
- **irreducible** : returns parameters which give the conditions of irreducibility
- **All** : means that the above all parameters are indicated together with  $a_1 = "dviout"$ . Moreover if GRSC is indicated, this indication is valid in place of GRS.
- **operator=0** : do not show the system of Pfaffian form
- **swap** : returns the result under swapping  $x$ -variable and  $y$ -variable.  
If  $\text{swap}=t$  is indicated, it means another transformation:  
 $t = 1$  : swaps  $x$ -variable and  $y$ -variable.  
 $t = 2$  : transforms by the correspondence  $(x, y) \mapsto (x, \frac{x}{y})$ .  
 $t = [t_0, t_1, t_2]$  :  $(t_0, t_1, t_2)$  is a permutation of the numbers  $(0, 1, 2)$  and  $0, 1, 2$  means singular points  $0, 1, \infty$ , respectively.

Here the residue matrices of the extended KZ equation are

|          | $x$            | $y$            | 0              | 1              | $\infty$       |
|----------|----------------|----------------|----------------|----------------|----------------|
| $x$      |                | $A_{x,y}$      | $A_{x,0}$      | $A_{x,1}$      | $A_{x,\infty}$ |
| $y$      | $A_{x,y}$      |                | $A_{y,0}$      | $A_{y,1}$      | $A_{y,\infty}$ |
| 0        | $A_{x,0}$      | $A_{y,0}$      |                | $A_{0,1}$      | $A_{0,\infty}$ |
| 1        | $A_{x,1}$      | $A_{y,1}$      | $A_{0,1}$      |                | $A_{1,\infty}$ |
| $\infty$ | $A_{x,\infty}$ | $A_{y,\infty}$ | $A_{0,\infty}$ | $A_{1,\infty}$ |                |

$$\begin{cases} A_0 = A_{x,0}, \quad A_1 = A_{x,1}, \quad A_y = A_{x,y}, \\ B_0 = A_{y,0}, \quad B_1 = A_{y,1}, \\ A_0 + A_1 + A_y + B_0 + B_1 + A_{0,1} = 0, \\ \text{the sum of the elements of a line is 0} \end{cases}$$

Using the coordinate  $(x_0, x_1, x_2, x_3, x_4) = (x, y, 1, 0, \infty)$ , residue matrices are transformed into the matrices which acts vectors with the transposition o the first and second elements. 0 and 1 may be swapped. Then  $[c, a_1, a_y, a_0]$  define addition + middle convolution. Hence

```
M1=os_md.m2mc([a02,a01,a03,a12,a13],[0,0,lambda,mu]);
M2=os_md.m2mc(M1,[0,0,-lambda-mu]);
M3=os_md.m2mc(M2,"extend");
MM=os_md.mperm(M3,[1,0,2],1|mult=1);
```

gives the residue matrices corrsponding to Appell's  $F_1$  (cf. [m2grs\(\)](#),  $\hat{K}_x^{\mu,\lambda}$ ).

$$\begin{cases} A_{x,\infty} = -(A_{x,y} + A_{x,0} + A_{x,1}), \quad A_{y,\infty} = -(A_{x,y} + A_{y,0} + A_{y,1}), \\ A_{0,1} = A_{x,\infty} + A_{y,\infty} + A_{x,y}, \quad A_{0,\infty} = A_{x,y} + A_{x,1} + A_{y,1}, \quad A_{1,\infty} = A_{x,y} + A_{x,0} + A_{y,0}. \end{cases}$$

There are following options.

- **swap=1** : middle convolution after with swapping  $x$  and  $y$ .
- **small=1** : produces matrices of smaller size by  $\text{TeX}$ .
- **dep=[m,n]** : For an automatic generation of spectral exponents from a spectral type the  $n$ -th exponent of  $m$ -th singular point is determined by Fuchs condition.  $m = 1$  (and  $x = \infty$ ) and the last exponent

The first exponents except for the point  $x = \infty$  are normalized to 0.

- **int=0** : Allows a fractional multiple of parameters in the automatic generation of characteristic exponents.

```
[0] F1=os_md.m2mc([0,0,0,0,0],[a,b,c,d]);
[[a+d b c]
[0 0 0]
```

```

[0 0 0] [0 0 0]
[a b+d c]
[0 0 0] [0 0 0]
[0 0 0]
[a b c+d] [b -b 0]
[-a a 0]
[0 0 0] [0 0 0]
[0 c -c]
[0 -b b]]
[1] os_md.m2mc(F1, ["GRS", "dviout"]);

$$\left\{ \begin{array}{l} x=0 \quad x=y \quad x=1 \quad y=0 \quad y=1 \quad x=\infty \quad y=\infty \quad x=y=\infty \\ a+d \quad b+d \quad c+d \quad a+b \quad b+c \quad -a-b-c-d \quad -a-b-c-d \quad [-a-b-c-d]_2 \\ [0]_2 \quad [0]_2 \quad [0]_2 \quad [0]_2 \quad [0]_2 \quad [-d]_2 \quad [-b]_2 \quad -b-d \end{array} \right\}$$

[2] os_md.m2mc(F1, ["Pfaff", "dviout"]);

$$du = \left(\begin{pmatrix} a+d & b & c \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \frac{dx}{x} + \begin{pmatrix} 0 & 0 & 0 \\ a & b+d & c \\ 0 & 0 & 0 \end{pmatrix} \frac{d(x-y)}{x-y} + \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ a & b & c+d \end{pmatrix} \frac{d(x-1)}{x-1} \right. \\ \left. + \begin{pmatrix} b & -b & 0 \\ -a & a & 0 \\ 0 & 0 & 0 \end{pmatrix} \frac{dy}{y} + \begin{pmatrix} 0 & 0 & 0 \\ 0 & c & -c \\ 0 & -b & b \end{pmatrix} \frac{d(y-1)}{y-1} \right) u$$

[3] F2=os_md.m2mc(F1, [-a-d,0,0,e]);
[[-a-d+e 0 c 0]
[0 -a-d+e 0 c+d]
[0 0 0 0]
[0 0 0 0] [0 0 0 0]
[0 0 0 0]
[(-d*a-d*b-d^2)/(c) -d b+d+e c+d]
[0 0 0 0] [0 0 0 0]
[0 0 0 0]
[0 0 0 0]
[(-d*b)/(c+d) (-d*a-d*c-d^2)/(c+d) (c*b)/(c+d) c+d+e] [a+b+d c -c 0]
[0 0 0 0]
[(d*a+d*b+d^2)/(c) d -d 0]
[0 0 0 0] [c -c 0 0]
[-b b 0 0]
[0 0 c -c-d]
[0 0 (-c*b)/(c+d) b]]
[4] os_md.m2mc(F2, ["GRS", "dviout"]);

$$\left\{ \begin{array}{l} x=0 \quad x=y \quad x=1 \quad y=0 \quad y=1 \quad x=\infty \quad y=\infty \quad x=y=\infty \\ [-a-d+e]_2 \quad b+d+e \quad c+d+e \quad a+b \quad [b+c]_2 \quad [a-e]_2 \quad -a-b-c-d \quad a-b-e \\ [0]_2 \quad [0]_3 \quad [0]_3 \quad [0]_3 \quad [0]_2 \quad -b-c-e \quad -b-c-e \quad [-b-c-e]_3 \end{array} \right\}$$

[5] os_md.m2mc(F1, [-a-d,0,0,e]|small=1);
[[-a-d+e 0 1 0]
[0 -a-d+e 0 1]
[0 0 0 0]
```

```

[0 0 0 0] [0 0 0 0]
[0 0 0 0]
[-d*a-d*b-d^2 -d b+d+e 1]
[0 0 0 0] [0 0 0 0]
[0 0 0 0]
[0 0 0 0]
[-d*c*b -d*a-d*c-d^2 c*b c+d+e] [a+b+d 1 -1 0]
[0 0 0 0]
[d*a+d*b+d^2 d -d 0]
[0 0 0 0] [c -1 0 0]
[-c*b b 0 0]
[0 0 c -1]
[0 0 -c*b b]]
[6] os_md.m2mc("21,21,21,21", ["GRSC", "dviout"] | small=1);
{
$$\begin{matrix} x=0 & x=y & x=1 & y=0 & y=1 & x=\infty & y=\infty & x=y=\infty & x=y=0 & x=y=1 \\ a & b & c & a+b+2d & b+c+2d & -a-b-c-2d_1 & -a-b-c-2d & [-a-b-c-2d]_2 & [a+b+d]_2 & [b+c+d]_2 \\ [0]_2 & [0]_2 & [0]_2 & [0]_2 & [0]_2 & [d]_2 & [-b-d]_2 & -b & 0 & 0 \end{matrix}\}$$

[7] os_md.m2mc(0,0)$
m2mc(m,t) or m2mc(m,[t,s]) Calculation of Pfaff system of two variables
m : list of 5 residue mat. or GRS/spc for rigid 4 singular points
t : [a0,ay,a1,c], swap, GRS, GRSC, extend (eigen), sp, irreducible, pair, pairs, Pfaff, All
s : TeX, dviout, GRSC
option : swap, small, operator
Ex: m2mc("21,21,21,21", "All")

[8] os_md.m2mc("21,21,21,21", "All")$
```

Riemann scheme

$$\left\{ \begin{matrix} x=0 & x=y & x=1 & y=0 & y=1 & x=\infty & y=\infty & x=y=\infty & x=y=0 & x=y=\infty \\ a & b & c & a+b+2d & b+c+2d & -a-b-c-2d_1 & -a-b-c-2d & [-a-b-c-2d]_2 & [a+b+d]_2 & [b+c+d]_2 \\ [0]_2 & [0]_2 & [0]_2 & [0]_2 & [0]_2 & [d]_2 & [-b-d]_2 & -b & 0 & 0 \end{matrix} \right\}$$

Spectre types : 12,12,12,12 : 12,12,12,12

By the decompositions

$$\begin{aligned}
21, 21, 21, 21 &= 10, 10, 10, 01 \oplus 11, 11, 11, 20 \\
&= 10, 10, 01, 10 \oplus 11, 11, 20, 11 \\
&= 10, 01, 10, 10 \oplus 11, 20, 11, 11 \\
&= 01, 10, 10, 10 \oplus 20, 11, 11, 11 \\
&= 2(10, 10, 10, 10) \oplus 01, 01, 01, 01
\end{aligned}$$

irreducibility  $\Leftrightarrow \emptyset = \mathbb{Z} \cap$

$$\{d, c+d, b+d, a+d, a+b+c+2d\}$$

The equation in a Pfaff form is

$$\begin{aligned}
du = & \left( \begin{pmatrix} a & b+d & c+d \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \frac{dx}{x} \right. \\
& + \left( \begin{pmatrix} 0 & 0 & 0 \\ a+d & b & c+d \\ 0 & 0 & 0 \end{pmatrix} \frac{d(x-y)}{x-y} \right. \\
& + \left( \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ a+d & b+d & c \end{pmatrix} \frac{d(x-1)}{x-1} \right. \\
& + \left( \begin{pmatrix} b+d & -(b+d) & 0 \\ -(a+d) & a+d & 0 \\ 0 & 0 & 0 \end{pmatrix} \frac{dy}{y} \right. \\
& \left. \left. + \begin{pmatrix} 0 & 0 & 0 \\ 0 & c+d & -(c+d) \\ 0 & -(b+d) & b+d \end{pmatrix} \frac{d(y-1)}{y-1} \right) u \right)
\end{aligned}$$

## 72. `mcmgrs(g, r | dviout=k)`

:: Transform of simultaneous spectral exponents  $g$  of a KZ equation of several ( $\geq 5$ ) points in  $\mathbb{P}^1$   
The function handles a KZ equation such that the indices of the square matrices  $A_{i,j}$  in `mc2grs()`  
runs from 0 to  $N-1$ . If we regards the solution of hypergeometric function with several variables,  
the number of variables equals  $N-2$ . The system is

$$\begin{aligned}
\frac{\partial u}{\partial x_i} = & \sum_{j \in \{0,1,\dots,N-1\} \setminus \{i\}} \frac{A_{i,j}}{x_i - x_j} u \quad (i = 0, 1, \dots, N-1), \\
A_{i,i} = 0, \quad A_{i,j} = & A_{j,i}, \quad A_{i,N} := -(A_{i,0} + A_{i,1} + \dots + A_{i,N-1}), \\
A_{0,i,j} := & A_{0,i} + A_{0,j} + A_{i,j}.
\end{aligned}$$

The parameter  $g$  can be the list of simultaneous eigenvalues (multiplicities and eigenvalues) for the commutative pairs  $(A_{0,i}, A_{j,k})$  and  $(A_{0,i}, A_{0,i,j})$ . Here  $i, j, k$  are different indices in  $\{1, \dots, N\}$ . The former are  $N \times N-1 C_2$  pairs and the latter are  $N \times (N-1)$  pairs and there are  $\frac{N^2(N-1)}{2}$  pairs. If  $g$  is indicated by a spectral type or the corresponding string, then we have the following.

- If  $g$  is a positive integer different from 1, the trivial data of simultaneous eigenvalues of trivial hypergeometric function of  $g$  variables. ( $N = g+2$ ).
- Suppose  $g$  is defined by the spectral types (GRS or a string) of matrices 行列  $A_{0,N}, A_{0,1}, A_{0,2}, \dots, A_{0,N-1}$ . In this case the parameters with indices are used if `short=0` is indicated.

$r$  determines the following functions.

- 0 : returns the list of lists of simultaneous eigenvalues.
- `["deg"]` : returns  $\kappa$  ([ ] can be omitted).
- `[[i, j], λ]` : transforms by the addition  $A_{i,j} \mapsto A_{i,j} + λ$ ,  $A_{i,N} \mapsto A_{i,N} - λ$ ,  $A_{j,N} \mapsto A_{j,N} - λ$  ( $0 \leq i < j < N$ ).
- `[μ]` : transforms by middle convolution  $mc_{x_0, μ}$  of  $x_0$  variable (the algorithm is given by [O5]).
- `[[[i1, j1], λ1], ..., [μk], ...]` : transforms by successive additions and middle convolutions.
- `[[a1, ..., aN-1]]` : same as `[[[0, 1], a1], ..., [[0, N-1], aN-1]]`.
- `[[a1, ..., aN-1, μ]]` : same as `[[[0, 1], a1], ..., [[0, N-1], aN-1], [μ]]`.
- `["get", [I, J]]` : returns the list of simultaneous eigenvalues for  $[A_I, A_J] = 0$  with the header  $[I, J]$ .
- `["get", I]` : returns eigenvalues of  $A_I$  with the header  $I$ .
- `["get", i]` ( $0 \leq i \leq N$ ) : returns GRS for  $A_I$  with  $i \in I$ , which is GRS for the variable  $x_i$ .
- `dviout=1` : displays the result by using TeX.

dviout=-1 : returns the corresponding source file of T<sub>E</sub>X.

dviout=2 : outputs the corresponding source file of T<sub>E</sub>X without display.

- ["get"] : returns the list of eigenvalues of  $\frac{(N+1)N}{2}$  matrices.  
dviout=k can be indicated.
- ["get0", [I, J]], ["get0", I], ["get0", i] (0 ≤ i ≤ N), ["get0"] : "get0" are same as "get" but the header is omitted.
- ["show"] : displays simultaneous eigenvalues by using T<sub>E</sub>X.  
dviout=-1 can be indicated.
- ["show0"] : shows the multiplicities of simultaneous eigenvalues of  $\frac{N^2(N-1)}{2}$  pairs (the order is same as in "show").  
dviout=1, -1 can be indicated.
- ["spct"] : returns spectral types.  
Returns  $(N+1) \times (N+1)$  matrix whose  $(i, j)$  element is the spectral type of  $A_{i,j}$  if  $i \neq j$  and the index of rigidity for the variable  $x_i$  if  $i = j$ . のとき  $A_{i,j}$  ( $0 \leq i, j \leq N+1$ ).  
dviout=k can be indicated.
- ["mult",  $\ell_1, \dots, \ell_m$ ] : Puts  $g_0 = g$  and defines  $g_i = \text{mcmgrs}(g_{i-1}, \ell_i)$  for  $i = 1, \dots, m$  and returns  $g_m$ . Options are possible.

```
[0] os_md.mcmgrs("31,31,31,31,31", ["get"] |dviout=1)$
[1] os_md.mcmgrs("31,31,31,31,31", ["spct"] |dviout=1)$
[2] os_md.mcmgrs("31,31,31,31,31", ["show"] |dviout=1)$
```

give

$$\left\{ \begin{array}{ccccccccc} A_{01} & A_{02} & A_{03} & A_{04} & A_{05} & A_{12} & A_{13} & A_{14} & A_{15} \\ [0]_3 & [0]_3 & [0]_3 & [0]_3 & [e]_3 & [0]_3 & [0]_3 & [0]_3 & [-a-e]_3 \\ a & b & c & d & -a-b-c-d-3e & a+b+2e & a+c+2e & a+d+2e & -a-b-c-d-3e \\ A_{23} & A_{24} & A_{25} & A_{34} & A_{35} & & & & A_{45} \\ [0]_3 & [0]_3 & [-b-e]_3 & [0]_3 & [-c-e]_3 & & & & [-d-e]_3 \\ b+c+2e & b+d+2e & -a-b-c-d-3e & c+d+2e & -a-b-c-d-3e & & & & -a-b-c-d-3e \end{array} \right\}$$

|       | $x_0$ | $x_1$ | $x_2$ | $x_3$ | $x_4$ | $x_5$ | idx |
|-------|-------|-------|-------|-------|-------|-------|-----|
| $x_0$ |       | 31    | 31    | 31    | 31    | 31    | 2   |
| $x_1$ | 31    |       | 31    | 31    | 31    | 31    | 2   |
| $x_2$ | 31    | 31    |       | 31    | 31    | 31    | 2   |
| $x_3$ | 31    | 31    | 31    |       | 31    | 31    | 2   |
| $x_4$ | 31    | 31    | 31    | 31    |       | 31    | 2   |
| $x_5$ | 31    | 31    | 31    | 31    | 31    |       | 2   |

$$[A_{01} : A_{23}] = \{[a : 0], [0 : 0]_2, [0 : b + c + 2e]\},$$

$$[A_{01} : A_{24}] = \{[a : 0], [0 : 0]_2, [0 : b + d + 2e]\},$$

.....

$$[A_{01} : A_{012}] = \{[a : a + b + e], [0 : 0]_2, [0 : a + b + e]\},$$

$$[A_{01} : A_{013}] = \{[a : a + c + e], [0 : 0]_2, [0 : a + c + e]\},$$

.....

73. `mmc(l, [μ, a1, ..., an] | full=1, homog=1, mult=f)`

:: Addition and middle convolution of ODE of Schlesinger type and a KZ equation  
Transforms of the Fuchsian system of Schlesinger type

$$\frac{du}{dx} = \sum_{j=1}^n \frac{A_j}{x - x_j} u$$

and the KZ type equation

$$\frac{\partial u}{\partial x_i} = \sum_{j \in \{0, \dots, n\} \setminus \{i\}} \frac{A_{i,j}}{x_i - x_j} u \quad (i = 0, \dots, n)$$

by additions and middle convolutions.

We put  $\ell = [A_1, \dots, A_n]$  or  $\ell = [A_{0,1}, \dots, A_{0,n}, A_{1,2}, \dots, A_{1,n}, \dots, A_{n-1,n}]$  ( $\frac{n(n+1)}{2}$  elements) for the former system or latter equation, respectively. If  $g$  is a list of rational numbers or functions, they are regarded as matrices of size  $1 \times 1$ .

Moreover  $\ell$  can be a spectral type or GRS. Then for the latter KZ equation  $\ell$  should be rigid and correspond to the differential equation of the variable  $x_0$ .

- $[\mu, a_1, \dots, a_n]$  : Adds  $a_j$  to  $A_j$  (or  $A_{0,j}$ ) and then transforms the resulting matrices by the middle convolution  $mc_\mu$  with respect to the variable  $x$  (or  $x_0$ ).

We may indicate  $[a_1, \dots, a_n]$  or  $[\mu]$  by one of the above transformation.

- $mult=f$  :  $f = 0$  means the former system of Schlesinger type and  $f = 1$  means a KZ equation.

By default,  $\ell$  corresponds to a system of Schleginger type if the number of elements of  $\ell$  is smaller than 6 and to a KZ system otherwise. If  $\ell$  is a spectral type,  $\ell$  corresponds to a KZ system by default.

- $homog=1$  : transforms by the homogeneous middle convolution for a KZ system, namely, middle convolution with respect to  $\mu$  together with an addition of the last residue matrix by  $-\mu$ .

#### 74. `kzext([a1, a2, ..., am] | perm=σ)`

:: extend to full KZ residue matrices

Consider the homogenized KZ equation

$$\frac{\partial u}{\partial x_i} = \sum_{\nu \in \{0, \dots, n\} \setminus \{i\}} \frac{A_{i,\nu} u}{x_i - x_\nu} \quad (0 \leq i \leq n)$$

satisfies

$$A_{i,j} = A_{j,i}, \quad A_{i,i} = 0, \quad A_{i,n+1} = \sum_{\nu=0}^n A_{i,\nu}, \quad \sum_{0 \leq i < j \leq n} A_{i,j} = 0.$$

If  $m = \frac{1}{2}n(n+1)$  or  $m = \frac{1}{2}n(n+1) - 1$ ,  $a_1, \dots, a_m$  are  $A_{0,1}, \dots, A_{0,n}, A_{1,2}, \dots, A_{1,n}, A_{2,3}, \dots$  and the matrix  $(A_{i,j})_{\substack{0 \leq i \leq n \\ 0 \leq j \leq n}}$  is returned,

- If `perm=σ` is indicated.  $[A_{\sigma(0),\sigma(1)}, \dots, A_{\sigma(0),\sigma(n)}, A_{\sigma(1),\sigma(2)}, \dots, A_{\sigma(1),\sigma(n)}, A_{\sigma(2),\sigma(3)}, \dots, A_{\sigma(n-3),\sigma(n)}, A_{\sigma(n-2),\sigma(n)}]$  is returned. Here  $\sigma$  is a permutation given by a list of  $n+1$  numbers in  $\{0, \dots, n+1\}$  or a transposition given by a list of pair of two numbers.

```
[0] os_md.kzext([1,2,3,4,5]);
[0 1 2 3 -6]
[1 0 4 5 -10]
[2 4 0 -15 9]
[3 5 0 0 -8]
[-6 -10 9 -8 0]
[1] os_md.kzext([1,2,3,4,5] | perm=[1,2]);
[2,1,3,4,-15]
```

#### 75. `mcPfaff(p, v, c | ad=ℓ, verb=k, raw=r, top=1, keep=1)`

:: Middle convolution of Pfaffian system with singularities in hyperplanes Calculate a middle convolution of the Pfaffian system

$$du = \sum_j a_j d \log f_j \cdot u$$

- $p = [[f_1, a_1], [f_2, a_2], \dots]$  : give a Pfaffian system  
 $H_j = \{f_j = 0\}$  : hyperplane of the space of variables  $v$   
 $a_j$  is a residue matrix along  $H_j$   
 $v = [x_1, \dots, x_n]$  : list of variables
- $c = [x, \mu]$  : Apply middle convolution  $\text{mc}_{x, \mu}$  to Pfaffian system
  - $c = [0, g, \lambda]$  : Apply  $\text{adPfaff}(p, v, [g, \lambda])$
  - $c = [1, t]$  : Apply  $\text{trPfaff}(p, v, t)$
  - $c = [0, [g_1, \lambda_1], [g_2, \lambda_2], \dots]$  : we apply  $\text{adPfaff}(p, v, [g_1, \lambda_1], [g_2, \lambda_2], \dots)$
  - $c = [[c_0], [c_1], \dots]$  : Successively apply  $\text{adPfaff}(*, v, c_i)$ .
  - $c = [x, \mu, \lambda]$  : Apply  $\text{Ad}(x^{-\mu-\lambda}) \circ_{x, \mu} \text{Ad}(\mapsto x^\lambda u)$  to Pfaffian system, which corresponds to

$$u \mapsto \frac{x^{-\mu}}{\Gamma(\mu - \lambda)} \int_0^x t^{\lambda+1} u(t) (x-t)^{\mu-\lambda-1} \frac{dt}{t} = \frac{1}{\Gamma(\mu - \lambda)} \int_0^1 s^{\lambda+1} u(sx) (1-s)^{\mu-\lambda-1} \frac{ds}{s},$$

$$x^m \mapsto \frac{x^m}{\Gamma(\mu - \lambda)} \int_0^1 s^{\lambda+m+1} (1-s)^{\mu-\lambda-1} \frac{ds}{s} = \frac{\Gamma(\lambda + m + 1)}{\Gamma(\mu + m + 1)} x^m = \frac{\Gamma(\lambda + 1)}{\Gamma(\mu + 1)} \cdot \frac{(\lambda + 1)_m}{(\mu + 1)_m} x^m$$

- $\text{ad}=\ell$  : After the addition  $\text{adPfaff}(p, v, \ell)$ , we apply the above transformation
- $\text{top}=1$ : If there appears a new hyperplane, it is inserted at the top (default: the last position) of the list
- $\text{keep}=1$ : A residue matrix is 0, it is not deleted from the list if it appeared by the convolution.
- $\text{verb}=1$ : show process of calculation
- $\text{verb}=2$ : more precise in the above
- $\text{raw}=r$ : return intermediate calculation according to  $k = 1(\text{conv}), 2(\text{ker}), 3(\text{mc}), 4(\text{simp})$

Gauss hypergeometric system :  $\sum_{n=0}^{\infty} \frac{(\alpha)_n (\beta)_n}{(1+\gamma)_n n!} x^n$

```
[0] H=os_md.mcPfaff([[x,0]], [x], [x,gamma,beta]|ad=[x-1,-alpha])$
[1] os_md.showPfaff(H|div=2)$ /* show eq. with two matrices for a line */
[2] os_md.showPfaff(H|type="GRS",ODE=x); /* show Generalized Riemann Scheme */
```

$$du = \left( \begin{pmatrix} 0 & -\alpha \\ 0 & -\gamma \end{pmatrix} \frac{dx}{x} + \begin{pmatrix} 0 & 0 \\ \beta & -(\alpha + \beta - \gamma) \end{pmatrix} \frac{d(x-1)}{x-1} \right) u,$$

$$\left\{ \begin{array}{ccc} x=0 & x=1 & x=\infty \\ -\gamma & -\alpha - \beta + \gamma & \alpha \\ 0 & 0 & \beta \end{array} \right\}$$

Pfaffian system satisfied by  ${}_3F_2$  :  $\sum_{n=0}^{\infty} \frac{(a)_n (b)_n (c)_n}{(p+1)_n (q+1)_n n!} x^n$

```
[3] H3=os_md.mcPfaff([[x,0],[x-1,-a]], [x], [[x,p,b],[x,q,c]]);
[[x,[0 -a 0]
[0 -p 1]
[0 0 -q]],
[x-1,[0 0 0]
[0 0 0]
[c*b -p^2+(a+b+c)*p+(-b-c)*a-c*b p+q-a-b-c]]]
[4] os_md.showPfaff(H3|small=1)$ /* show equation */
[5] os_md.showPfaff(H3|ODE=x,type="GRS")$ /* show GRS */
[6] os_md.showPfaff(H3|ODE=x,type="spct")$ /* show spetral type */
```

$$du = \left( \begin{pmatrix} 0 & -a & 0 \\ 0 & -p & 1 \\ 0 & 0 & -q \end{pmatrix} \frac{dx}{x} + \begin{pmatrix} 0 & 0 & 0 \\ cb & -(p^2 + (-a-b-c)p + (b+c)a + cb) & p+q-a-b-c \\ 0 & 0 & 0 \end{pmatrix} \frac{d(x-1)}{x-1} \right) u,$$

$$\left\{ \begin{array}{lll} x=0 & x=1 & x=\infty \\ -p & [0]_2 & a \\ -q & p+q-a-b-c & b \\ 0 & & c \end{array} \right\}$$

$$\left\{ \begin{array}{lll} x=0 & 1 & \infty \\ 111 & 21 & 111 \end{array} \right\}$$

Pfaffian system satisfied by  $\sum_{m,n \geq 0} \frac{(a)_{m+n}(b)_{m+n}(d)_m(f)_n}{(c+1)_{m+n}(e+1)_m(g+1)_n m! n!} x^m y^n$

```
[7] P0=os_md.mcPfaff([[x,0],[x-1,-a]], [x], [x,c,b])$

[8] P1=os_md.trPfaff(P0, [x], [x+y])$

[9] P2=os_md.mcPfaff(P1, [x,y], [x,e,d])$

[10] P3=os_md.mcPfaff(P2, [x,y], [y,g,f]|verb=1)$ /* show process */

Ad: [y,f]

middle convolution by variable y with parameter -f+g

which contains new parameter g

Add hyperplane x+1

Add hyperplane x-1

Calculate invariant subspace

Calculate quotient

rank 4 -> 16 -> 7

Check better base

Delete hyperplane x+1

Ad: [y,-g]

hyperplanes 5 -> 6
```

[7], [9]~[10] can be replaced by

```
[7] P0=os_md.mcPfaff([[x,0]], [x], [[0,x-1,-a], [x,c,b]])$

[10] P3=os_md.mcPfaff(P1, [x,y], [[x,e,d], [y,g,f]])$
```

```
[11] os_md.lpair(P3,0)[0]; /* singular locus */

[x+y, x+y-1, x, y, y-1, x-1]

[12] os_md.delopt(P3,y|get=1); /* residue matrix */

[-g 0 0 0 0 0]

[0 -g 0 0 0 0]

[1 0 d 0 0 -d 0]

[0 1 0 0 0 0 -d]

[0 0 a 0 0 -a 0]

[0 0 c 0 0 -c -1]

[0 0 0 0 0 0 -g]

[13] os_md.showPfaff(P3|small=1)$ /* show equation */
```

$$\begin{aligned}
du = & \left( \begin{pmatrix} -(c+d-e+f-g) & -1 & -(fc+d^2+(-e+f)d-fe) & -f & 0 & d(d-e+f) & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix} \frac{d(x+y)}{x+y} \right. \\
& + \left( \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ (b-c)(a-c) & -(a+b-c+d-e+f-g) & f(b-c)(a-c) & -f(a+b-c+d-e) & -fdb & fd(a+b-c) & d(d-e) \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix} \frac{d(x+y-1)}{x+y-1} \right. \\
& + \left( \begin{pmatrix} d-e+f & 0 & fc+d^2+(-e+f)d-fe & f & 0 & -d(d-e+f) & 0 \\ 0 & d-e & 0 & 0 & 0 & 0 & -d(d-e) \\ -1 & 0 & -(c+d) & -1 & 0 & d & 0 \\ 0 & 0 & 0 & -e & 0 & 0 & 0 \\ 0 & 0 & -a & 0 & 0 & 0 & 0 \\ 0 & 0 & -c & -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & -d \end{pmatrix} \frac{dx}{x} \right. \\
& + \left( \begin{pmatrix} -g & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -g & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & d & 0 & 0 & -d & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & -d \\ 0 & 0 & a & 0 & 0 & -a & 0 \\ 0 & 0 & c & 0 & 0 & -c & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & -g \end{pmatrix} \frac{dy}{y} \right. \\
& + \left( \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix} \frac{d(y-1)}{y-1} \right. \\
& + \left( \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & f & -f(b-c)(a-c) & f(a+b-c+d-e) & fdb & -fd(a+b-c) & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & (b-c)(a-c) & -(a+b-c+d-e) & -db & d(a+b-c) & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix} \frac{d(x-1)}{x-1} \right) u
\end{aligned}$$

```
[14] os_md.showPfaff(P3|type="GRS",small=1,infty=[x,y,0]); /* show GRS */
[[x+y,[[6,0],[1,-c-d+e-f+g]]],[x+y-1,[[6,0],[1,-a-b+c-d+e-f+g]]],[x,[.....
```


.....

$$\left\{ \begin{array}{ccccccc}
x+y=0 & x+y=1 & x=0 & y=0 & y=1 & x=1 & x=\infty \quad y=\infty \quad \infty \\
[0]_6 & [0]_6 & [-e]_3 & [-g]_3 & [0]_6 & [0]_6 & [d]_3 \quad [f]_3 \quad [a]_3 \\
-c-d+e-f+g & -a-b+c-d+e-f+g & [0]_3 & [0]_3 & -a-b+c+d-f+g & -a-b+c-d+e+f & a-g \quad a-e \quad [b]_3 \\
& & -c+f & -c+d & & & a \quad a \quad d+f \\
& & & & & & b-g \quad b-e \quad b
\end{array} \right\}$$

```
[15] os_md.showPfaff(P3|type="spct",infty=[x,y,0]); /* show spectral type */
[[x+y,[6,1]],[x+y-1,[6,1]],[x,[3,3,1]],[y,[3,3,1]],[y-1,[6,1]],[x-1,[6,1]],
[x=\infty,[3,1,1,1,1]],[y=\infty,[3,1,1,1,1]],[\infty,[3,3,1]]]
```

$$\left\{ \begin{array}{ccccccc}
x+y & x+y-1 & x & y & y-1 & x-1 & x=\infty \quad y=\infty \quad \infty \\
61 & 61 & 331 & 331 & 61 & 61 & 31111 \quad 31111 \quad 331
\end{array} \right\}$$

Singular locus of equations (cf. [Matsubara-Oshima])

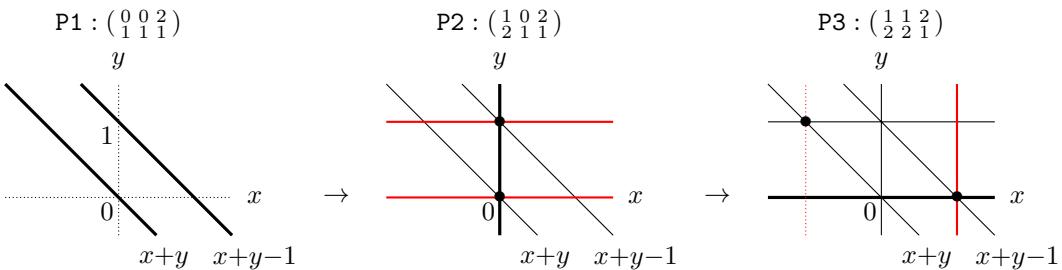

```
/* P4: boundary equation of P3 w.r.t. singular hyperplane x=0 for char. exp. 0 */
```

```

[16] os_md.brPfaff(P3,[x,y],[0,0,0]);
Indicate a singular hyperplane in [x+y,x+y-1,x,y,y-1,x-1]
[17] os_md.brPfaff(P3,[x,y],[x,x,"show"]);
[-e,0,-c+f]
[18] P4=os_md.brPfaff(P3,[x,y],[x,x,0]); /* boundary equation */
[[y,[0 -e*a (-d^2+e*d)*a]
[0 -c (-d+e)*c+f*d-f*e]
[0 0 -g]],[y-1,[0 0 0]
[0 0 0]
[f*e*b ((d-e)*b+(-d+e)*c-f*e)*a+((-d+e)*c-f*e)*b+(d-e)*c^2+f*e*c -a-b+c-f+g]]]
[19] os_md.showPfaff(P4|small=1)$
[20] os_md.showPfaff(P4|type="GRS",ODE=y)$
[[1,[[2,0],[1,-a-b+c-f+g]]],[0,[[1,-c],[1,-g],[1,0]]],[\infty,[[1,a],[1,b],[1,f]]]]
[21] R=os_md.showPfaff(P4|type="spct",ODE=y);
[[1,[2,1]],[0,[1,1,1]],[\infty,[1,1,1]]]
[22] SP=os_md.lpair(R,0)[1]; /* get spectral type */
[[2,1],[1,1,1],[1,1,1]]
[23] os_md.chkspt(SP|show=1)$ /* analyze spectral type */
points: 3
rank: 3
index: 2
reduct: 1 at [0 0 0] --> [[1],[1],[1]]
[24] os_md.s2sp(SP); /* spectral type in a string form */
21,111,111
[25] os_md.s2sp(@@);
[[2,1],[1,1,1],[1,1,1]]

$$du = \left(\begin{pmatrix} 0 & 0 & 0 \\ fb & ((d-e)b+(-d+e)c-fe)a+((-d+e)c-fe)b+(d-e)c^2+fec & -(a+b-c+f-g) \\ 0 & \frac{-da}{(d-e)c+fe} & \frac{dy}{y} \end{pmatrix} \frac{d(y-1)}{y-1} + \begin{pmatrix} 0 & -ea & \frac{-da}{(d-e)c+fe} \\ 0 & -c & \frac{-(c-f)}{(d-e)c+fe} \\ 0 & 0 & -g \end{pmatrix} \frac{dy}{y} \right) u,$$

$$\left\{ \begin{array}{ccc} y=1 & y=0 & y=\infty \\ [0]_2 & -c & a \\ -a-b+c-f+g & -g & b \\ 0 & 0 & f \end{array} \right\}$$

$$\left\{ \begin{array}{ccc} y=1 & 0 & \infty \\ 21 & 111 & 111 \end{array} \right\}$$

[26] os_md.ssPfaff(P3,[x,y]); /* singularities of hyperplane arrangement */
[[[y,x],[y,x,x+y]],[[y,x-1],[y,x-1,x+y-1]],[[y-1,x],[y-1,x,x+y-1]],
 [[y-1,x-1],[y-1,x-1]],[[y-1,x+1],[y-1,x+y]],[[y+1,x-1],[x-1,x+y]]]
[27] os_md.ssPfaff(P3,[x,y]|num=1);
[[[y,x],[0,2,3]],[[y,x-1],[1,3,5]],[[y-1,x],[1,2,4]],[[y-1,x-1],[4,5]],
 [[y-1,x+1],[0,4]],[[y+1,x-1],[0,5]]]
[28] os_md.ssPfaff(P3,[x,y]|conv=x); /* singularity appeared by convolution */

```

[y+1]

For example, the second term of the result [27] means that the three hyperplanes  $y = 0$ ,  $x - 1 = 0$ ,  $x + y - 1 = 0$  meet at the point  $y = 0$ ,  $x - 1 = 0$ , namely,  $(x, y) = 1$ .

[28] shows singular hyperplanes appeared by middle convolution of the variable  $x$ .

76. **brPfaff**( $p, v, b$ )

:: Bounday system of Pfaffian system with respect to a singularities hyperplane

$b = [h_b, v_b, e_b]$   $h_b$  : singular hyperplane,  $v_b$  : variable to be removed,  $e_b$  : characteristic exponent  
Calcutate boundary equation to the singular hyperplane defined by  $h_b$  with respect to the characteristic exponent  $e_b$ . The quation is expressed without the variable  $v_b$  ( $v_b$  ia a variable contained in the defineing equation of  $h_b$ ).

- If  $e_b$  is not a characteristic exponent (ex.  $e_b = []$ ) or  $e_b = []$ , the list of characteristic exponent is shown.
- If  $e_b = "all"$ , the list of all the characteristic exponents and the corresponding boudary equations is given.

77. **adPfaff**( $p, v, \ell | top=-1$ )

:: Addition of Pfaffian system with singularities in hyperplanes

Get addition of Pfaffian system (cf. **mcPfaff()**) determined by  $p, v$

- $\ell = [g, \lambda]$  : addition corresponds to  $u \mapsto g(x)^\lambda u$
- $\ell = [[g_1, \lambda_1], [g_2, \lambda_2], \dots]$  is possible
- Same as **mcPfaff**( $p, v, cons(0, \ell)$ )
- **top=-1**: If it is a new singular hyperplane, it will be placed at the last (default: top) of the list.

This can be indicated by indicated  $[g, \lambda, -1]$  in place of  $[g, \lambda]$ .

78. **trPfaff**( $p, v, t$ )

:: Coordinate transformation of Pfaffian system with singularities in hyperplanes

Get coordinate transformation of Pfaffian system (cf. **mcPfaff()**) determined by  $p, v$

- Transformation  $v = [x_1, x_2, \dots] \mapsto t = [h_1(x), h_2(x), \dots]$  such that the resultingsingularities are within a union of hyperplanes is allowed
- Same as **mcPfaff**( $p, v, cons(1, \ell)$ )
- If there are same hyperplanes in  $p$ , they are unified with the sum of corresponding residue matrices
- $v = [x_1], t = [x_1]$  : Pfaff system with the single variable  $x_1$ .
- for the equation of variables  $v = [x_1, \dots, x_n]$ , the ordinary differential equation with respect to the direction  $(c_1, \dots, c_n)$  is obtained by

`os_md.trPfaff(os_md.trPfaff(p, v, [c1*t, ..., cn*t]), [t], [t])`

```
[0] H=os_md.mcPfaff([[x,0],[x-1,-a]], [x], [x,c,b]);
[[x,[0 -a]
 [0 -c]],
[x-1,[0 0]
 [b -a-b+c]]];
[1] H2=os_md.trPfaff(H,[x,y],[x/y,y]);
[[x,[0 -a]
 [0 -c]],
[y,[0 a]
 [-b a+b]],
[x-y,[0 0]
 [b -a-b+c]]]
```

```

[2] os_md.trPfaff(H2,[x,y],[x/y,1/y]);
[[x,[0 -a]
 [0 -c]],
[x-1,[0 0]
 [b -a-b+c]]]
[3] os_md.trPfaff(H2,[x],[x]);
[[x,[0 -a]
 [0 -c]],
[x-y,[0 0]
 [b -a-b+c]]]

```

79. `showPfaff(p|raw=1,type=k,div=d,infty=v,ODE=x)`  
:: display Pfaffian system  
Display Pfaffian system

- `k = "equation"` or `k = 0` or default : show equation
- `k = "GRS"` or `k = 1` : show Generalized Riemann scheme
- `k = "form"` or `k = 2` : `iand(k,1)` : show Generalized Riemann scheme
- `k = "spct"` or `k = 3` : show spectral type
- `small=1` : show matrices in small size
- `raw=1` : get data without display
- `raw=-1` : get TeXsource without display
- `ODE=x` : regard as ordinary differential equation of variable  $x$   
By `os_md.lpair(os_md.showPhaff(h|type="spct",ODE=x,raw=1))` [1], the spectral type of the ODE is obtained.
- `div=d` :  $d$  terms in a line for a Pfaffian equation and `div=d` for generalized Riemann scheme (cf. option parameter of `mtotex()`) `infty=v` :  $v = [x_1, x_2, \dots]$  (characteristic exponents at  $x_i = \infty$ )
- See `mcPfaff()` for examples

80. `ssPfaff(p,v|num=1,conv=v1)`  
:: 3-codimensional singularities of arrangement of hyperplanes  
`p`: list of equations defining hyperplanes (can be the first argument of `mcPfaff()`)  
`v` : list of variables

- `num=1` : resulting hyperplanes are expressed by the numbers in `p`
- `conv=v1` : get singular hyperplanes by the convolution with the variable  $v_1$   
 $v_1$  should be the variables in `v`
- examples are given in `mcPfaff()`

81. `arHplane(p,v|num=1)`  
:: singularities of hyperplane arrangement Get all intersections of hyperplanes (cf. `ssPfaff()`)

- When  $v = [x_1, \dots, x_n]$ ,  $p_i$  in  $p = [p_0, p_1, \dots, p_m]$  is a polynomial of the variable  $x = (x_1, \dots, x_n)$  with degree 1 and the set  $\mathcal{A} := \{H_i \mid 0 \leq i \leq m\}$  of hyperplanes  $H_i := \{x \mid p_i(x) = 0\}$  is a hyperplane arrangement.
- Calculates  $L(\mathcal{A}) := \left\{ \bigcap_{H \in \mathcal{B}} H \mid \mathcal{B} \subset \mathcal{A} \right\}$  and  $\mathcal{A}_{\supset S} := \{H \in \mathcal{A} \mid S \subset H\}$  for  $S \in L(\mathcal{A})$  and returns a list of pairs corresponding to the pairs  $S$  and  $\mathcal{A}_{\supset S}$ .
- Let `R` be the list returned by this function. Then `R[k][0], R[k][1], ...` are pairs of  $k+1$ -codimensional intersections and hyperplanes containing the intersection.  
`R[1]` corresponds to `ssPfaff()`.
- $v = [x_1, \dots, x_n]$  is a list of variables and `R[k][i][0]` is the list of normalized  $k+1$  defining equations of the intersections  $S \in L(\mathcal{A})$ .

If `num=1` is indicated, the latter is a list of  $n + 1$ -dimensional vectors, where a vector  $[a_1, \dots, a_n, a_{n+1}]$  represents  $a_1x_1 + \dots + a_nx_n - a_{n+1}$ . Moreover, the number  $\nu$  in the sorted list `R[k][i][1]` represents the hypersurface  $p[\nu]$ .

- The list of normalized defining equations means as follows:

Suppose the top element of the  $j$ -th vector is its  $n_j$ -th element. Then the element equals 1 and the  $n_j$ -th elements of other vectors are 0 and moreover  $0 \leq n_0 < n_1 < \dots$

- Every  $p_i$  may be a list  $[p_i, *]$ , where the second elemnt is ignored.

```
[0] R=os_md.arHplane([x,y,z,x-1,y-1,z-1,x-y,y-z,z-x],[x,y,z]);
[[[[x],[x]],[[y],[y]],[[z],[z]],[[x-1],[x-1]],[[y-1],[y-1]],[[z-1],[z-1]],...
[2] RR=os_md.arHplane([x,y,z,x-1,y-1,z-1,x-y,y-z,z-x],[x,y,z]|num=1);
[[[[1 0 0 0]] [0],[[[0 1 0 0]] [1],[[[0 0 1 0]] [2],
[[1 0 0 1]] [3],...
[3] R[2]; /* 3-codimensional intersection intersections (points) */
[[[x,y,z],[x,y,z,x-y,y-z,-x+z]],[[x,y,z-1],[x,y,z-1,x-y]],[[x,y-1,z],
[x,z,y-1,-x+z]],...
[4] RR[2]; /* same as above by numbers */
[[[[1 0 0 0],[0 1 0 0],[0 0 1 0]] [0,1,2,6,7,8],[[[1 0 0 0],
[0 1 0 0],[0 0 1 1]] [0,1,5,6],...
[5] L=os_md.msort(os_md.m21(RR|flat=1), [1,0,1]); /* sorted by the second list */
[6] L1=os_md.lpair(L,0)[1]; /* this is sorted */
[7] F=os_md.llord(L1); /* get inclusion relation */
[8] F1=os_md.invvlmap(F[2]); /* inverse of the above */
```

Here [5]~[7] may be

```
[5] L=os_md.m21(RR|flat=1);
[6] L1=os_md.lpair(L,0)[1]; /* hyperplane arrangement */
[7] F=os_md.llord(L1|sort=0); /* get inclusion relation */
```

and the term  $[[x,y,z-1],[x,y,z-1,x-y]]$  in [3] means the intersection defined by  $x = y = z - 1 = 0$ , namely the point  $(0,0,1)$  is the intersection of 4 hyperplanes defined by  $a = 0$ ,  $y = 0$ ,  $z - 1 = 0$  and  $x - y = 0$ , respectively.

## 82. `exarHplane(p,t)`

:: example hyperplane arrangement  $p = [x_1, \dots, x_n]$  : variables

```
t = "A": { $x_i - x_j \mid 1 \leq i < j \leq n$ }
t = "B": { $x_i \pm x_j, x_k \mid 1 \leq i < j \leq n, 1 \leq k \leq n$ }
t = "D": { $x_i \pm x_j \mid 1 \leq i < j \leq n$ }
t = "1": { $\sum_{i \in I} x_i \mid \emptyset \neq I \subset \{1, \dots, n\}$ }
```

```
[0] os_md.exarHplane([x,y,z,w],"A");
[x-y,x-z,x-w,y-z,y-w,z-w]
[1] os_md.exarHplane([x,y,z],"B");
[x,x-y,x+y,x-z,x+z,y,y-z,y+z,z]
[2] os_md.exarHplane([x,y,z],"D");
[x-y,x+y,x-z,x+z,y-z,y+z]
[3] os_md.exarHplane([x,y,z],"1");
[x,y,x+y,z,x+z,y+z,x+y+z]
```

### 83. linfrac01( $\ell$ |over=1)

:: List of linear fractional transformations of  $x = 0, 1, \infty, y, z, \dots$  ( $\ell = [x, y, 0]$  etc. 0 is infinite point)

$\ell = [x, y]$  or  $\ell = [x, y_1, \dots, y_q]$  and put  $\mathbf{x} = (x_0, x_1, \dots, x_{q+3}) = (x, 0, 1, y_1, \dots, y_q, \infty)$   
 $(x_0 = x, x_1 = 0, x_2 = 1, x_3 = y_1, \dots, x_{q+2} = y_q, x_{q+3} = \infty)$

- A linear fractional transformation corresponds to a permutation of  $\{0, 1, \dots, q + 3\}$ . If  $q > 1$  there are  $(q + 4)!$  permutations. But if  $q = 1$ , a linear transformation corresponds to a permutation of  $\{1, 2, 3\}$ . cf. [lft01\(\)](#).  
 This function returns the list of all linear fractional transformations.
- $\ell = [[x, y]]$  or  $\ell = [[x, y_1, \dots, y_q]]$ : returns the list of pairs of linear transformations with the corresponding permutations.

```
[0] os_md.linfrac01([x]);
[[x], [-x+1], [(1)/(x)], [(x-1)/(x)], [(-1)/(x-1)], [(x)/(x-1)]]
[1] os_md.linfrac01([[x]]);
[[[x], [0,1,2,3]], [[-x+1], [0,2,1,3]], [[[1)/(x)], [0,3,2,1]], [[[x-1)/(x)], [0,2,3,1]],
 [[(-1)/(x-1)], [0,3,1,2]], [[[x)/(x-1)], [0,1,3,2]]]
[2] os_md.linfrac([x,y]);
[[x,y], [y,x], [-x+1,-y+1], [(1)/(x), (1)/(y)], [(1)/(x), (y)/(x)], [(y)/(x), (1)/(x)],
 ...
 [(y*x-y)/((y-1)*x), (x-1)/(y-1)], [(y-1)*x]/(y*x-y), (y-1)/(x-1)]]
```

### 84. lft01( $\ell, t | \text{tr}=\tau$ )

:: Linear fractional transformations of  $\ell = [x, y]$  or  $\ell = [x, y_1, y_2, \dots, y_q]$

Let  $(0, 1, y_1, y_2, \dots, y_q, \infty)$  be singular points with respect to  $x$ -variable and put  $\mathbf{x} = (x_0, x_1, \dots, x_{q+3}) = (x, 0, 1, y_1, \dots, y_q, \infty)$   
 $(x_0 = x, x_1 = 0, x_2 = 1, x_3 = y_1, \dots, x_{q+2} = y_q, x_{q+3} = \infty)$ .

- We consider the KZ equation

$$\frac{\partial u}{\partial x_i} = \sum_{j \in \{0, \dots, q+2\} \setminus \{i\}} \frac{A_{i,j}}{x_i - x_j} u \quad (0 \leq i \leq q+2),$$

$$A_{i,j} = A_{j,i}, \quad \sum_{j \in \{0, \dots, q+3\} \setminus \{i\}} A_{i,j} = 0 \quad (0 \leq i \leq q+3)$$

and its restriction to  $x_1 = 0$  and  $x_2 = 1$  with variables  $(x, y_1, \dots, y_q)$ .

- A linear fractional transformation corresponds to a permutation of  $\{0, 1, \dots, q + 3\}$ .
- If  $t$  is a permutation  $\sigma$ , then the corresponding linear fractional transformation is returned.
- If  $\sigma = [\sigma_0, \dots, \sigma_{q+3}]$ , the singular hyperplane  $x_i = x_j$  changes into  $x_{\sigma_i} = x_{\sigma_j}$ . namely,

$$\frac{\partial u}{\partial x_i} = \sum_{j \in \{0, \dots, q+2\} \setminus \{i\}} \frac{A_{i,j}}{x_i - x_j} u \quad (0 \leq i \leq q+2)$$

$$\rightarrow \frac{\partial u}{\partial x_i} = \sum_{j \in \{0, \dots, q+2\} \setminus \{i\}} \frac{A_{i,j}}{x_{\sigma(i)} - x_{\sigma(j)}} u = \sum_{j \in \{0, \dots, q+2\} \setminus \{i\}} \frac{A_{\sigma^{-1}(i), \sigma^{-1}(j)}}{x_i - x_j} u$$

$\sigma$  can be a transposition  $[i, j]$  or an identity 1. We may indicate a pair in the elements  $\ell$  or the strings "0", "1", "infty".


- If  $\ell = [[x, y], 1]$ , then the corresponding permutation is also returned. Here 1 can be a permutation. Namely,

`os_md.lft01([[x,y],1],σ ∘ σ') = os_md.lft01(os_md.lft01([[x,y],1],σ),σ')`

- If  $t$  is an integer, it corresponds to the following permutation

| $t$  | $0 < j < q$                   | transposition | $t_\infty$ | $t_0$    | $t_1$    | $t_x$    | $t_y$ | $\frac{(t_x - t_0)(t_1 - t_\infty)}{(t_x - t_\infty)(t_1 - t_0)}$ | $\frac{(t_y - t_0)(t_1 - t_\infty)}{(t_y - t_\infty)(t_1 - t_0)}$ |
|------|-------------------------------|---------------|------------|----------|----------|----------|-------|-------------------------------------------------------------------|-------------------------------------------------------------------|
|      |                               |               | $\infty$   | 0        | 1        | $x$      | $y$   | $x$                                                               | $y$                                                               |
| $-j$ | $y_j \leftrightarrow y_{j+1}$ | $(j+2, j+3)$  | $\infty$   | 0        | 1        | $x$      |       | $x$                                                               |                                                                   |
| 0    | $x \leftrightarrow y_1$       | $(0,3)$       | $\infty$   | 0        | 1        | $y$      | $x$   | $y$                                                               | $x$                                                               |
| 1    | $0 \leftrightarrow 1$         | $(1,2)$       | $\infty$   | 1        | 0        | $x$      | $y$   | $1-x$                                                             | $1-y$                                                             |
| 2    | $\infty \leftrightarrow 0$    | $(1, q+3)$    | 0          | $\infty$ | 1        | $x$      | $y$   | $\frac{1}{x}$                                                     | $\frac{1}{y}$                                                     |
| 3    | $1 \leftrightarrow x$         | $(0,2)$       | $\infty$   | $x$      | 0        | 1        | $y$   | $\frac{1}{x}$                                                     | $\frac{y}{x}$                                                     |
| 4    | $0 \leftrightarrow x$         | $(0,1)$       | $\infty$   | 0        | $x$      | 1        | $y$   | $\frac{x}{x-1}$                                                   | $\frac{x-y}{x-1}$                                                 |
| 5    | $1 \leftrightarrow y$         | $(2,3)$       | $\infty$   | 0        | $x$      | $y$      | 1     | $\frac{x}{y}$                                                     | $\frac{1}{y}$                                                     |
| 6    | $\infty \leftrightarrow y_q$  | $(q+2, q+3)$  | $y_q$      | 0        | $x$      | 1        |       | $\frac{x(1-y_q)}{x-y_q}$                                          | $1-y_{(q=1)}$                                                     |
| 7    | $1 \leftrightarrow \infty$    | $(2, q+3)$    | 1          | 0        | $\infty$ | $x$      | $y$   | $\frac{x}{x-1}$                                                   | $\frac{y}{y-1}$                                                   |
| 8    | $x \leftrightarrow \infty$    | $(0, q+3)$    | $x$        | 0        | 1        | $\infty$ | $y$   | $1-x$                                                             | $\frac{y(x-1)}{x-y}$                                              |

|          |                                                                                    |                                                         |
|----------|------------------------------------------------------------------------------------|---------------------------------------------------------|
| $t = 0$  | $(y_1, x, y_2, y_3, \dots)$                                                        | $x_0 = x \leftrightarrow x_3 = y_1$                     |
| $t = -j$ | $(x, y_1, \dots, y_{j-1}, y_{j+1}, y_j, y_{j+2}, \dots)$                           | $y_j \leftrightarrow y_{j+1} \quad (1 \leq j \leq q-1)$ |
| $t = 1$  | $(1-x, 1-y_1, 1-y_2, 1-y_3, \dots)$                                                | $x_1 = t_0 \leftrightarrow x_2 = t_1$                   |
| $t = 2$  | $(1/x, 1/y_1, 1/y_2, 1/y_3, \dots)$                                                | $x_1 = t_0 \leftrightarrow x_{q+3} = t_\infty$          |
| $t = 3$  | $(1/x, y_1/x, y_2/x, y_3/x, \dots)$                                                | $x_0 = x \leftrightarrow x_2 = t_1$                     |
| $t = 4$  | $(\frac{x}{x-1}, \frac{x-y_1}{x-1}, \frac{x-y_2}{x-1}, \frac{x-y_3}{x-1}, \dots)$  | $x_0 = x \leftrightarrow x_1 = t_0$                     |
| $t = 7$  | $(\frac{x}{x-1}, \frac{y_1}{y_1-1}, \frac{y_2}{y_2-1}, \frac{y_3}{y_3-1}, \dots)$  | $x_2 = t_1 \leftrightarrow x_{q+3} = t_\infty$          |
| $t = 8$  | $(1-x, \frac{y(x-1)}{x-y}, \frac{y_2(x-1)}{x-y_2}, \frac{y_3(x-1)}{x-y_3}, \dots)$ | $x_0 = x \leftrightarrow x_{q+3} = t_\infty$            |

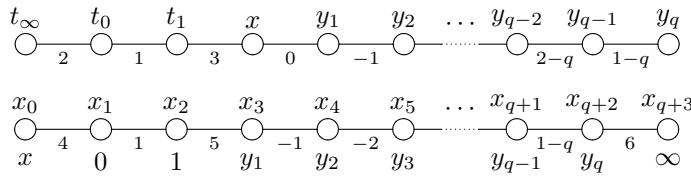

```
[0] for(I=-1;I<9;I++) os_md.mycat([I,os_md.lft01([x,y,z],I|tr=1)]);
-1 [[x,z,y], [0,1,2,4,3,5]]
0 [[y,x,z], [3,1,2,0,4,5]]
1 [[-x+1,-y+1,-z+1], [0,2,1,3,4,5]]
2 [[(1)/(x),(1)/(y),(1)/(z)], [0,5,2,3,4,1]]
3 [[(1)/(x),(y)/(x),(z)/(x)], [2,1,0,3,4,5]]
4 [[(x)/(x-1),(x-y)/(x-1),(x-z)/(x-1)], [1,0,2,3,4,5]]
5 [[(x)/(y),(1)/(y),(z)/(y)], [0,1,3,2,4,5]]
6 [[[(-z+1)*x)/(x-z),((-z+1)*y)/(y-z),-z+1], [0,1,2,3,5,4]]
7 [[(x)/(x-1),(y)/(y-1),(z)/(z-1)], [0,1,5,3,4,2]]
8 [[-x+1,(y*x-y)/(x-y),(z*x-z)/(x-z)], [5,1,2,3,4,0]]
[1] os_md.lft01([[x,y],1],1);
[[-x+1,-y+1],[0,2,1,3,4]]
[2] os_md.lft01(@@,2);
[[(-1)/(x-1),(-1)/(y-1)],[0,4,1,3,2]] /* (0,1,infty) -> (\infty,0,infty) */
```

```

[3] os_md.lft01([x,y],@@[1]);
[(-1)/(x-1),(-1)/(y-1)]
[4] os_md.lft01([x,y],[2,4,0,3,1]);
[x,(x)/(y)]
[5] os_md.lft01([x,y],[1,0,4,3,2]);
[x,(-x+y)/(y-1)]
[6] os_md.lft01([x,y],[4,2,1,3,0]);
[x,((-y+1)*x)/(x-y)]
[7] os_md.lft01([x,y,z],[x,"0"]);
[(x)/(x-1),(x-y)/(x-1),(x-z)/(x-1)]

```

### 3.1.3 Some operators

85. `okubo3e([p0,1, ..., p0,m], [p1,1, ..., p1,n], [p2,1, ..., p2,m+n] | opt=1)`  
 86. `fuchs3e([p0,1, ..., p0,n], [p1,1, ..., p1,n], [p2,1, ..., p2,n])`  
 87. `ghg([p1,1, p1,2, ..., p1,m], [p2,1, p2,2, ..., p2,n])`  
 :: differential operator satisfied by generalized hypergeometric function  ${}_mF_n(p_1; p_2; x)$   
 (cf. `seriesHG()`)

$$P(x, \frac{d}{dx}) = \prod_{j=1}^n (x \frac{d}{dx} + p_{2,j}) \cdot \frac{d}{dx} - \prod_{j=1}^m (x \frac{d}{dx} + p_{1,j})$$

$${}_mF_n(p_{1,1}, \dots, p_{1,n}; p_{2,1}, \dots, p_{2,n}; x) = \sum_{n=0}^{\infty} \frac{\prod_{\nu=1}^m (p_{1,\nu})_n}{\prod_{\nu=1}^n (p_{2,\nu})_n} \frac{x^n}{n!}$$

`x` is the variable and `dx` is differential

If  $m = n + 1$ , the operator is rigid and Fuchsian and

$$\wp \left\{ \begin{array}{cccccc} 0 & 0 & 1-p_{2,1} & \cdots & 1-p_{2,m-2} & 1-p_{2,m-1} \\ 1 & 0 & 1 & \cdots & m-2 & -\gamma \\ \infty & p_{1,1} & p_{1,2} & \cdots & \cdots & p_{1,m} \end{array} ; x \right\}$$

Fuchs relation :  $\gamma = \sum p_{1,\nu} - \sum p_{2,\nu}$

When  $m = 2$  and  $n = 1$ , the operator corresponds to Gauss hypergeometric equation

- [0] `os_md.ghg([a,b],[c]);`  
`(-x^2+x)*dx^2+((-a-b-1)*x+c)*dx-b*a`  
 88. `ghg2([a1, a2, ..., b], [a'1, a'2, ..., b'] | raw=1, all=1, symbol=1, var=v)`  
 :: generalized hypergeometric equation of many variables  
 $a_i$  are lists  $[a_{i,1}, a_{i,2}, \dots]$ .  
 If  $a_i$  is a scalar.  $a_i$  is replaced by  $[a_i]$ .

$$u(x_1, x_2, \dots) = \sum_{m_1 \geq 0, m_2 \geq 0, \dots} \frac{\prod_i \prod_j (a_{i,j})_{m_i} \prod_k (b_k)_{m_1+\dots}}{\prod_i \prod_j (a'_{i,j})_{m_i} \prod_k (b'_k)_{m_1+\dots}} x_1^{m_1} x_2^{m_2} \dots$$

Get the equation satisfied by this series modulo constant.

Default :  $(x_1, x_2, x_3, x_4) = (x, y, z, w)$  if the number of variables  $\leq 4$ .

- `all=1` : get full equation
- `raw=1` : get reduced equation if  $(a'_1)_1 (a'_2)_1 \dots = 0$
- `symbol=1` : get the generator of the symbol ideal

The equations satisfied by  $F_1(a; b, b'; c; x, y)$ ,  $F_2(a; b, b'; c, c'; x, y)$ ,  $F_3(a, a'; b, b'; c; x, y)$ ,  $F_4(a; b; c, c'; x, y)$  are given by

```

os_md.ghg2([b,b',a],[0,0,c]),
os_md.ghg2([b,b',c],[[0,c],[0,c'],[]]),
os_md.ghg2([[a,b],[a',b'],[]].[0,0,c]),
os_md.ghg2([],[],[a,b],[[0,c],[0,c'],[]]).

[0] P=os_md.ghg2([b,c,a],[0,0,d]);
[((-y*x+y)*dx-b*y)*dy+(-x^2+x)*dx^2+((-a-b-1)*x-d+1)*dx-b*a,
 (-y^2+y)*dy^2+((-y+1)*x*dx+(-a-c-1)*y-d+1)*dy-c*x*dx-c*a]
[1] map(os_md.psymbol,P,[[x,dx],[y,dy]]);
[(-y*x+y)*dx*dy+(-x^2+x)*dx^2,(-y^2+y)*dy^2+(-y+1)*x*dx*dy]

89. even4e([p1,1,p1,2,p1,3,p1,4],[p2,1,p2,2])
:: Even family of order 4 (Rigid)

$$\wp \left\{ \begin{array}{cccccc} 0 & 0 & 1 & p_{2,1} & p_{2,2} \\ 1 & 0 & 1 & p_0 & p_0 + 1 \\ \infty & p_{1,1} & p_{1,2} & p_{1,3} & p_{1,4} \end{array}; x \right\}$$

Fuchs relation : $2p_0 + p_{1,1} + p_{1,2} + p_{1,3} + p_{1,4} + p_{2,1} + p_{1,2} = 3$
90. odd5e([p1,1,p1,2,p1,3,p1,4,p1,5],[p2,1,p2,2])
:: Odd family of order 5 (Rigid)

$$\wp \left\{ \begin{array}{cccccc} 0 & 0 & 1 & p_{2,1} & p_{2,2} & p_{2,2} + 1 \\ 1 & 0 & 1 & 2 & p_0 & p_0 + 1 \\ \infty & p_{1,1} & p_{1,2} & p_{1,3} & p_{1,4} & p_{1,5} \end{array}; x \right\}$$

Fuchs relation $2p_0 + p_{2,1} + 2p_{2,2} + \sum p_{1,j} = 4$
91. rigid211([p0,1,p0,2],[p1,1,p1,2],[q0,q1])
:: Type 211,211,211

$$\wp \left\{ \begin{array}{cccccc} 0 & 0 & 1 & p_{0,1} & p_{0,2} \\ 1 & 0 & 1 & p_{1,1} & p_{1,2} \\ \infty & q_0 & q_0 + 1 & q_1 & q_2 \end{array}; x \right\}$$

Fuchs relation : $p_{0,1} + p_{0,2} + p_{1,1} + p_{1,2} + 2q_0 + q_1 + q_2 = 4$
92. extra6e([p1,1,p1,2,p1,3,p1,4,p1,5,p1,6],[p2,1,p2,2])
:: Extra case (Rigid)

$$\wp \left\{ \begin{array}{ccccccccc} 0 & 0 & 1 & p_{2,1} & p_{2,1} + 1 & p_{2,2} & p_{2,2} + 1 \\ 1 & 0 & 1 & 2 & 3 & p_0 & p_0 + 1 \\ \infty & p_{1,1} & p_{1,2} & p_{1,3} & p_{1,4} & p_{1,5} & p_{2,6} \end{array}; x \right\}$$

Fuchs relation : $2p_0 + 2p_{2,1} + 2p_{2,2} + \sum p_{1,j} = 5$
93. eofamily([p0,1,p0,2],[p1,1],[p2,1],...,p2,n])
:: Even/odd family (obsolete)
94. ev4s(p1,p2,p3,p4,p5)
:: Rigid restriction of Heckman-Opdam's hypergeometric equation of type (BC_2, BC_1)
[0] P=os_md.ev4s(a,b,c,d,e);
(x^4-2*x^3+x^2)*dx^4+((-2*a+2*b+8)*x^3+(4*a-2*b-13)*x^2+(-2*
...
[1] os_md.expat(P,x,0);
[a-c+1/2,a+c-1/2,1,0]
[2] os_md.expat(P,x,1);
[-b+1/2,-b+3/2,1,0]
[3] os_md.chkexp(P,x,1,-b+1/2,2);
[]


```

```

[4] os_md.expat(P,x,"infty");
[-1/2*a+1/2*b-1/2*d+1/2,-1/2*a+1/2*b+1/2*d+1/2,-1/2*a+1/2*b-1/2*e+1/2,
-1/2*a+1/2*b+1/2*e+1/2]

95. b2e(p1,p2,p3,p4,p5)
:: Non-rigid restriction of Heckman-Opdam's hypergeometric equation of type (BC_2, A_1)
[0] P = os_md.b2e(a,b,c,d,e);
(x^4-2*x^3+x^2)*dx^4+((-4*c+10)*x^3+(6*c-15)*x^2+(-2*c+5)*x
...
[1] os_md.expat(P,x,0);
[-a+c+1/2,a+c-1/2,1,0]
[2] os_md.expat(P,x,1);
[-b+c+1/2,b+c-1/2,1,0]
[3] os_md.expat(P,x,"infty");
[-c-1/2*d-1/2*e+1,-c-1/2*d+1/2*e+1,-c+1/2*d-1/2*e+1,-c+1/2*d+1/2*e+1]

96. heun([a,b,c,d,e],p,r)
:: Heun's equation. r is an accessory parameter

$$\wp \left\{ \begin{array}{lll} 0: & 0 & c \\ 1: & 0 & d \\ p: & 0 & e \\ \infty: & a & b \end{array}; x \right\}$$
 Fuchs relation : $a + b + 1 = c + d + e$
[0] os_md.heun([a,b,c,d,"?"],p,r);
(x^3+(-p-1)*x^2+p*x)*dx^2+((a+b+1)*x^2+((-c-d)*p-a-b+d-1)*x+c*p)*dx+b*a*x-b*a*r

```

## 3.2 Useful functions

The following functions are in a module and we call the functions by putting `os_md.` at the head such as `os_md.myhelp()`.

### 3.2.1 Extended function

```

97. myhelp(h)
:: Displays the manual of os_muldif.rr
• os_muldif.pdf, os_muldif.dvi should be in get_rootdir()\help. They are displayed by $h = 1$ or -1 , respectively.
• Suppose DVIOUTH is correctly set. Then the explanation of the function is shown by indicating its name h by myhelp(h) (if it is contained in os_muldif.dvi). Here h is a string such as myhelp("m2mc") removed the top os_md..
• When $h = 0$, os_md.getbygrs, os_md.m2mc or os_md.mgen, the corresponding explanation is displayed.
• $h = [dviout, n]$: Sets the environment to this display. dviout is the pathname of dviout and n is the number of dviout. Here $n = 2$ is recommended since the first dviout is used to display equations by os_muldif.rr.
• DVIOUTH may be used under other environment or more general settings.

98. chkfun(f,s)
:: Checks whether f (= a string) is defined and load(s) if it is not
• $f = 0$: Returns version of Risa/Asir

```

- $f = 1$  : Returns version of `os_muldif.rr`
- $s = 0$  : Checks whether the function with the name  $f$  is defined when  $f$  is a string.
- $f$  can not be a function in a module

```
[0] os_md.chkfun(0,0)$
Risa/Asir Ver. 20121217
[1] os_md.chkfun(1,0)$
Loaded os_muldif Ver. 00140401 (Toshio Oshima)
```

### 99. `isMs()`

:: Checks whether the operating system is Microsoft Windows

Checks the environment variable `temp` or `tmp` and returns 1 if the 3rd character of the value is ¥ or \ and 0 otherwise.

### 100. `isyes( $p$ | $set=\ell$ )`

:: Defines a function returning 0 or 1

- `set=1` : Defines a function.  $p$  is a list whose elements are a function and the list of parameters of the functions and the range of the value returned by the function which means as follows.

Namely, when  $p = [fn, [t_1, t_2, \dots], [a, b]]$ . `isyes(X|set=p)` means the function

```
def foo(X){
 R=fn(X,t_1,t_2,...);
 return (R>=a && R<=b)?1:0;
}
```

- Suppose  $p = [\text{type}, [], [0, 1]]$ . Then the function is defined which returns 1 (yes) or 0 (no) if  $\text{type}(p) \in [0, 1]$  and 0 otherwise. Here  $-\infty$  or  $\infty$  is indicated by "".
- If the range is a value, then the value can be indicated. Namely, `[\text{type}, [], 1]` is equivalent to `[\text{type}, [], [1, 1]]`.
- If several conditions are indicated by a list of lists reoresenting a condition, then the function defined returns 1 only if all the conditions are "yes".
- $p=[[os\_md.isint, [], 1], [os\_md.calc, [[>, 0]], 1]]$  means that the function defined returns 1 only if the given parameter is a positive integer.
- The function defined is valid until a new function is defined by `set=1`.

- `set=0` : Returns the function defined (see the following example [11]).
- `set=` : If the list for judge is indicated by `set=` and  $p$  is an object to be judged, then the value 1 or 0 is returned with keeping the already defined function.
- If `set=` is not indicated,  $p$  is judged and 1 or 0 is returned according to the judge.

```
[0] os_md.isyes([[os_md.isint, [], 1], [os_md.calc, [[>, 0]], 1]]|set=1)$
[1] os_md.isyes(0|set=0);
[[os_md.isint, [], 1], [os_md.calc, [[>, 0]], 1]]
[2] os_md.isyes(3/2);
0
[3] os_md.isyes(@i);
0
[4] os_md.isyes(-1);
0
[5] os_md.isyes(3/2);
0
[6] os_md.isyes(3);
1
```

```

[7] A=mat([1,2],[3,4]);
[1 2]
[3 4]
[8] os_md.isall(os_md.isyes,A);
1
[9] A[1][1]=0$
[10] os_md.isall(os_md.isyes,A);
0
[11] def isPositiveInt(X){
 P=os_md.isyes(0|set=0);
 os_md.isyes([[os_md.isint,[],1],[os_md.calc,[[">",0]],1]]|set=1);
 V=os_md.isyes(X);
 os_md.isyes(P|set=1);
 return V;
}$
[12] isPositiveInt(3/2);
0

```

The above [11] is same as the following function

```

def isPositiveInt(X){
 return os_md.isyes(X|set=[[os_md.isint,[],1],[os_md.calc,[[">",0]],1]]);
}$

```

#### 101. `isall(f,m)`

:: Returns 0 if  $m$  contains an element satisfying  $f(p) = 0$  and 1 otherwise  
If  $m$  is not a list, a vector nor a matrix,  $m$  is replaced by  $[m]$ .  
See an example of [isyes\(\)](#).

```

[0] os_md.isall(os_md.isint,[0,2,3,1/2]);
0
[1] os_md.isall(os_md.isint,[0,2,3,4]);
1
[3] os_md.isall(os_md.isint,[0,2,3,[1]]);
0
[4] os_md.isall(os_md.isint,mat([0,2,3,4]));
1

```

#### 102. `ptype(p,l)`

:: Returns [type\(\)](#) regarding  $\ell$  as the variable or  $\ell$  as the list of variables

- `ptype(p,vars(p))` corresponds to `type(p)`.
- If  $p$  is a rational function and its denominator (resp. numerator) contains an elementary function which is not a polynomial, then 128 (resp. 64) is added to the number returned.

```

[0] P=(x+y)^2/a;
(x^2+2*y*x+y^2)/(a)
[1] os_md.ptype(P,x);
2

```

```

[2] os_md.ptype(P,a);
3
[3] os_md.ptype(P,z);
1
[4] os_md.ptype(P,[x,y]);
2
[5] os_md.ptype(P,[x,y,a]);
3
[6] os_md.ptype([1,2],[x,y]);
4
[7] os_md.ptype(sin(x)+sin(y)+@pi,x);
65
[8] os_md.ptype(sin(x)+x,x);
66
[8] os_md.ptype(sin(x)/x,x);
67
[9] os_md.ptype(1/sin(x),x);
129
[10] os_md.ptype(sin(x)/(x+cos(x)),x);
195

```

103. `getline(Id|Max=m,CR=[r1,r2,...],LF=[l1,l2,...])`

:: An extension of `get_line()`

Gets a line form a text file (deleted the last line feed).

- $m$  : maximal length in bytes for a line (2047 by default).
- $r_1, r_2, \dots$  : codes to be ignored ([13] by default),
- $l_1, l_2, \dots$  : codes indicating the end of a line ([10] by default).

104. `keyin(s)`

:: Shows  $s$  and waits a line input from keyboard and returns it

Returns a line input deleting the last linefeed

`mycat0()` is used to show  $s$  and therefore numbers or a list is allowed.

```

[0] S=os_md.keyin("Input? ")$
Input? This is a pen.
[1] S;
This is a pen.

```

105. `showbyshell(s)`

:: Executes  $s$  by shell and show the standard output in Risa/Asir

```

[0] os_md.showbyshell("echo %temp%")$
[1] os_md.showbyshell("dir c:\\")$

```

106. `getbyshell(s)`

:: Executes  $s$  by shell and puts the standard output to a file

- If  $\text{Id}$  is returned,  $\text{Id} \geq 0$  means that the output is obtained and it can be read `get_line(Id)` by lines. If we use `get_byte(Id)`, we get by bites.
- We get 0 by `getline(Id)` after the last line. We need `getbyshell(Id)` or `close_file(Id)` before we call this function again.

- A temporary file is made in the directory indicated by the environment variable `%temp%` or `%tmp%` or the value `DIROUT`. A new file is created after erasing the former file.

107. `fcat(f,s|exe=1)`  
 :: Outputs  $s$  in a file  $f$   
 • Outputs `print(s)` in the file  $f$ . If  $f$  exists, the output is appended in the file by default.  
 The command `remove_file(f)` means to delete the file  $f$ .  
 In the followings, the file is in the directory indicated by `DIROUT`.  
 •  $f = 0$  : Appends `print(s)` in the file `fcat.txt`.  
 •  $f = 1$  : Outputs `print(s)` to the file `fcat.txt`.  
 •  $f = 2, \dots, 9$  : Outputs to the file `fcatf.txt`.  
 •  $f = -1$  : Returns the default filename.  
 • `exe=1` : Outputs `print(s)` and executes the related program (usually an editor).

108. `makev([l1, l2, ...] | num=1)`  
 :: Makes a variable combining  $\ell_1, \ell_2 \dots$   
 •  $\ell_i$  may be a variable, a string or a non-negative integer  
 • The integers 10, 11, ... are understood as a letter  $a, b, \dots$  if `num=1` is not indicated.

```
[0] os_md.makev(["a_", 0, 1]);
a_01
[1] os_md.makev([a, 0, 1]);
a01
[2] os_md.makev([a, 0, b]);
a0b
[3] os_md.makev([a, 10, b]);
aab
[4] os_md.makev([a,10,"_",3] | num=1);
a10_3
[5] os_md.my_tex_form(@@);
a_{10,3}
```

109. `shortv(p, [v1, v2, ...] | top=w)`  
 :: Changes the variables  $v_1, \dots$  with indices contained in  $p$  into variables with one letter  
 When the name  $v_i$  is a letter followed by numbers starting from 0 or 1, then  $v_i$  are changed to  
 variables starting from  $w$  (a by default) up to  $z$  excluded the variables already used.

```
[0] P=[a1,a2,b,c0,c1]$
[1] os_md.shortv(P,[a,c]);
[a,c,b,d,e]
[2] os_md.shortv(P,[c,a]);
[d,e,b,a,c]
[3] os_md.shortv(P,[a,c] | top=x);
[x,y,b,z,c1]
```

110. `makenewv( $\ell$  | var=v, num=n)`  
 :: Generates a new variable which is not used in  $\ell$   
 • Returns a variable from  $z_0, z_1, \dots, z_9, z_{10}, \dots$  which is not contained in  $\ell$ .  
 • The variable  $z_-$  to be returned is changed by `var=v`. Here  $v$  is a variable or a string.  
 • The variables contained in functions in  $\ell$  are checked.  
 • `num=n` : New  $n$  variables are returned.

```

[0] os_md.makenewv(0);
z_0
[1] os_md.makenewv([z_0+z_1,z_2]);
z_3
[2] os_md.makenewv([z_0+z_1,z_2]|var=x);
x0
[3] os_md.makenewv([z_0,z_1]|num=3);
[z_2,z_3,z_4]
[4] os_md.makenewv(z_2*sin(cos(z_0+z_1))+z_3);
z_4

```

111. **isvar**(*p*)

:: Is *p* a variable?

Returns 1 or 0.

```

[0] os_md.isvar(dx);
1
[1] os_md.isvar(-dx);
0
[2] os_md.isvar(1);
0

```

112. **varargs**(*p|all=t*)

:: Returns elementary functions and variables in *p*

- *p* can be matrix or list.
- Returns the list of elementary functions and their variables in *p*.
- The variables contained in elementary functions appeared in variables of functions in *p* are considered.
- **all=1** : Returns all elementary functions and variables
- **all=2** : Returns all variables.

```

[0] os_md.varargs(x*sin(y)+z+cos(s-t));
[[sin,cos],[y,s,t]]
[1] os_md.varargs(x*sin(y)+z+cos(s-t)|all=1);
[[sin,cos],[x,z,y,s,t]]
[2] os_md.varargs(x*sin(y)+z+cos(s-t)|all=2);
[x,z,y,s,t]
[3] os_md.varargs(sin(cos(x)*sin(y)+@pi+z));
[[sin,cos],[x,y,z]]

```

113. **pfargs**(*p,x|level=t*)

:: Returns all functions and variables containing variable *x*

- *p* can be a matrix or a list.
- Returns the list of elementary functions and their variables in *p*.
- Elementary functions in an argument of elementary function are considered.
- **level=t** : *t* = 1 means that the argument of a function is ignored. *t* = 2 means only the variables in the argument of a function. *t* means the depth of the function.

```
[0] os_md.pfargs(log(log(log(x))),x);
```

```

[[log(log(log(x))),log,log(log(x))] , [log(x),log,x] , [log(log(x)),log,log(x)]]
[1] os_md.pfargs(sin(cos(x)*cos(y)+@pi+z),x);
[[sin(z+cos(y)*cos(x)+@pi),sin,z+cos(y)*cos(x)+@pi],[cos(x),cos,x]]
[2] os_md.pfargs(log(log(log(x))),x|level=1);
[[log(log(log(x))),log,log(log(x))]]
[3] os_md.pfargs(log(log(log(x))),x|level=2);
[[log(log(x)),log,log(x)]]
[4] os_md.pfargs(log(log(log(x))),x|level=3);
[[log(x),log,x]]

```

114. **isdif(*p*)**

:: Returns a list of the pairs of variable and its derivatives

*p* is considered a differential operator if

- *p* is a polynimial or a rational form
- *p* contains a variable whose first character is ‘d’ and 2nd character is a small alphabetical letter and *p* is a polynomial with respect to the variable.

```

[0] os_md.isdif((x+dx+dx1+dy+dz)^2/z);
[[x1,dx1],[x,dx],[y,dy],[z,dz]]
[1] os_md.isdif((x+dx+dx1+dy+dz)^2/dz);
0

```

115. **mysubst(*r*, [*v<sub>1</sub>*, *r<sub>1</sub>*] | inv=1) mysubst(*r*, [[*v<sub>1</sub>*, *r<sub>1</sub>*], ...] | inv=1)**

**mysubst(*r*, [*ℓ<sub>1</sub>*, *ℓ<sub>2</sub>*] | lpair=1, inv=1)**

:: Same as **subst(*r*, *v<sub>1</sub>*, *r<sub>1</sub>*, ...)**. Useful if *r* is complicated and *r* is a rational form

- *r* may be a rational form, a list, a vector or a matrix containing rational forms. It may contains a strings as an element, which is not changed.
- When *r<sub>j</sub>* are variables, **inv=1** can be indicated which means the inverse substitution (by the transposition of *v<sub>j</sub>* and *r<sub>j</sub>*).
- **inv=1** : inverse substitution
- If the number of elements of *ℓ<sub>1</sub>* is larger than 2, **lpair=1** is indicated.

116. **myswap(*p*, [*x<sub>1</sub>*, *x<sub>2</sub>*, ..., *x<sub>n</sub>*])**

:: Cyclic permutation (*x<sub>1</sub>*, *x<sub>2</sub>*, ..., *x<sub>n</sub>*) of a (list of) rational form(s)

*n* = 2 means the transposition of two variables.

```

[0] os_md.myswap([x,y,z,w],[x,y,z]);
[y,z,x,w]
[1] os_md.myswap([x,y,z,w],[x,z]);
[z,y,x,w]

```

117. **substnum(*l*, *s*, *t* | depth=d)**

:: Substitution of elements of a list or a vector

118. **mulsubst(*r*, [[*p<sub>1,0</sub>*, *p<sub>1,1</sub>*], [*p<sub>2,0</sub>*, *p<sub>2,1</sub>*], ...] | inv=1)**

**mulsubst(*r*, [*ℓ<sub>0</sub>*, *ℓ<sub>1</sub>*, ...] | lpair=1, generate=k, short=1)**

**mulsubst(*r*, [*ℓ<sub>0</sub>*, *ℓ<sub>1</sub>*] | conj=f) mulsubst(*r*, [*ℓ<sub>0</sub>*, *ℓ<sub>1</sub>*] | dfom=1)**

:: Simultaneous substitutions

- Returns the imultaneous substitution  $p_{j,0} \mapsto p_{j,1}$  ( $j = 1, 2, \dots$ ).
- $[[x,y],[y,x]]$  : transposition of *x* and *y*.
- **lpair=1** : the variables in *ℓ<sub>1</sub>* are simultaneously replaced by the elements of *ℓ<sub>2</sub>*, respectively. *ℓ<sub>2</sub>=[ℓ<sub>2,0</sub>, ℓ<sub>2,1</sub>]* means that the variables in *ℓ<sub>2,1</sub>* are replaced by elements in *ℓ<sub>2,0</sub>* respectively.

- `generate=k` : Return the pair os the lists of elements obtained by the compositions of substitutions and the procedures of the corresponding compositions (all or up to  $|k$  elements).  $|k| = 1$  means that  $|k| = 160$  is indicated.

The compositions is obtained by applying  $\ell_j$  to  $r$   $r \in \ell_j$ . If  $k > 0$ , then the numbers  $j$  are indicated. If  $k < 0$  and the element is obtained by applying  $\ell_j$  to the  $m$ -th element, then  $[j, m]$  is indicated.

- `conjugate=1` : Regarding  $[\ell_0, \ell_2]$  as a rational transformation and returns  $s \circ r \circ s^{-1}$ .
- `conjugate=-1` : Regarding  $[\ell_0, \ell_2]$  as a rational transformation returns  $s^{-1} \circ r \circ s$ .

```
[0] os_md.mulsubst(x+y^2+z^3, [[x,y],[y,x]]);
x^2+y+z^3
[1] os_md.mysubst(x+y^2+z^3, [[x,y],[y,x]]);
x^2+x+z^3
[2] os_md.mysubst(["top",x,y],[x,2]);
[top,2,y]
[3] subst(["top",x,y],[x,2]);
subst : invalid argument
return to toplevel
[4] os_md.mulsubst([x,y,z],[x,w]);
[w,y,z]
[5] os_md.mulsubst([x,y,z],[x,w]|inv=1);
[x,y,z]
[6] os_md.mulsubst([x,y,z], [[x,y,z],[y,x,z],[x,z,y]]|generate=1);
[[[x,y,z],[y,x,z],[x,z,y],[y,z,x],[z,x,y],[z,y,x]],[],[1],[2],[1,2],[2,1],
[1,2,1]]]
[7] os_md.mulsubst([x,y,z], [[x,y,z],[y,x,z],[x,z,y]]|generate=-1);
[[[x,y,z],[y,x,z],[x,z,y],[y,z,x],[z,x,y],[z,y,x]],[],[0],[1,0],[2,0],[1,2],
[2,1],[1,4]]]
[8] os_md.mulsubst([x,z,y], [[x,y,z],[y,z,x]]|conj=1);
[z,y,x]
[9] os_md.mulsubst([x,z,y], [[x,y,z],[y,z,x]]|conj=-1);
[y,x,z]
```

#### 119. `fmult(f,m,l,n|...)`

:: Returns  $m_{length(l)}$  by  $m_i \mapsto m_{i+1} = f(m_i, l[i], n[0], n[1], \dots | \dots)$  ( $m_0 = m$ )  
 •  $\ell$  and  $n$  are lists.  
 • Options are indicated to functions.

#### 120. `mtransbys(f,m,l|...)`

:: Extends a function  $f(x)$  of scalar  $x$  to a function of a list, vector or matrix  
 • The elements  $m_{nu}$  of  $m$  are transformed to  $f(m_\nu, l[0], l[1], \dots | \dots)$ .  
 • The list/vector/matrix mae be nested.  
 • The arguments are indicated by the list  $\ell$ .  
 • Option are put to the function.  
 • This function is similar to `map(f,m,l[0],...)` but `map()` cannot be nested and options are not indicated.

```
[0] A=newmat(2,2,[(x^2-y^2)/(x+y),x/y],
[yx/x^2,(x^2-y^2)/(x-y)]);
```

```

[(x^2-y^2)/(x+y) (x)/(y)]
[(y*x)/(x^2) (x^2-y^2)/(x-y)]
[1] os_md.mtransbys(red,A,[]);
[x-y (x)/(y)]
[(y)/(x) x+y]
[3] os_md.mtransbys(os_md.abs, [[1,-2], [3,-4]], []);
[[1,2], [3,4]]
[4] map(os_md.abs, [[1,-2], [3,-4]]);
[[1,-2], [3,-4]]

```

121. **mmulbys**(*f*, *m*, *n*, *ℓ* | ...)

:: Extends a pair of arguments of  $f$  to a a pair of matrices

- $\ell$  is a list of options.  $m$  is a argument of  $f$  or a matrices of the rarguments of  $f$ .
  - If  $m$  and  $n$  are matrices, the matrices
$$\left( \sum_{\nu} f(m_{i,\nu}, n_{\nu,j}, \ell[0], \ell[1], \dots) \right)_{i,j}$$
is returned.
  - If  $m$  or  $n$  is matrices, it is considered as a scalar matrix.
  - If  $m$  (redp.  $n$ ) is a vector, it is considered as a line (resp. column) vector.  
If  $m$  and  $n$  are vectors, a scalar is returned.
  - Options are valid,

122. `cmpsimple(p,q | comp=t)`

$\therefore$  Compares the simplicities of  $p$  and  $q$

If  $p$  is simpler than  $q$ , a negative integer is returned and if  $q$  is simpler than  $p$ , a positive number is returned.

Compare

- `iand(t,1)!=0` : numbers of variables
  - `iand(t,2)!=0` : numbers of monomials
  - `iand(t,4)!=0` : length of their expression
  - compares  $p$  and  $p$  in Risa/Asir

in this order. Here  $t \equiv 7$  by default.

```
[0] os_md.cmpsimple((x+y)^2,(x+1)^3|comp=1); /* # of variables */
1
[1] os_md.cmpsimple((x+y)^2,(x+1)^3|comp=2); /* # of monomials */
-1
[2] os_md.cmpsimple((x+y+z)^2,(sin(x)+cos(x))^2)|comp=4); /* length of expression */
-4
[3] os_md.cmpsimple(1,-1);
-1
[4] os_md.cmpsimple(4,2);
1
/* compare in Risa/Asir */
```

123. `simplify( $p, \ell, t$  | var=[ $x_1, x_2, \dots$ ])`

∴ Simplifies  $p$  by using linear relations indicated by  $\ell$

- $\ell = [\ell_0, \ell_1]$  : Applies  $\text{subst}(*, \ell_0, \ell_1)$  to (each element of)  $p$  and uses this substitution if the result is simpler ( $t = 1 \sim 7$ ).
  - $\ell = [\ell_1]$  ; If  $\ell_1$  is a polynomial and  $\ell_1$  contains a variable with just degree 1, we applies the above simplification by this linear relation.

- If there many linear relations,  $\ell$  is indicated the list of linear relations.
  - Compares the simplicity of the substitution checking  
 $\text{iand}(t,1) != 0$  : number of variables  
 $\text{iand}(t, 2) != 0$  : number of monomials ,  $\text{iand}(t, 4) != 0$  : length of expression  
 in this order and if the substitution is simpler, returns the substitution
  - If the substitution is same as original in the above check, check the order in |Risa/Asir—.
  - 複数の置き換えを試すときは,  $\ell = [[\ell_{00}, \ell_{01}], [\ell_{10}, \ell_{11}], \dots]$  とする.
  - **var**=[ $x_1, x_2, \dots$ ] : If  $p$  is a rational form of variables  $x_1, x_2, \dots$ , the numerator and denominator are simplified as polynomials.

```
[0] os_md.simplify([x+y+z+a+b,x+z+a+b],[a,-x-y-w/2-c],1);
[z-1/2*w+b-c,x+z+a+b]
[1] os_md.simplify([x+y+z+a+b,x+z+a+b],[a,-x-y-w/2-c],4);
[x+y+z+a+b,x+z+a+b]
[1] os_md.simplify(x+3*y+4*z,[x+y+z],1);
2*y+3*z
[2] os_md.simplify(x+3*y+4*z,[x+y+z],4);
-3*x-y
```

124. getel( $m, i$ )

:: Returns  $m[i]$  if  $m$  is a list/vector/matrix and  $i$  is non-negative integer  
 If  $i$  is a list  $[i_1, i_2]$  and  $m$  is a matrix, then  $m[i_1][i_2]$  is returned

Returns  $m$  in the remaining cases.

125. evalred( $r \mid \text{opt} = [[s_1, t_1], [s_2, t_2] \dots]]$ )

:: Replaces  $\sin(0)$ ,  $\cos(0)$ ,  $\exp(0)$  by 0, 1, 1 etc

- Replace the following expression by exact values  
 $\sin(k@pi)$ ,  $\cos(k@pi)$  etc. with the value in  $0, \pm 1, \pm \frac{1}{2}, \tan(0), \text{asin}(0), \text{atan}(0), \sinh(0), \cosh(0), \tanh(0), \exp(0), \log(1), \text{pow}(1,x), 1^x$
  - Adds the rule which means  $s_j$  are replaced by  $t_j$  ( $j = 1, 2, \dots$ ). We may indicate `opt=[s,t]` if there is only one rule to be added.

### 3.2.2 Numbers

### 3.2.3 Polynomials and rational functions

211. `fctrtos(r|var=ℓ, rev=1, dic=1, TeX=f, dviout=1, lim=n, small=1, pages=1, add=s)`

:: Transforms a rational function  $r$  to factorized strings

- **TeX=1** : Returns a source in L<sup>A</sup>T<sub>E</sub>X. If  $s$  is not a polynomial, the list of the numerator and denominator is returned.
  - **TeX=2, 3** : Returns a source in L<sup>A</sup>T<sub>E</sub>X. If  $s$  is not a polynomial, `\frac{ }{ }` is used but it is

too long for a line  $\text{\Bigl(} \dots \text{\Bigr)}$  is used with necessary new lines as follows.

- **var=x** : Returns as polynomials of  $x$  (for numerator/denominator) with the factorized coefficients. If  $\text{TeX}=2$  (resp.  $\text{TeX}=3$ ) is indicated,  $\backslash\backslash$  (resp.  $\backslash\backslash \&$ ) is used after the powers of  $x$  etc. considering the width of a line.
- **var=[x,s]** : Transforms the variable  $x$  to a string  $s$ .
- **var=[x,y,...]** : Regards  $r$  as a polynomial of  $(x,y,\dots)$ .
- **var=[[x,s],[y,t],...]** : As above and  $x,y,\dots$  are transformed by strings  $s,t,\dots$ , respectively.
- **rev=1** : Monomials are arranged from smaller degree.
- **dic=1** : Monomials are arranged from bigger degree in the lexicographic order.
- **dic=2** : Same as above but the product of variables is arranged in the reverse order.
- **var="dif0"** : The variable starting  $d$  followed by a lower case alphabet is regarded as a differential of the variable omitted the top  $d$ . The option  $\text{TeX}$  is indicated, the differential is expressed by  $\partial_{x_1}$  using  $\partial$ .
- **var="dif"** : Same as above. But if there is only one variable to be differentiated, the differential is simply expressed by  $\partial$ . If there are many such variables and all the names of variables to be differentiated are between  $x0 \geq x99$ , then the differentials are expressed as  $\partial_0, \dots, \partial_{99}$ .
- **var="dif1"** : Same as above but differentials are expressed as  $\frac{d^2}{dx^2}$  or  $\frac{\partial^3}{\partial x^2 \partial y}$ .
- **var="dif2"** : Same as above but the partial differential is used even if there is only one variable to be differentiated.
- **lim=n** : If  $r$  is a polynomial, the width of each line is arranged so that it does not exceed the width of  $n$  characters. The string  $\backslash\backslash$  or  $\backslash\backslash \&$  are used in cases  $\text{TeX}=2$  or  $\text{TeX}=1,3$ , respectively, but  $\&$  is not put at the top. If  $n$  is smaller than 30, it is considered to  $n=\text{TeXLim}$ . If  $n$  is 0, the width of a line is not considered.
- **small=1**: Uses the text style in L<sup>A</sup>T<sub>E</sub>X for fractions.  
The change of width by this indication is ignored.
- **dviout=1** : Displays  $r$  by dviout.  $\text{TeX}=3$  is automatically indicated.  
**show()** is useful for the display. The same option parameters are valid.
- **pages=1** :  $r$  is too long to put it in a page,  $\begin{aligned} \dots \end{aligned}$  is used and multiple pages are allowed. **pages=2** : Same as above but  $\allowdisplaybreaks$  are used. The number of lines in a page is indicated by **TeXPages**.
- **add=s** : Puts string  $s$  after each term.  $s$  may be a variable or a equation.

```
[0] S = os_md.fctrtos(1/(x-y)^2-1/(x+y)^2);
4*y*x/((x-y)^2*(x+y)^2);
[1] eval_str(S);
(4*y*x)/(x^4-2*y^2*x^2+y^4)
[2] os_md.fctrtos(1/(x-y)^2-1/(x+y)^2|TeX=1);
[4yx,(x-y)^2(x+y)^2]
[3] os_md.fctrtos(1/(x-y)^2-1/(x+y)^2|TeX=2);
\frac{4yx}{(x-y)^2(x+y)^2}
[4] os_md.fctrtos((x-a^4+1)^2|var=x);
x^2-2*(a-1)*(a+1)*(a^2+1)*x+(a-1)^2*(a+1)^2*(a^2+1)^2
[5] os_md.fctrtos((x-a^4+1)^2|var=x, TeX=1);
x^2-2*(a-1)*(a+1)*(a^2+1)*x+(a-1)^2*(a+1)^2*(a^2+1)^2
[6] os_md.fctrtos((x+y+1/a)^2|var=[x,y],TeX=1);
x^2+2xy+y^2+\frac{2}{a}x+\frac{1}{a^2}y+\frac{1}{a^2}
```

```

[7] os_md.fctrtos((x+y+a+b)^2|var=[x,y],TeX=1);
x^2+2xy+y^2+2(a+b)x+2(a+b)y+(a+b)^2
[8] os_md.fctrtos((x+y+a+b)^2|var=[x,y],TeX=1,dic=1);
x^2+2xy+2(a+b)x+y^2+2(a+b)y+(a+b)^2
[9] os_md.fctrtos((x+y+a+b)^2|var=[x,y],TeX=1,rev=1);
(a+b)^2+2(a+b)y+2(a+b)x+y^2+2xy+x^2
[10] os_md.fctrtos((a+b+dx)^2|var="dif",TeX=1);
\partial^2+2(a+b)\partial+(a+b)^2
[11] os_md.fctrtos((a+b+dx1)^2|var="dif",TeX=1);
\partial_{x_1}^2+2(a+b)\partial_{x_1}+(a+b)^2
[12] os_md.fctrtos((a+b+dx)^2|var="dif1",TeX=1);
\frac{d^2}{dx^2}+2(a+b)\frac{d}{dx}+(a+b)^2
[13] os_md.fctrtos((a+b+dx)^2|var="dif2",TeX=1);
\frac{\partial^2}{\partial x^2}\{\partial x^2\}+2(a+b)\frac{\partial}{\partial x}\{\partial x\}+(a+b)^2
[14] os_md.fctrtos((a+dx+dy)^2|var="dif1",TeX=1);
\partial_x^2+2\partial_x\partial_y+\partial_y^2+2a\partial_x+2a\partial_y+a^2
[15] os_md.fctrtos((dx+dy)^2|var="dif1",TeX=1);
\frac{\partial^2}{\partial x^2}\{\partial x^2\}+2\frac{\partial}{\partial x}\{\partial x\}\partial_y+\frac{\partial^2}{\partial y^2}\{\partial y^2\}
[16] os_md.fctrtos((x+2*y-z)^(20)+1|dviout=1)$
[17] os_md.fctrtos((x+2*y-z)^(20)+1|var=z,dviout=1)$
[18] os_md.fctrtos(os_md.seriesHG([a,b],[c],x,3)|var=x,rev=1,dviout=1)$
[19] os_md.fctrtos((1/(alpha+beta)+dx+d)^4+1|var="dif1",dviout=1)$

```

The result of [18] is the display

$$1 + \frac{ba}{c}x + \frac{b(b+1)a(a+1)}{2c(c+1)}x^2 + \frac{b(b+1)(b+2)a(a+1)(a+2)}{6c(c+1)(c+2)}x^3$$

The result of [18] is the following including the break of each line.

$$\begin{aligned} & \frac{d^4}{dx^4} + \frac{4((\alpha+\beta)d+1)}{\alpha+\beta} \frac{d^3}{dx^3} + \frac{6((\alpha+\beta)d+1)^2}{(\alpha+\beta)^2} \frac{d^2}{dx^2} + \frac{4((\alpha+\beta)d+1)^3}{(\alpha+\beta)^3} \frac{d}{dx} \\ & + \left( (\alpha^4 + 4\beta\alpha^3 + 6\beta^2\alpha^2 + 4\beta^3\alpha + \beta^4)d^4 + (4\alpha^3 + 12\beta\alpha^2 + 12\beta^2\alpha + 4\beta^3)d^3 + (6\alpha^2 + 12\beta\alpha + 6\beta^2)d^2 + (4\alpha \right. \\ & \left. + 4\beta)d + \alpha^4 + 4\beta\alpha^3 + 6\beta^2\alpha^2 + 4\beta^3\alpha + \beta^4 + 1 \right) / ((\alpha+\beta)^4) \end{aligned}$$

If `var=` is indicated and  $r$  is considered as a differential operator by

```

[20] os_md.fctrtos((1/(a+b)+dx1+dx2)^2|var="dif0",dviout=1)$
[21] os_md.fctrtos((1/(a+b)+dx1+dx2)^2|var="dif",dviout=1,small=1)$
[22] os_md.fctrtos((1/(b-a)+dx1+dx2)^2|var="dif2",dviout=1)$
[23] os_md.fctrtos((1/(a+b)+dx+d)^2|var="dif",dviout=1)$
[24] os_md.fctrtos((1/(a+b)+dx+d)^2|var="dif0",dviout=1)$
[25] os_md.fctrtos((1/(a+b)+dx+d)^2|var="dif1",dviout=1)$
[26] os_md.fctrtos((1/(a+b)+dx+d)^2|var="dif2",dviout=1,add="u")$
[27] os_md.fctrtos((1/(a+b)+dx+d)^2|var="dif1",dviout=1,small=1)$

```

The results are as follows, respectively.

$$\partial_{x_1}^2 + 2\partial_{x_1}\partial_{x_2} + \partial_{x_2}^2 + \frac{2}{a+b}\partial_{x_1} + \frac{2}{a+b}\partial_{x_2} + \frac{1}{(a+b)^2} \quad (20)$$

$$\partial_1^2 + 2\partial_1\partial_2 + \partial_2^2 + \frac{2}{a+b}\partial_1 + \frac{2}{a+b}\partial_2 + \frac{1}{(a+b)^2} \quad (21)$$

$$\frac{\partial^2}{\partial x_1^2} + 2\frac{\partial^2}{\partial x_1 \partial x_2} + \frac{\partial^2}{\partial x_2^2} - \frac{2}{a-b}\frac{\partial}{\partial x_1} - \frac{2}{a-b}\frac{\partial}{\partial x_2} + \frac{1}{(a-b)^2} \quad (22)$$

$$\partial_x^2 + \frac{2(da+db+1)}{a+b}\partial_x + \frac{(da+db+1)^2}{(a+b)^2} \quad (23)$$

$$\partial_x^2 + \frac{2(da+db+1)}{a+b}\partial_x + \frac{(da+db+1)^2}{(a+b)^2} \quad (24)$$

$$\frac{d^2}{dx^2} + \frac{2(da+db+1)}{a+b}\frac{d}{dx} + \frac{(da+db+1)^2}{(a+b)^2} \quad (25)$$

$$\frac{\partial^2 u}{\partial x^2} + \frac{2(da+db+1)}{a+b}\frac{\partial u}{\partial x} + \frac{(da+db+1)^2}{(a+b)^2}u \quad (26)$$

$$\frac{d^2}{dx^2} + \frac{2(da+db+1)}{a+b}\frac{d}{dx} + \frac{(da+db+1)^2}{(a+b)^2} \quad (27)$$

```
[28] os_md.fctrtos((a+b+x+y)^2|var=[x,y],TeX=2);
x^2+2xy+y^2+2(a+b)x+2(a+b)y+(a+b)^2 /* order by degree of (x,y) */
[29] os_md.fctrtos((a+b+x+y)^2|var=[x,y],dic=1,TeX=2);
x^2+2xy+2(a+b)x+y^2+2(a+b)y+(a+b)^2 /* order by degree of x */
[30] os_md.fctrtos((a+b+x+y)^2|var=[x,y],dic=2,TeX=2);
x^2+2yx+2(a+b)x+y^2+2(a+b)y+(a+b)^2 /* inverse order by degree of x */
[31] os_md.fctrtos((a+b+x+y)^2|var=[x],TeX=2);
x^2+2(y+a+b)x+(y+a+b)^2
```

### 3.2.4 Functions with real/complex variables

#### 3.2.5 Lists and vectors

##### 318. ldepth(*l*)

:: get the maximal depth of a list

```
[0] os_md.ldepth([1,1,[2,[3,[4],3]], [2,2]]);
4
[1] os_md.ldepth(x);
0
```

##### 319. refinement2(*m,l|opt=f*)

:: get all the refinements for two partitions of a positive integer

- Get all relations so that *m* is a refinement of *l* for two partitions *l* and *m*

*m* may be a refinement a positive integer

Arrange *l* so that it is ordered from larger number, find all the partition  $m = m_1 + \dots + m_M$  by permuting the original one so that there exist  $j_i$  satisfying  $l_1 + \dots + l_i = m_1 + \dots + m_{j_i}$  ( $1 \leq \forall i \leq L$ ), which are called refinements, and expressed by

$$[[l_1, [m_1, \dots, m_{j_1}], [l_2, [m_{j_1+1}, \dots, m_{j_2}], \dots] \quad (m_{j_\nu+1} \geq m_{j_\nu+2} \geq \dots \geq m_{j_{\nu+1}}, j_0 = 0).$$

and return the list of all refinements. Here the refinements which coincide by suitable arrangements of the partition of *l* are identified.

- `opt=2` : the order of the list  $\ell$  is kept and the order of refinements are distinguished.
- `opt=1` : returns 1 if there exists a refinement and 0 if otherwise.

```
[0] S=[4,4,2]$M=[2,2,2,1,1,1,1]$

[1] L=os_md.refinement2(M,S);

[[[4,[1,1,1,1]], [4,[2,2]], [2,[2]]], [[4,[2,1,1]], [4,[2,1,1]], [2,[2]]],

[[4,[2,1,1]], [4,[2,2]], [2,[1,1]]]]

[2] os_md.refinement2(M,S|opt=2);

[[[4,[1,1,1,1]], [4,[2,2]], [2,[2]]], [[4,[2,1,1]], [4,[2,1,1]], [2,[2]]],

[[4,[2,1,1]], [4,[2,2]], [2,[1,1]]], [[4,[2,2]], [4,[1,1,1,1]], [2,[2]]],

[[4,[2,2]], [4,[2,1,1]], [2,[1,1]]]]

[3] for(TL=L;TL!=[];TL=cdr(TL)) print(os_md.s2csp([car(TL)]));

1111222|442

2112112|442

2112211|442

[4] for(TL=L;TL!=[];TL=cdr(TL)) print(os_md.s2csp([car(TL)]|n=1));

(1 1 1 1) (2 2) (2)

(2 1 1) (2 1 1) (2)

(2 1 1) (2 2) (1 1)

[5] LL=os_md.refinement2([[2,[1,1]], [1,[1]], [1,[1]]],[2,2]);

[[[2,[[1,[1]], [1,[1]]]], [2,[[2,[1,1]]]]]]

[6] os_md.s2csp([car(LL)]);

1111|112|22

[7] os_md.s2csp([car(LL)]|n=1);

((1) (1)) ((1 1))

[8] os_md.ldepth(LL);

6
```

### 320. `refinements( $l$ | $opt=f$ )`

:: get all the refinements for several partitions of a positive integer

- `opt="s"` : Get all the unramified irregular spectra by the confluence of a given Fuchsian spectrum by strings using “, |” (cf. `s2csp()`).
- `opt="()"` : Get all the unramified irregular spectra by the confluence of a given Fuchsian spectrum by strings using “, ( )”.

```
[0] R=os_md.refinements("11,11,11,11" | opt="s")$

[1] for(T=R;T!=[];T=cdr(T)) print(car(T));

11,11,11,11

11|11|11|11

11,11|11|11

11,11,11|11

11|11,11|11

[2] R=os_md.refinements("11,11,11,11" | opt="()"$

[3] for(T=R;T!=[];T=cdr(T)) print(car(T));

1 1,1 1,1 1,1 1

(((1))) (((1))))
```

```

1 1,((1)) ((1))
1 1,1 1,(1) (1)
(1) (1),(1) (1)
[4] R=os_md.refinements("42,21111,21111|opt=""()")$
[5] os_md.mycat(R|delim="\n");
2 1 1 1 1,2 1 1 1 1,4 2
((1) (1) (1) (1)) ((2))
((2) (1) (1)) ((1) (1))
4 2,(2) (1) (1) (1)
2 1 1 1,(1 1 1 1) (2)
2 1 1 1,(2 1 1) (1 1)

321. comfamily(m)
:: get all maximal commuting family of $\{0, 1, \dots, m - 1\}$

[0] os_md.comfamily(3);
[[[0,1],[0,1,2]],[[0,2],[0,1,2]],[[1,2],[0,1,2]]]
[1] Com4=os_md.comfamily(4);
[[[0,1],[2,3],[0,1,2,3]],[[0,1],[0,1,2],[0,1,2,3]],[[0,1],[0,1,3],[0,1,2,3]],...
...,[[2,3],[1,2,3],[0,1,2,3]]]
[2] length(Com4);
15

```

### 3.2.6 Matrices

### 3.2.7 Strings

### 3.2.8 Permutations

### 3.2.9 $\text{\TeX}$

407. `show(p|opt=l,raw=1)`  
:: Displays *p* by using  $\text{\TeX}$  in a plausible format  
Display properly a differential operator, a list of eigenvalues with multiplicities, GRS etc. If the display is not good, we may put a option or use other functions with precise options.

- `opt="verb"` : Displays *p* by `dviout` as in the case `Risa/Asir`.
- `raw=1` : Returns the source in  $\text{\TeX}$ .  
The following are other cases.
- *p* is a polynomial or a rational function:
  - Displays of the resolution *p* into factors by using `fctrtos(p)`.
  - If the option `opt` is not indicated and *p* is considered to be a differential operator by `isdif(p)`, then *p* is displayed with the option `var="dif"`.
  - `opt="pfrac"`: Displays decomposition of *p* into partial fractions.
  - In the other case *p* is displayed by `fctrtos()` with all the options.
  - If *p* is very long, it is displayed by dividing lines (except the case when *p* is a monomial or a number).
- If *p* is a matrix, *p* is displayed by `mtotex(p|lim=1,small=2)`.
  - If the size of the matrix is very large, it is displayed by dividing into lines.
  - `opt=l` : Uses `mtotex()` with the option `var=l`.
- If *p* is list and all the elements of *p* are polynomials and *p* is long, it may be displayed by `eqls2tex()`. In this case the option `var=V` is valid, where *V* is a variable or the second

parameter of `eq2tex()`.

In the other case, if `opt` is indicated by a string or a list, then `p` is displayed by `ltoptex(p)` with all option parameters.

Otherwise:

- If `p` is a list corresponding to GRS or eigenvalues with multiplicities or list of strings, then `p` may be properly displayed. Here a list of eigenvalues with multiplicities means a list of the pairs of a non-negative integer and an equation or an integer. A list corresponding to GRS is a list of lists of eigenvalues with multiplicities.
- Suppose `p` is a list and the element of `p` is a list and moreover the element is a list of strings or equations (rational functions, vectors, matrices). If the list contains a string and an equation, `p` is displayed by using `ltoptex(p|opt=["cr","spts"])`. Here there is a string containing `\`, we put the options `opt=["cr","spts0"]` and `str=1`.
- `p` is a string:
  - `opt="raw"` : `p` is displayed as a string of `TEX`.
  - `opt="eq"` : `p` is considered as an equation and displayed with `\begin{equation} p \end{equation}`.
  - If the above options are not indicated and `\begin{f` is not contained and `\draw` or `\ar@` is contained in the first 128 characters, `p` is displayed by using `xyproc()` considering the setting of `TiKZ`.
  - In the other case, if `p` contains any of `\begin{equation}`, `\begin{align}` and `\[` and `p` does not contain any of `&` `^` and `_`, then `p` is directly displayed. Otherwise `p` is displayed by display style.
- In the other case, `p` is displayed by `dviout(p)`.

```
[0] os_md.show(2*2^x|raw=1);
2\cdot{}2^x
[1] os_md.show(1.2*2^x|raw=1);
1.2\cdot{}2^x
[2] os_md.show((x+0i)^2|raw=1);
x^2+(2\sqrt{-1})x-1
[3] os_md.show(2*(x+1)^2/y|raw=1);
\frac{2(x+1)^2}{y}
```

408. `dviout(p|clear=1,keep=1,delete=t,fctr=1,mult=1,subst=[s0,s1],eq=k,title=s)`

:: Displays `p`

- `dviout(@@)` means to display the last result.
- The command `dviout` should be executable in Windows. If it is not so, `risatex.bat` should be edited and another program (under other operating system such as Unix or Mac) can be used.
- Outputs a `LATEX` source file to `DIROUT/out.tex` and `DIROUT/risaout.tex` read it.
- If `p` is a string, it is regarded as a `LATEX` source by default but the following option indicates it a source of equations in `LATEX` and use

|                   |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|
| <code>eq=0</code> | : default display style                                                            |
| <code>eq=1</code> | : <code>\[</code> and <code>\]</code>                                              |
| <code>eq=2</code> | : <code>\begin{align}</code> and <code>\end{align}</code>                          |
| <code>eq=3</code> | : <code>\begin{gather}</code> and <code>\end{gather}</code>                        |
| <code>eq=4</code> | : <code>\begin{multiline}</code> and <code>\end{multiline}</code>                  |
| <code>eq=5</code> | : <code>\begin{align}\begin{split} &amp; \text{and } \end{split}\end{align}</code> |
| <code>eq=6</code> | : <code>\begin{align*} &amp; \text{and } \end{align*}</code>                       |

`eq=7` : `\begin{gather*}` and `\end{gather*}`  
`eq=8` : `\begin{equation}` and `\end{equation}`  
`eq=s` with a string  $s$  : `\begin{S}` and `\end{S}`  
 to display it in a display style.

- Substitute substrings  $s_0$  by  $s_1$  (multiple substitutions are possible. cf. [str\\_subst\(\)](#)).
- `p=" "` (a space) : displays again
- `clear=1` : displays equations with erasing the last display
- `keep=1` : rewrites the L<sup>A</sup>T<sub>E</sub>X source file without a display
- `delete=t` : erases the last  $t$  equations with labels of numbers ( $0 \leq t \leq 10$ ).
- `mult=1` : displays  $p$  in different lines for the elements when  $p$  is a list
- `fcrt=1` : displays  $p$  after factorizing it when  $p$  is a polynomial or a rational function.
- `tilde=s` : displays  $p$  with  $s$  when  $p$  is a string.

If source special is valid in `dviout`, a double click at the preview screen given by `dviout` starts up an editor and moves to the indicated point of the L<sup>A</sup>T<sub>E</sub>X source file.

If the source file is changed, it will be valid in the next display (for example, `dviout(" ")`).

- If `risatex.bat` or `risaout.tex` does not exists, they are made by `os_mulfid.rr` if the corresponding directory is writable. They can be edited according to the environment.  
`risatex.bat` should be executable (whose location is `get_rootdir()/bin` by default) and the file `risaout.tex` should be in the directory defined by `DIROUT` (cf. [DVIOUTA](#)).

#### 409. `dviout0( $\ell$ )` or `dviout0([ $\ell_1, \ell_2, \dots$ ])` or `dviout0( $\ell$ |opt= $s$ )`

:: Fundamental operations to display equations using T<sub>E</sub>X

- $\ell = 0$  : Erase display (`dviout(" ")|keep=1,clear=1`).
- $\ell = 1$  : Display (`dviout(" ")`).
- $\ell = 2$  : Erase and Display (`dviout(" ")|clear=1`).
- $\ell = 3$  : Shows values of `DIROUT`, `DVIOUTH`, `DVIOUTA`, `DVIOUTB`, `DVIOUTL`, `Canvas`, `TeXLim`, `TeXEq`, `AMSTeX`, `TikZ`, `XYPrec`, `XYcm`.
- $\ell = 4$  : Swaps `DVIOUTA` and `DVIOUTB` and shows `DVIOUTA`.  
 See [DVIOUTL](#) for an example of the result.
- $\ell = 5$  : Converts `DVIOUTA` and `DVIOUTB` form the default setting.
- $\ell = 6$  : Sets `TikZ 1` (to use `TikZ`).
- $\ell = 7$  : Sets `TikZ 1` (to use `Xy-pic`).
- $\ell > 10$  : Allows the size of matrix `AMSTeX` up to  $\ell$ .
- When  $\ell$  is a negative integer, it means `dviout(" ")|keep=1,delete=-\ell`, namely, the last  $\ell$  equations are erased.
- If  $\ell$  is a string, `\` followed by the string is put in the T<sub>E</sub>X file and begins a newline  
 For example, `dviout0("newpage")` means to start a new line.

The following string has an different meaning.

- `" "` : A space and a line feeds
- `"cls"` : Erase
- `"show"` : Display
- `"?"` : Shows the setting

- Several commands can be written as a list.
- If `opt=s` is indicated,  $s$  is replaced by  $\ell$  ( $s$  is a string).

In this case, if  $\ell = -1$ , the current value is returned,

$s$  can be `TikZ`, `TeXEq`, `TeXLim`, `XYPrec`, `XYcm`, `XYLim`, `DVIOUT`, `Canvas` or `TeXPages`.

In the case when  $s$  is `DVIOUT`, the setting of `DVIOUTA` and `DVIOUTB` are set to the initial values if  $s = 1$  and its converse if  $\ell = 1$ .

#### 419. `ltotex( $\ell$ |opt= $s$ , pre="string", cr="cr", small=1, lim= $\ell$ , var= $v$ )`

- :: Transforms a list to plausible TeX source which represents GRS or a table or a list etc.
- `show()` can be used to display the result (the same parameters are valid).
  - $s = "spt"$  : Transforms the list (given by `meigen( |mult=1)`) as a spectral type..
  - $s = "GRS"$  : Transforms the list (given by `sp2grs()`) as a GRS. In this case `pre` is valid.
  - $s = "coord"$  : Transforms the list to  $( , , \dots)$  as a coordinate.
    - `cpx=1` : Complex number  $a + b\sqrt{-1}$  is transformed to  $a + bi$  (by default).
    - `cpx=2` : Complex number  $a + b\sqrt{-1}$  is transformed to  $a + b\sqrt{-1}$ .
  - $s = ["Pfaff", u, x, x-y, \dots]$  : A list of matrices is transformed to a Pfaff form such as

$$du = \left( A_0 \frac{dx}{x} + A_1 \frac{d(x-y)}{x-y} + \dots \right) u.$$

- $s = ["Fuchs", u, x, x, x-y, x-1, \dots]$  : A list of matrices is transformed to a Fuchsian form such as

$$\frac{du}{dx} = \left( \frac{A_0}{x} + \frac{A_1}{x-y} + \frac{A_2}{x-1} + \dots \right) u.$$

- $s = "dform"$  : A list in the format given by `dform()` is considered as a differential form.

If  $\ell = [[(a*x-b*y)/(x), x, z], [(-a*x+b*y)/(y), y, z]]$ , we have

$$\left( \frac{ax - by}{x} \right) dx \wedge dz + \left( \frac{-ax + by}{y} \right) dy \wedge dz.$$

Here the coefficients are (matrices of) rational functions.

- $s = "vect"$  : Transforms the list as a column vector,
- $s = "cr"$  : Element are put in different lines.  
As in the following, `cr=` and `var=` are possible.
- $s = "spts"$  : Puts a space between the elements of the list and arranges elements as many as possible in each line.
- $s = "spts0"$  : Same as above but does not put a space.
  - `lim=l` : The line width is considered to be  $l$  as a number of characters. If  $l = 0$ , the limit is ignored.
  - `str=1` : Strings are considered usual strings in TeX
  - `cr=` : The code of a new line is indicated. It is `cr="\\\\\\n & "` by default.  
If it is an integer  $k$  with  $0 \leq k < 32$ , then the code of a new line is `texcr(k)`.  
Then  $k = 7 = 2 + 1 + 4$  by default and if  $k = 0$ , it is a space and if  $k = 15$ , it is `\\allowdisplaybreaks\\\\\\n&`.
  - `var=` : Defines a variable for matrices (cf. `mtotex()`), polynomials and rational functions (cf. `ltotex()`).
- $s = ["cr", "spts"]$  or  $s = ["cr", "spts0"]$  : Puts a new line between elements (`cr=` and `var=` can be indicated). If the element of the list is a list, the element follows the indication  $s = "spts"$  or  $s = "spts0"$  and moreover `str=1` can be indicated.  
If the elements of  $\ell$  is lists and we put `cr=[s1, s2]`, the elements of  $\ell$  will be separated by the code  $s_1$  and the elements of the lists will be separated by the code  $s_2$ .  $s_1$  and  $s_2$  can be strings or integers as above.
- $s = "text"$  : It is same as in the case  $s = "spts"$  but  $l$  is returns as in a text style. In this case `str=1` and `cr=` can be indicated.
- $s = "tab"$  and  $\ell$  is a list of lists : Returns a table `\begin{tabular}... \end{tabular}` in a text style.  
Replacing a long list  $\ell$  by  $[\ell]$  and using the option `width=w`, we can use this function to get a table (cf. `splibasic()`).
  - `title=s` : The string  $s$  is a title of the table.

- **left**=[ $s_1, s_2, \dots$ ] : Inserts the fist column of the table.  
If  $s_j=[s_{j,1}, s_{j,2}, \dots]$  for a suitable  $j$ , it will be repeated up to the last line, which is same in the following.
- **right**=[ $s_1, s_2, \dots$ ] : Inserts as the last column.
- **top**=[ $s_1, s_2, \dots$ ] : Inserts as the first line. If **right**= is indicated, the indication **right**= is processed before **top**=.
- **last**=[ $s_1, s_2, \dots$ ] : Inserts as the last line.
- **null**= $n$  : The element equals  $n$  is transformed into a space ( $n = " "$  by default).
- **hline**=[ $h_1, h_2, \dots$ ] : Inserts horizontal lines after  $h_i$ -th line. Here the top of the table without a title is indicated by 0 and the first line of the table is indicate by 1 and a multiple indication of the same number means a horizontal multiplet.
  - \* **z** : means (after) the last line. The indication **z-1** is possible.
  - \*  $v_j=[k_j, n_j]$  with a positive integer  $n_j$  and a non-negative integer  $n_j$  : Indicates  $k$ -th lines of the table with  $k = \nu n_j + k_j$  for  $\nu = 0, 1, 2, \dots$
- **vline**=[ $v_1, v_2, \dots$ ] : Indicates horizontal lines after  $v_j$ -th lines of the table.  
The first column is indicated by 1 and a multiple indication by a same number means a horizontal multiplet.
  - \* **z** means the last column of the table. The indication **z-1** is possible.
  - \*  $v_j=[k_j, n_j]$  with a positive integer  $n_j$  and a non-negative integer  $n_j$  : Indicates  $k$ -th columns with  $k = \nu n_j + k_j$  for  $\nu = 0, 1, 2, \dots$
- **align**= $s$  :  $s$  is the string to define the arrangement and vertical lines indicated as { $s$ } after `\begin{tabular}`. If this is indicated, **vline**= is ignored.  
But if  $s$  is a character, it is considered as a character defining the arrangement and the indication **vline**= is valid.
  - $s="r"$  : right,  $s="c"$  : center,  $d="l"$  : left.
- **vert**=1 : Transposes the table.
- **width**= $w$  : If  $w$  is a positive integer, the number of the columns of the table is limited by  $w$  and the table is changed int a piled table.  
If  $w$  is a negative integer, the number of the columns of the table is multiplied by  $|w|$  and the table is changed into a table with a smaller number of lines.
  - \* If **vert**=1 is indicated, the above transformation is processed after the transposition.

See examples [powprimroot\(\)](#).

To arrange the table it is convenient to so as follows. We transform the corresponding list to a matrix by `lv2m( |null=""")` and arrange the matrix by `madjust()`, `mtranspose()`, `mperm()`, `newbmat()` etc. and then transforms the matrix to a list by `m211()`.

- $s = "graph"$  and  $\ell$  is a list of numbers : Returns a bar graph by using XY-pic or TikZ. To put strings or numbers below the bar graph, we insert a list of the strings or the numbers after the last list of numbers.

If the number of the element of the list is smaller than the number of elements of the data in a line by 1, the strings or numbers are put between the bars.

- **size**= $\ell$  : Indicates the size of the graph.

$\ell$  is a list of numbers formed by the width of the graph, the hight of the graph, the ratio of the gap between bars and the width of a bar, which is ignored in the case of a line graph, the height between the graph and the strings, which is the same value as the former if it is not indicated.

They are omitted except the first and the second numbers.

The second element of  $\ell$  is a negative number  $-c$ , the height of the bar is indicated to be the number of the table  $\times c$ .

`TikZ=0, 1 :  $\ell = [80, 30, 1/2, 2], [8, 3, 1/2, 0.2]$`  respectively, by default.

If `horiz=1` is indicated, the 4-th values 4 and 0.2 are changed to 2 and 0.2, respectively, by default.

- `max=m` :  $m$  is a maximal value (which is automatically determined by default. This value is the height of the graph).
- `shift=n` : The bottom reference line is shifted by  $n$  (0 by default).
- `horiz=1` : A bar graph with horizontal bars.
- `line=1` : A line graph.
- `line=2` : Same as above with indicated the points by  $\bullet$ .
- `line=[n,t]` :  $n$  is 2 or 1 according to the use of points in a line graph.  
 $t$  indicates the style of lines which corresponds to the indication in XY-pic/TikZ. For example, `s="@{.}"/dotted` is a dotted line (cf. `xyarrow()`).
- `line=[-1,r]` : A pie chart with a circle of radius  $r$  mm.
- `value=0` : Does not show values.  
`value=1` : Shows the corresponding value even if the bar is shrunk to the bottom reference line.
- `strip=1` : The strings `\begin{xy} ... \end{xy}` or `\begin{tikzpicture} ... \end{tikzpicture}` are omitted.  
`strip=2` : The bottom reference line is omitted.  
`strip=3` : Only the values are shown (the part omitted by `value=0`).
- `color=s` : Colors and fills the graph if TikZ is used (same as in the case of `xybox()`). In the case of a pie graph  $s$  is a list of the indications to the data.
- `mult=1` : Draw several bar graphs or line graphs in one graph. In this case  $\ell = [[\ell_1, \ell_2, \dots], m]$  and `color` or `line` should be indicated by the corresponding list.  
`relative=1` : The values of  $\ell_1, \ell_2$  are transformed to the values added successively.  
If this is not indicated in the case of a bar graph, the element of  $\ell_{j+1}$  should be larger than or equals to the corresponding element of  $\ell_j$ .

- If  $R$  is returned and  $s = \text{"text", "tab"}$  or `"graph"`,  $R$  is displayed by `dviout( $R$ )` and by `dviout( $R|eq=5$ )` otherwise.
- `small=1` : Uses `\begin{smallmatrix}`.

```
[0] os_md.ltotex([a+b, c/d, [2,3]]);

\left\{

a+b,\, \frac{c}{d},\, [2,3]

\right\}

[1] os_md.dviout(@@|eq=5)$

[a + b, $\frac{c}{d}$, [2, 3]]

[2] L=[[12,a+b],[3,c],[1,d]];

[[12,a+b],[3,c],[1,d]]

[3] os_md.ltotex(L|opt="spt");

\left\{

[a+b]_{12},\, [c]_3,\, d

\right\}

[4] os_md.dviout(@@|eq=5)$

\{[a + b]_{12}, [c]_3, d\}
```

```

[5] LL=[[L, [[3,3*b], [2,f]]];
[[[12,a+b],[3,c],[1,d]], [[3,3*b],[2,f]]]
[6] os_md.ltotex(LL|opt="GRS",pre=" 0 & 1\\\\\\n");
\begin{Bmatrix}
0 & 1 \\
[a+b]_{12} & [3b]_3 \\
[c]_3 & [f]_2 \\
d &
\end{Bmatrix}
\end{Bmatrix}
[7] os_md.dviout(@@|eq=5)$

$$\begin{pmatrix} 0 & 1 \\ [a+b]_{12} & [3b]_3 \\ [c]_3 & [f]_2 \\ d & \end{pmatrix}$$

[8] A=newmat(2,2,[[a,b],[c,d]]);

[a b]

[c d]
[9] B=newmat(2,2,[[p,q],[r,s]]);

[p q]

[r s]
[10] os_md.ltotex([A,B]|opt=["Pfaff",u,x-1,y]);
du= \Biggl(\begin{pmatrix} a & b \\ c & d \end{pmatrix} \frac{d(x-1)}{x-1} + \begin{pmatrix} p & q \\ r & s \end{pmatrix} \frac{dy}{y}\Biggr)u

a&b \\
c&d
\end{pmatrix} \frac{d(x-1)}{x-1}\\
\\&
+ \begin{pmatrix} p & q \\ r & s \end{pmatrix} \frac{dy}{y}
\Biggr)u
\Biggr)u

[11] os_md.dviout(@@|eq=5,subst=["\\\\&","%"])$

$$du = \left(\begin{pmatrix} a & b \\ c & d \end{pmatrix} \frac{d(x-1)}{x-1} + \begin{pmatrix} p & q \\ r & s \end{pmatrix} \frac{dy}{y} \right) u$$

[12] os_md.ltotex([A,B]|opt=["Fuchs",u,x,x,x-1]);
\frac{du}{dx}= \Biggl(\frac{\begin{pmatrix} a & b \\ c & d \end{pmatrix} \frac{d(x-1)}{x-1} + \begin{pmatrix} p & q \\ r & s \end{pmatrix} \frac{dy}{y}}{x}\Biggr)
a&b \\
c&d
\end{pmatrix} \frac{d(x-1)}{x-1}\\
+ \frac{\begin{pmatrix} p & q \\ r & s \end{pmatrix} \frac{dy}{y}}{x}
\Biggr)

```

```

\end{pmatrix}\{x-1\}
\Biggr)u

[13] os_md.dviout(os_md.smallmatex(@@|eq=5);

$$\frac{du}{dx} = \left(\frac{\begin{pmatrix} a & b \\ c & d \end{pmatrix}}{x} + \frac{\begin{pmatrix} p & q \\ r & s \end{pmatrix}}{x-1} \right) u$$

[14] P=[[2*a,x,y],[(a+b)^2,y,z],[-2,x,z/y]]$
[15] os_md.ltotex(P|opt="dform");
2a\, dx\wedge dy+(a^2+2ba+b^2)\,\, ,dy\wedge dz-2\,\, ,dx\wedge d(\frac{z}{y})y
[16] os_md.dviout(@@|eq=5,subst=["\\frac","\\tfrac"]);

$$2a\, dx \wedge dy + (a^2 + 2ba + b^2) dy \wedge dz - 2\, dx \wedge d(\frac{z}{y})$$

[17] os_md.ltotex(["There are", (n+1)^2, "points."]);
[\texttt{There are}, n^2+2n+1, \texttt{points.}]
[18] os_md.dviout(@@|eq=5)$
[There are, $n^2 + 2n + 1$, points.]
```

[19] os\_md.ltotex(["There are", (n+1)^2, "points."]|opt="text");
\$ \texttt{There are} \$  
\$ n^2+2n+1 \$  
\$ \texttt{points.} \$

[20] os\_md.dviout(@@)\$

There are  $n^2 + 2n + 1$  points.

[21] os\_md.ltotex(["There are", (n+1)^2, "points."]|opt="text", str=1);  
There are  $n^2+2n+1$   
points.

[22] os\_md.dviout(@@)\$


There are  $n^2 + 2n + 1$  points.

[23] L=[10,12,34,53,23,12,24,68,55,57,32,20]\$  
[24] M=[1,2,3,4,5,6,7,8,9,10,11,12]\$  
[25] os\_md.dviout(os\_md.ltotex([M,L]|opt="tab", title="Year 2014"));

We display the above TeX source.


| Year 2014 |    |    |    |    |    |    |    |    |    |    |    |
|-----------|----|----|----|----|----|----|----|----|----|----|----|
| 1         | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 10        | 12 | 34 | 53 | 23 | 12 | 24 | 68 | 55 | 57 | 32 | 20 |

[26] os\_md.dviout(os\_md.ltotex([L,M]|opt="graph"));

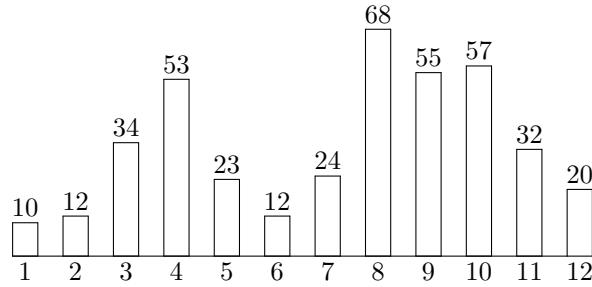

```
[27] L=[10,12,-10,34,53,23,-12,24,48,52,38,32,20]$
```


```
[28] os_md.ltotex(L|opt="graph");
```

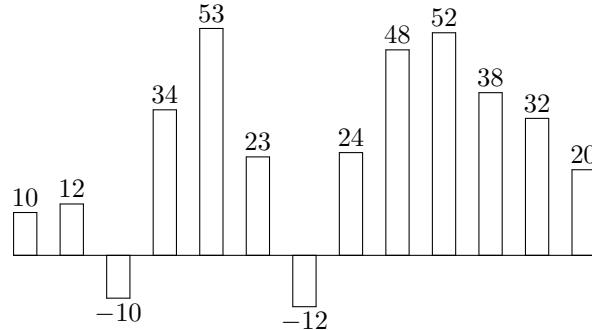

```
[29] L=[12,15,10,8,12,14,19,15,17,13,10,15]$
```

```
[30] M=["Jan","Feb","Mar","Apr","May","Jun","Jul","Aug","Sep","Oct","Nov",
"Dec"]$
```

```
[31] os_md.ltotex([L,LL]|opt="graph",line=[2,"@{.}"],shift=5,size=[100,40]);
```

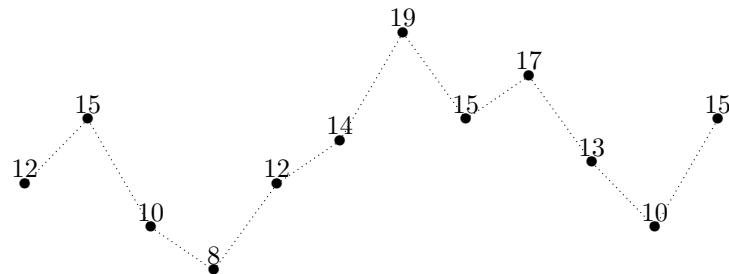

Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec

```
[32] L=cons("number",L)$
```

```
[33] M=cons("Month",M)$
```

```
[34] os_md.ltotex([M,L]|opt="tab",hline=[0,1,2],vline=[0,1,1,13],
title="Year 2014");
```


Year 2014

| Month  | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| number | 12  | 15  | 10  | 8   | 12  | 14  | 19  | 15  | 17  | 13  | 10  | 15  |

```
[35] L=[35,42,19,38]$
```

```
[36] LL=["spring","summer","autumn","winter"]$
```

```
[37] os_md.ltotex([L,LL]|opt="graph",line=[-1,15]);
```



```
[38] L=[5,12,25,13,22,17,3,2]$

[39] M=[0.5,1,1.5,2,2.5,3,3.5]$

[40] os_md.dviout0(1|opt="TikZ")$

[41] os_md.ltotex([L,M]|opt="graph",color="fill=blue!50",size=[4.5,-0.1,1]);

/* width 4.5cm, height x 0.1, ratio (width) 1 */

\begin{tikzpicture}

\draw(0,0)--(4.5,0);

\draw[fill=blue!50](0,0)rectangle(0.563,0.5);

\node at(0.281,0.7){5};

\node at(0.563,-0.2){0.5};

\draw[fill=blue!50](0.563,0)rectangle(1.125,1.2);

...

[42] L2=[10,18,35,20,27,22,8,6]$

[43] os_md.ltotex([[L,L2],M]|opt="graph",color=["fill=blue!40","fill=blue!20"],

size=[4.5,-0.1,1],mult=1);

[44] L3=lsub([L2,L]);

[5,6,10,7,5,5,5,4]

[45] os_md.ltotex([[L,L3],M]|opt="graph",color=["fill=blue!40","fill=blue!20"],

size=[4.5,-0.1,1],mult=1,relative=1);

[46] N=cons(0,M);

[0,0.5,1,1.5,2,2.5,3,3.5];

[47] os_md.ltotex([L,N]|opt="graph",color="fill=blue!40",

size=[4.5,-0.1,1],horiz=1);

[48] os_md.ltotex([[L,L3],N]|opt="graph",color=["fill=blue!40",

"fill=blue!20"],size=[4.5,-0.1,1,0.5,0.25],mult=1,horiz=1,relative=1);

[49] os_md.ltotex([L,N]|opt="graph",line=[2,"red"],size=[4.5,-0.1,1]);

[50] L3=[8,17,21,24,15,12,9,6]$


[51] os_md.ltotex([[L,L3],N]|opt="graph",line=[[1,"red"],[1,"blue"]],mult=1,

size=[4.5,-0.1,1],value=0);

[52] L=[35,42,19,38]$LL=[["spring","summer","autumn","winter"]]

[53] os_md.ltotex([L,LL]|opt="graph",line=[-1,15],color=["fill=yellow!30",

"fill=green!30","fill=red!30","fill=blue!30"]);
```

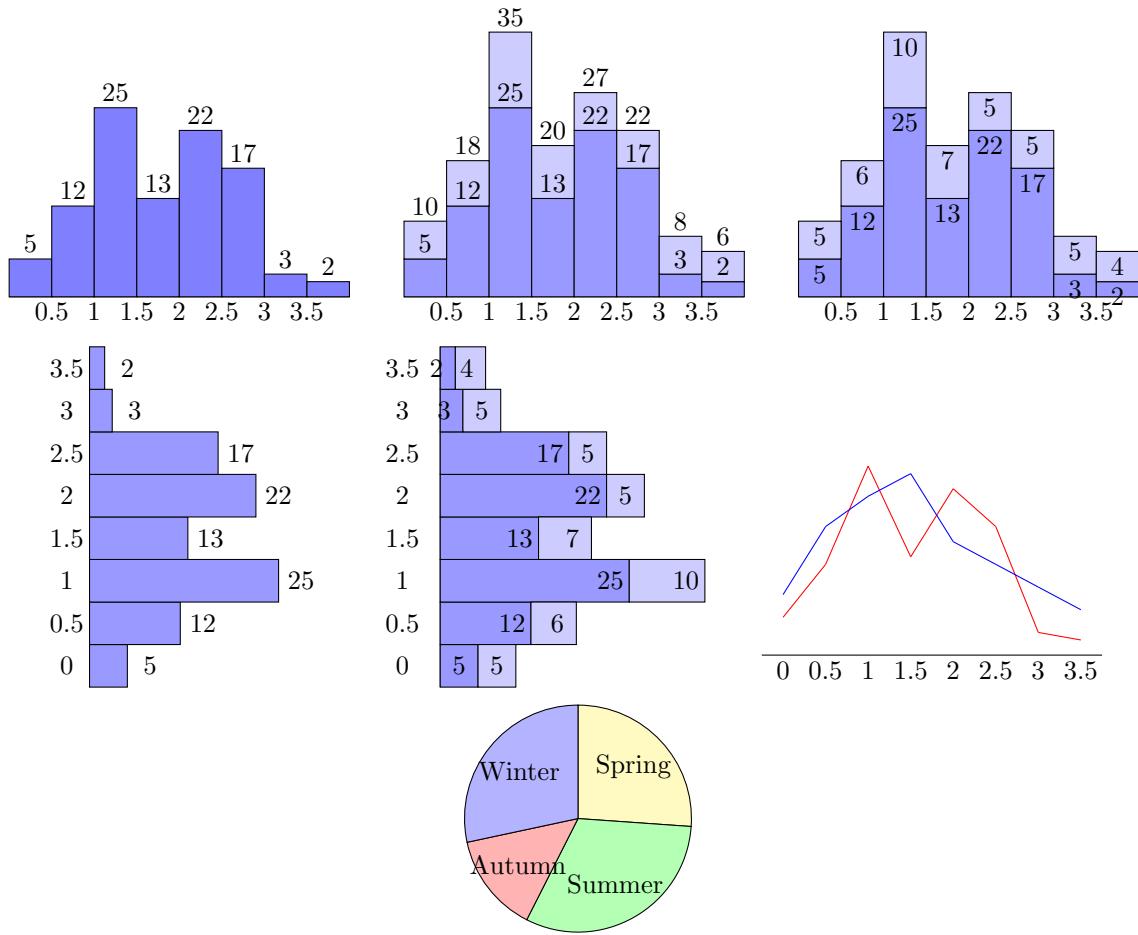

### 3.2.10 Lines and curves

### 3.2.11 Drawing curves and graphs

### 3.2.12 Applications

#### 3.2.12.1 Make tables

#### 3.2.12.2 Make tables and matrices

#### 3.2.12.3 Mathematical tables

#### 3.2.12.4 Table of score distribution

#### 3.2.12.5 Tayler's expansion

#### 3.2.12.6 Slide Scale

### 3.2.13 Environments

#### 487. Canvas

:: Default size of the canvas of Risa/Asir

#### 488. AMSTeX

:: TeX means *AMSLATeX* if this value equals 1

In `os_multif.rr` `AMSTeX=1` by default. If otherwise, the TeX source created some functions may not be correct.

```

[0] M=newmat(2,2,[[a,b],[c,d]]);

[a b]

[c d]

[1] AMSTeX=0$

[2] print_tex_form(M);

\pmatrix{

{a}& {b} \cr

{c}& {d} \cr
}

[3] AMSTeX=1$

[4] print_tex_form(M);

\begin{pmatrix}

{a}& {b} \\

{c}& {d}

\end{pmatrix}

[5] os_md.my_tex_form(M);

\begin{pmatrix}

a&b \\

c&d

\end{pmatrix}

[6] print_tex_form(x_1+x_2^2/y);

\frac{ {x}_1 {y}+ {x}_2^{ 2} }{ {y} }

[7] os_md.my_tex_form(x_1+x_2^2/y);

\frac{x_1y+x_2^2}{y}

```

#### 489. TeXEq

:: Default display style of LATEX ([dviout0\(3\)](#) shows it)

The value TeXEq is one of 1, 2, 3, 4, 5, 6, 7 and it corresponds to the value of the option parameter eq= of [dviout\(\)](#).

When AMSTeX=1, the default is 5 and when AMSTeX=0 it is TeXEq=1.

It can be changed by [dviout0\(n|opt="TexEq"\)](#).

#### 490. TeXLim

:: Maximal width referred to divide a long equations into lines by LATEX

- The number means an estimated length measured by the number of characters.
- It can be defined in [.muldif](#) and [dviout0\("?\)](#) shows the value.
- [texlim\(1,n\)](#) or [dviout0\(n|opt="TexLim"\)](#) can change the value (the default value is 80).

#### 491. TexPages

:: Threshold value of the numbers of lines for a page in a display style of TeX (cf. [fctrtos\(\)](#))

- [dviout0\(n|opt="TexPages"\)](#) can change the value (80 by default).

#### 492. TikZ

:: Flag using XY-pic or TikZ in TeX

TikZ=1 : TikZand , TikZ=0 : XY-pic

The flag is changed by [dviout0\(6\)](#), [dviout0\(7\)](#) or [dviout0\(1|opt="TikZ"\)](#), [dviout0\(0|opt="TikZ"\)](#).

#### 493. XYPrec

:: Number of figures after the decimal point in the expression of coordinates for graphic display

It can be changed by `dviout0(n|opt="XYPrec")`.

494. XYcm

:: Unit is cm even in XY-pic

It can be changed by `dviout0(0|opt="XYcm")` or `dviout0(1|opt="XYcm")`.

495. XYLim

:: Maximal number of coordinates for a line in a source of XY-pic or TikZ

It can be changed by `dviout0(n|opt="XYLim")`.

496. DVIOUTH

:: A program to show explanations of functions indicated by `myhelp()`

- This can be define in `.muldif` and `dviout0("?)` shows the definition.
- The default setting when the command `dviout` works in Windows is

```
start dviout -2 -hyper:0x90 "%ASIRROOT%\help\os_muldif.dvi" #%LABEL%
- This means that 2-nd dviout shows the place labeled by %LABEL% (which myhelp(s)
 replaces it by s) of get_rootdir()\help\os_muldif.dvi.
- If dviout is installed in Windows and the command dviout does not work, the full
 pathname can be indicated.
- The indication -hyper:0x90 means to show the hot spot in blue (which is similar in
 ox_muldif.pdf). If it is not indicated, the underline is also shown,
```

In `dviout` this setting can be changed by Option → Setup parameters... → HyperTeX → Color and the button OK. If the value `-hyper:` is set by the value defined by `hyper=` in Option → Non-default Parameters, the hot spot is shown by the setting.

The explanation of `fn` exists in the place with the label `r:fn`. If it contains the underscore `_`, it is omitted in the label.

- `myhelp()` shows the explanation of an indicated function `%ASIRROOT%` is replaced by `get_rootdir()` and `%LABEL%` is replaced by the corresponding label as above and then `myhelp()` shows the explanation of the indicated function

497. DIROUT

:: Directory where the source file of LATEX is put (it should be writable)

498. DVIOUTA

:: Pathname of a program which compiles a source `risaout.tex` of LATEX under AMSTEX and displays it

499. DVIOUTB

:: Pathname of a program which compiles a source `risaout10.tex` (or `risaout10.tex`) of LATEX under AMSTEX and displays it. We can choose this setting or DVIOUTA in Risa/Asir

500. DVIOUTL

Pathname of a program which compiles a source `risaout0.tex` of LATEX and displays it

We can set it in `.muldif`, and the values are obtained by the command `dviout0("?)`.

The default under Windows is

```
[0] os_md.dviout0(3)$
DIROUT ="%HOME%\tex"
DVIOUTH="start dviout -2 -hyper:0x90 "%ASIRROOT%\help\os_muldif.dvi" #%LABEL%
DVIOUTA="%ASIRROOT%\bin\risatex.bat"
DVIOUTB="%ASIRROOT%\bin\risatex1%TikZ%.bat"
DVIOUTL="%ASIRROOT%\bin\risatex0.bat"
Canvas = [400,400]
TeXPages = 20
TeXLim = 80
```

```

TeXEq = 5
AMSTeX = 1
TikZ = 0
XYPrec = 3
XYcm = 0
XYLim = 4

```

The default setting under other platforms is

```

[0] os_md.dviout0(3)$
DIROUT ="%HOME%/asir/tex"
DVIOUTH="%ASIRROOT%/help/os_muldif.pdf"
DVIOUTA="%ASIRROOT%/bin/risaout.sh"
DVIOUTB="%ASIRROOT%/bin/risaout1%TikZ%.sh"
DVIOUTL="%ASIRROOT%/bin/risaout0.sh"
DVIOUTL="%ASIRROOT%/bin\risatex0.bat"
TeXPages = 20
Canvas = [400,400]
TeXLim = 80
TeXEq = 5
AMSTeX = 1
TikZ = 0
XYPrec = 3
XYcm = 0
XYLim = 4

```

Here `%TikZ%` is the value of `TikZ`, `%ASIRROOT%` is the install directory obtained by `get_rootdir()`, `%HOME%` means the value of environment variable `HOME` but the latter equals `%ASIRROOT%` by default in Windows.

In `.muldif`, `%ASIRROOT%` and `%HOME%` are not allowed to contain spaces and they should be indicated by using " as

```

DIROUT ="\"%HOME%\asir\tex\""
DVIOUTA="\"%ASIRROOT%\bin\risaout.bat\""
DVIOUTB="\"%ASIRROOT%\bin\risaout1%TikZ%.bat\""
DVIOUTL="\"%ASIRROOT%\bin\risaout0.bat\""

```

if necessary.

#### 501. `.muldif`

:: `os_muldif.rr` reads this file when it starts up

- If `.muldif` is in `%HOME%`, it is read when `os_muldif.rr` is loaded. It is also searched in `%HOME%/asir`, `%ASIRROOT%`, `%ASIRROOT%/bin`, `%ASIRROOT%/lib-asir-contrib` in this order. Here `%ASIRROOT%` is equal to `get_rootdir()`. Moreover `%HOME%` coincides with the environment variable `HOME` and it is also coincides with `%ASIRROOT%` under Windows.
- The values `TeXLim`, `TeXPages`, `TeXEq`, `DIROUT`, `DVIOUTA`, `DVIOUTB`, `DVIOUTL`, `DVIOUTH`, `TikZ`, `XYPrec`, `XYcm`, `XYLim`, `Canvas` can be changed from the default values.
- The current setting can be obtained by `dviout0(3)`.

An example of `.muldif` is

```
DVIOUTH="start c:\\dviout\\dviout -2 \"%ASIRROOT%\\help\\os_muldif.dvi\" #%LABEL%"
end$
```

Following the format of C, the letter \ and " in a word should be written by \\ and \" etc. (It may be unnecessary in many cases). Beginning of a sequence of strings and its end can be clarified by ".

## 502. `risatex.bat`

:: Program compiling the L<sup>A</sup>T<sub>E</sub>X file which `os_muldif.rr` outputs and displaying it on a screen

- `os_muldif.rr` outputs a source file `out.tex` (or `out0.tex`) of L<sup>A</sup>T<sub>E</sub>X to get a nice display of resulting results and equations on a screen and then `risatex.bat` called by `os_muldif.rr` reads it from `risaout.tex` (or `risaout1.tex`, `risaout0.tex`) and compiles it into a `dvi` file or a `pdf` file and display them. Here `risaout1.tex` or `risaout0.tex` is called by `risaout0.bat` as in the case of `risatex.bat`.
- **DVIOUTA** (or **DVIOUTB**, **DVIOUTL**) indicates the above. We can define three different ways to process the L<sup>A</sup>T<sub>E</sub>X file using DVIOUTA, DVIOUTB and DVIOUTL.

Examples of settings to display results and equations using T<sub>E</sub>Xare as follows.

- The default setting of `risatex.bat` which is located in `get_rootdir()\\bin` is (cf. **DVIOUTA**) :
- ```
cd "c:\\Program Files\\asir\\tex"
platex -src=cr,display,hbox,math,par risaout
start dviout -1 "c:\\Program Files\\asir\\tex\\risaout" 1000
- c:\\Program Files\\asir in the above is replaced by get_rootdir(). In the first line cd indicates the directory given by DIROUT where os_muldif.rr outputs a LATEX file. The directory should be writable.
- If the command dviout does not work, it should be indicated by its full pathname or it should be replaced by another program to display the compiled file processed by TEX system.
- The last parameter -1 in the last line indicates to the command to the 1-st dviout. It will start up if it is not so.
- The last parameter 1000 indicated the page to be displayed. If it is sufficiently large, it means the last page. The equations to be displayed will be added at the end.
```

An example of `risaout.tex` whose location is given by **DIROUT**:

```
\documentclass[a4paper]{amsart}
\usepackage{amsmath, amssymb, amsfonts}
\pagestyle{empty}
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}
```

The following example allows longer equations in a line. Moreover XY-pic (or TikZ) will be loaded to handle several graphics.

```
\documentclass[a4paper]{amsart}
\usepackage{amsmath, amssymb, amsfonts}
\AtBeginDvi{\special{dviout -y=A3L}}
\usepackage[all]{xypic}
\pagestyle{empty}
\textwidth=7.6in
\textheight=11in
```

```

\voffset=-1.4in
\hoffset=-1.4in
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}

```

If a pdf file is created by \TeX by dvipdfmx or pdf \TeX , it is better to change the above \usepackage[all]{xypic} by \usepackage[pdf,all]{xypic} so that a better pdf is created.

To set it by DVIOUTB (which os_muldif.rr uses by the command `dviout0(4)`), we put the following `risaoutpdf.tex` in `c:\Program Files\asir\tex`

```

\documentclass[a4paper]{amsart}
\usepackage{amsmath,amssymb,amsfonts}
\usepackage{pdf,all}{xypic}
\pagestyle{empty}
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}

```

and moreover `risatex1.bat` may be

```

cd "c:\Program Files\asir\tex"
platex risaoutpdf
dvipdfmx risaoutpdf
risaoutpdf.pdf

```

and `risatex1.bat` is indicated by DVIOUTB with its full pathname.

To display the pdf by SumatraPDF.exe, the last line in the above may be replaced by

```
"c:\Program Files\SumatraPDF\SumatraPDF.exe" -reuse-instance risaoutpdf.pdf
```

If we use TikZ in place of XY-pic, which is more desirable, `risaoutpdf.tex` may be as follows:

```

\documentclass[dvipdfmx,a4paper]{amsart}
\usepackage{amsmath,amssymb,amsfonts}
\usepackage{tikz}
\pagestyle{empty}
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}

```

To use graphics with TikZ , we put a line

`TikZ=1`

in `.muldif`. This can be changed by `dviout0(6)` or `dviout0(7)` after loading `os_muldif.rr`.

To use both of XY-pic and TikZ , we set as follows.

Since `%TiKZ%` in DVIOUTB is replaced by the value `%TiKZ%`, we change the filenames of `risaoutpdf.tex` and `risaoutpdf0.tex` to `risaoutpdf0.tex` and `risaoutpdf1.tex` which correspond to XY-pic and TikZ respectively, and `risatex10.bat` are `risatex11.bat`

```

cd "c:\Program Files\asir\tex"
platex risaoutpdf0
dvipdfmx risaoutpdf0
"c:\Program Files\SumatraPDF\SumatraPDF.exe" -reuse-instance risaoutpdf0.pdf
and

```

```

cd "c:\Program Files\asir\tex"
platex risaoutpdf1
dvipdfmx risaoutpdf1
"c:\Program Files\SumatraPDF\SumatraPDF.exe" -reuse-instance risaoutpdf1.pdf

```

We may use XY-pic and TikZ at a time and then its example is

```

\documentclass[dvipdfmx,a4paper]{jsarticle}
\usepackage{amsmath,amssymb,amsthm,amscd,mathrsfs}
\usepackage{tikz}
%\usetikzlibrary{patterns,shapes} % if necessary
\usepackage[pdf,all]{xy}
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}

```

- In the case **AMSTeX=0**, **risatex0.bat** and **risaout0.tex** are used and they are as follows by default.

```

cd "c:\Program Files\asir\tex"
platex -src=cr,display,hbox,math,par risaout0
start dviout -1 "c:\Program Files\asir\tex\risaout0" 1000
\documentclass{article}
\pagestyle{empty}
\begin{document}
\thispagestyle{empty}
\input{out0}
\end{document}

```

- Under Unix or Mac, **risatex.bat** may be replaced by **risatex.sh** which is the default name and we set it executable (`chmod 755`). For example, it is

```

#!/bin/sh
cd ${HOME}/asir/tex
platex -src=cr,display,hbox,math,par risaout
dvipdfmx risaout
evince risaout.pdf &
or
#!/bin/sh
cd ${HOME}/asir/tex
/usr/local/texlive/2014/bin/x86_64-darwin/platex risaout
/usr/local/texlive/2014/bin/x86_64-darwin/dvipdfmx risaout
open -a Preview risaout.pdf

```

In this case `risaout.tex` may be

```
\documentclass[a4paper]{amsart}
\usepackage{amsmath,amssymb,amsfonts}
\usepackage[pdf,all]{xy}
\pagestyle{empty}
\begin{document}
\thispagestyle{empty}
\input{out}
\end{document}
```

Here `risatex0.bat` and `risatex1.bat` may be `risatex0.sh` and `risatex1.sh`.

- `risaout.tex` and `risaout0.tex` do not exist in `DIROUT` and the directory is writable, they are automatically created if necessary.

3.2.14 Suppliment

3.2.14.1 Input matrices

3.2.14.2 Plane figure

3.2.14.3 Function by list

3.2.14.4 Analyze functions with values in real/complex numbers

3.2.14.5 Data by table

3.2.14.6 Finite sets

3.3 Functions in the original library

3.4 Functions in the contributed library

Bibliography

- [Apéri] R. Apéry, Irrationalité de $\zeta(2)$ et $\zeta(3)$, Journées arithmétiques de Luminy, Astérisque no.61, (1979), 11–13.
- [Batut et al.] C. Batut, D. Bernardi, H. Cohen, M. Olivier, *User's Guide to PARI-GP*, 1993.
- [Becker-Weispfenning] T. Becker, V. Weispfenning, *Groebner Bases*, Graduate Texts in Math. **141**, Springer-Verlag, 1993.
- [Boehm-Weiser] H. Boehm, M. Weiser, *Garbage Collection in an Uncooperative Environment*, Software Practice & Experience, September 1988, 807–820.
- [DR] M. Dettweiler and S. Reiter, *An algorithm of Katz and its applications to the inverse Galois problems*, J. Symbolic Comput. **30**(2000), 761–798.
- [Gebauer-Moeller] R. Gebauer, H. H. Moeller, *An installation of Buchberger's algorithm*, J. of Symbolic Computation **6**, 275–286.
- [Giovini et al.] A. Giovini, T. Mora, G. Niesi, L. Robbiano, C. Traverso, “One sugar cube, please” OR Selection strategies in the Buchberger algorithm, Proc. ISSAC'91, 49–54.
- [Ha] Y. Haraoka, Middle convolution for completely integrable systems with logarithmic singularities along hyperplane arrangements, Adv. Studies in Pure Math. **62**(2012), 109–136.
- [Hiroe-Kawakami-Nakamura-Sakai] K. Hiroe, H. Kawakami, A. Nakamura and H. Sakai, *4-dimensional Painlevé-type equations*, MSJ Memoirs vol.37, Mathematical Society of Japan, 2018.
- [Hiroe-Oshima] K. Hiroe and T. Oshima, *A classification of roots of symmetric Kac-Moody root systems and its application*, Symmetries, Integrable Systems and Representations, Springer Proceedings in Mathematics and Statistics **40** (2012), 195–241.

- [Matsubara-Oshima] *Generalized hypergeometric functions with several variables*, to appear in Indagationes Mathematicae (2024).
- [Morier-Genoud and Ovsienko] S. Morier-Genoud and V. Ovsienko, *q -deformed rationals and q -continued fractions*, arXiv:1812.00170, 2020.
- [Noro-Takeshima] M. Noro, T. Takeshima, *Risa/Asir – A Computer Algebra System*, Proc. ISSAC'92, 387–396.
- [Noro-Yokoyama] M. Noro, K. Yokoyama, *A Modular Method to Compute the Rational Univariate Representation of Zero-Dimensional Ideals*, J. Symb. Comp. **28/1** (1999), 243–263.
- [O1] T. Oshima, *Annihilators of generalized Verma modules of the scalar type for classical Lie algebras*, “Harmonic Analysis, Group Representations, Automorphic forms and Invariant Theory”, in honor of Roger Howe, Vol. 12, Lecture Notes Series, 2007, 277–319, National University of Singapore.
- [O2] T. Oshima, *special functions and algebraic linear ordinary differential equations*, in Japanese, Lecture note **11**, Department of Mathematics Univ. of Tokyo 2011, <http://www.ms.u-tokyo.ac.jp/publication/documents/spfct3.pdf>.
- [O3] T. Oshima, *Fractional calculus of Weyl algebra and Fuchsian differential equations*, MSJ Memoirs **28**, Mathematical Society of Japan, Tokyo, 2012.
- [O4] T. Oshima, *Drawing Curves*, Mathematical Progress in Expressive Image Synthesis III, edited by Y. Dobashi and H. Ochiai, Mathematics for Industry, **24** (2016), 95–106, Springer.
- [O5] T. Oshima, *Transformation of KZ type equations*, Microlocal Analysis and Singular Perturbation Theory, RIMS Kôkyûroku Bessatsu **B61** (2017), 141–162.
- [O6] T. Oshima, *os_muldif.rr*, a library of the calculation of differential operators for computer algebra *Risa/Asir*, 2007–2022, <https://www.ms.u-tokyo.ac.jp/~oshima>
- [O7] T. Oshima, Semilocal monodromy of rigid local systems, Formal and Analytic Solutions of Diff. Equations, Springer Proceedings in Mathematics and Statistics **256**(2018) 189–199,
- [O8] T. Oshima, Counting numbers, in Japanese, Sûgaku Shobo, 2019, 226 pp.
- [O9] T. Oshima, *Confluence and versal unfolding of Pfaffian systems*, Josai Mathematical Journal **12**(2020), 117–151.
- [O10] T. Oshima, *Versal unfolding of irregular singularities of a linear differential equation on the Riemann sphere*, Publ. RIMS Kyoto Univ. **57** (2021), 893–920.
- [Okt] T. Oshima, *Middle convolution of KZ-type equations and single-elimination tournaments*, to appear.
- [Osp] T. Oshima, *Algorithm classifying roots of star-shaped Kac-Moody root systems*, <https://www.ms.u-tokyo.ac.jp/~oshima/paper/spbasic.pdf>
- [OSe] T. Oshima and J. Sekiguchi, *Eigenspaces of invariant differential operators on an affine symmetric spaces*, Invent. Math. **57**(1980), 1–81.
- [OSh] T. Oshima and N. Shimeno, *Heckman-Opdam hypergeometric functions and their specializations*, RIMS Kôkyûroku Bessatsu **B20** (2010), 129–162.
- [Saito-Sturmels-Takayama] M. Saito, B. Sturmfels, N. Takayama, *Groebner deformations of hypergeometric differential equations*, Algorithms and Computation in Mathematics **6**, Springer-Verlag (2000).
- [Shimoyama-Yokoyama] T. Shimoyama, K. Yokoyama, *Localization and primary decomposition of polynomial ideals*, J. Symb. Comp. **22** (1996), 247–277.
- [Shoup] V. Shoup, *A new polynomial factorization algorithm and its implementation*, J. Symb. Comp. **20**(1995), 364–397.
- [OEIS] N. Sloane. The on-line encyclopedia of integer sequences, 1964–, <https://oeis.org/>.
- [Traverso] C. Traverso, *Groebner trace algorithms*, Proc. ISSAC '88(LNCS 358), 125–138.
- [Yokoyama] K. Yokoyama, *Prime decomposition of polynomial ideals over finite fields*, Proc. ICMS, (2002), 217–227.
- [Weber] K. Weber, *The accelerated Integer GCD Algorithm*, ACM TOMS, **21**, **1**(1995), 111–122.